

Features

- 1-channel isolated barrier
- 24 V DC supply (bus powered)
- 2-, 3-, and 4-wire RTDs or potentiometer
- Linearized output 4 mA ... 20 mA
- Sensor breakage detection
- Simple span and zero selection

Function

This isolated barrier is used for intrinsic safety applications. It is a temperature converter that accepts input from resistance temperature detectors (RTD) or potentiometers from a hazardous area and converts them to an isolated analog current signal in the safe area.


Input type, range, and error handling parameters are configurable by DIP switches and potentiometers.

The output is isolated from the input and are referenced to the power supply common.


This module mounts on a HiD Termination Board.

Assembly

Front view

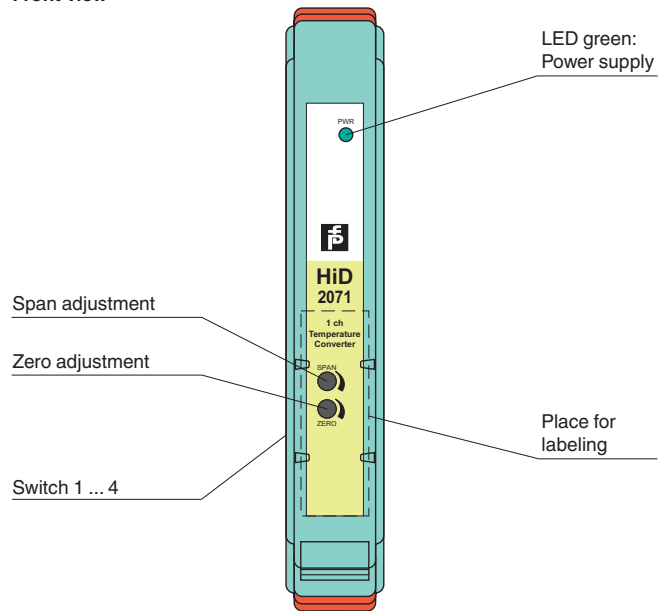

Connection

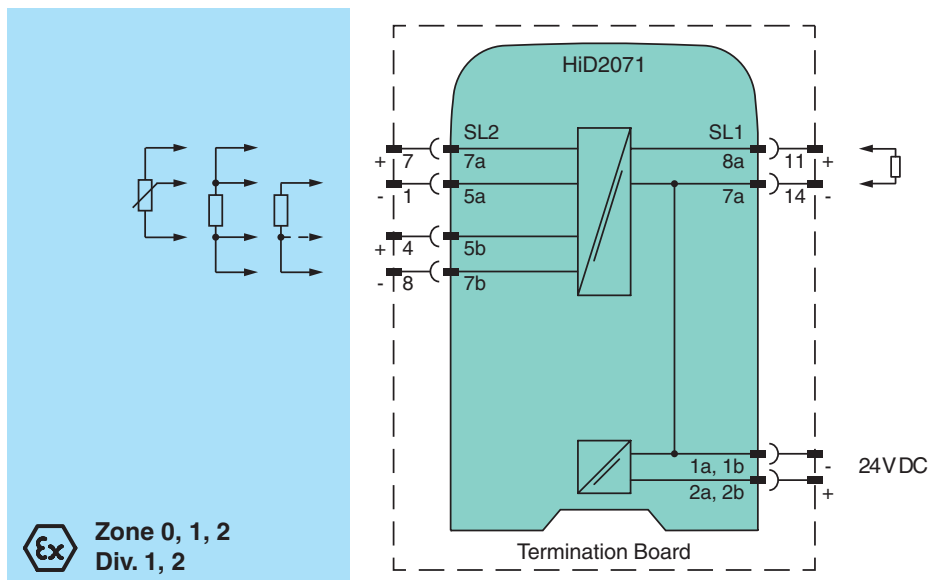

Release date 2017-08-09 14:50 Date of issue 2017-08-10 12:1442_eng.xml



Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com


General specifications		
Signal type		Analog input
Supply		
Connection		SL1: 1a(-), 1b(-); 2a(+), 2b(+)
Rated voltage	U_r	20.4 ... 30 V DC bus powered via Termination Board
Rated current	I_r	30 mA at 24 V, 20 mA output
Power dissipation		0.6 W at 24 V
Input		
Connection side		field side
Connection		SL2: 7a(+), 5a(-), 5b(+), 7b(-)
RTD		2-, 3- or 4-wire Pt100 acc. to DIN 43760
Measuring current		max. 0.4 mA
Measurement range		-200 ... 850 °C (-328 ... 1562 °F)
Span limits		40 ... 850 °C (104 ... 1562 °F)
Zero suppression		± 500 % of span
Potentiometer		3-wire
Measurement range		100 ... 300 Ω or 0.3 ... 100 kΩ with external shunt
Line fault detection		sensor burnout, upscale or downscale (selectable) (not on potentiometer and 4-wire RTD)
Output		
Connection side		control side
Connection		SL1: 8a(+), 7a(-)
Load		0 ... 650 Ω
Output signal		4 ... 20 mA or 1 ... 5 V (on 250 Ω, 0.1 % internal shunt) Output signal is linear with temperature for Pt100.
Ripple		10 mV _{rms} (at load 250 Ω)
Transfer characteristics		
Accuracy		< ± 0.1 % of full-scale value (current output)
Influence of temperature		< ± 0.01 %/K on zero and span
Influence of load		< ± 0.1 % of full-scale value from 0 ... 650 Ω
Rise time/fall time		typ. 150 ms
Linearity		< ± 0.1 % of full-scale value (terminal based °C or °F input to mA out for Pt100)
Galvanic isolation		
Output/power supply		none
Indicators/settings		
Display elements		LED
Control elements		DIP-switch potentiometer
Configuration		via DIP switches via potentiometer
Labeling		space for labeling at the front
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Conformity		
Electromagnetic compatibility		NE 21:2006 For further information see system description.
Degree of protection		IEC 60529
Ambient conditions		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
Relative humidity		5 ... 90 %, non-condensing up to 35 °C (95 °F)
Mechanical specifications		
Degree of protection		IP20
Mass		approx. 140 g
Dimensions		18 x 106 x 128 mm (0.7 x 4.2 x 5 inch)
Mounting		on Termination Board
Coding		pin 1 and 2 trimmed For further information see system description.
Data for application in connection with hazardous areas		
EU-Type Examination Certificate		CESI 02 ATEX 086
Marking		 II (1)G [Ex ia Ga] IIC  II (1)D [Ex ia Da] IIIC
Input		Ex ia, Ex iaD
Voltage	U_o	13.2 V
Current	I_o	20 mA
Power	P_o	66 mW

Release date 2017-08-09 14:50 Date of issue 2017-08-10 12:1442_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Supply		
Maximum safe voltage	U_m	250 V AC (Attention! U_m is no rated voltage.)
Certificate		PF 11 CERT 2109 X
Marking		II 3G Ex nA IIC T4 Gc [device in zone 2]
Galvanic isolation		
Input/Output		safe electrical isolation acc. to EN 60079-11: 2007, voltage peak value 375 V
Input/power supply		safe electrical isolation acc. to EN 60079-11: 2007, voltage peak value 375 V
Directive conformity		
Directive 2014/34/EU		EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-15:2010
International approvals		
CSA approval		
Control drawing		366-005CS-12B (cCSAus)
IECEX approval		IECEX TUN 04.0012
Approved for		[Ex ia] IIC
General information		
Supplementary information		Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .

Configuration

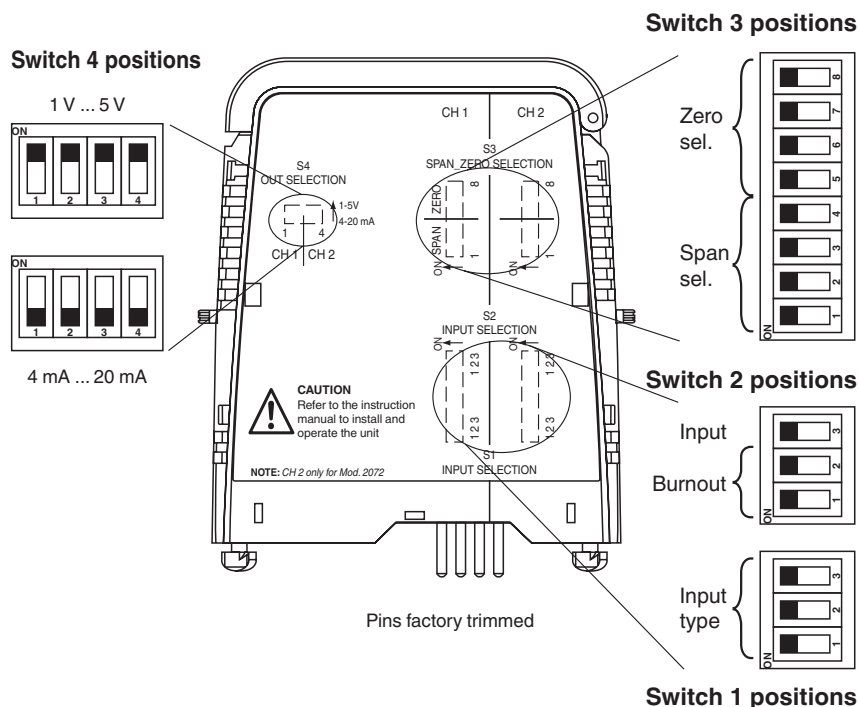

The inputs can be configured as:

- RTD (2-, 3- or 4-wire) or POT
- Input zero and span value
- Burnout detection upscale (UP) or downscale (DOWN) (only for 2-, 3-wire)



For Information for input range setting and the tables with the values for zero and span of the thermocouples refer to operating instructions.

The outputs can be configured as:

- Current output 4 mA ... 20 mA
- Voltage output 1 V ... 5 V

Input	S1-1	S1-2	S1-3	S2-3
RTD 2 W	ON	ON	ON	ON
RTD 3 W	ON	ON	ON	ON
RTD 4 W	ON	OFF	OFF	ON
POT	OFF	OFF	OFF	OFF

Burnout	S2-1	S2-2
UP	ON	OFF
DOWN	OFF	ON
POT Input	OFF	OFF

Output	CH 1		CH 2 (only for HiD2072)	
	S4-1	S4-2	S4-3	S4-4
4 mA ... 20 mA	OFF	OFF	OFF	OFF
1 V ... 5 V	ON	ON	ON	ON

Release date 2017-08-09 14:50 Date of issue 2017-08-10 12:14:42_eng.xml



Channel 2 only for HiD2072.

Configure the device in the following way:

- Push the red Quick Lok Bars on each side of the device in the upper position.
- Remove the device from Termination Board.
- Set the DIP switches according to the figure.



*The pins for this device are trimmed to polarize it according to its safety parameter. Do not change!
For further information see system description.*