stay connected

# **IMPACT67 COMPACT MODULE, PLASTIC**

Ethernet/IP, 16 dig In


Digital inputs DI16

Connection cables are in the online shop under "Connection Technology". Housing fully potted.

## **Link to Product**

#### Illustration



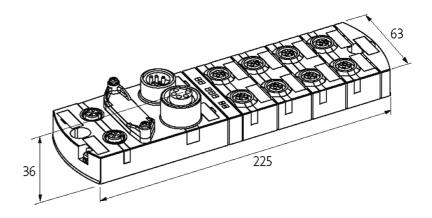

Product may differ from Image

### **Approvals**





### More Info

EtherNet/IP

## Input



sta	vcc	nn	Pr	ten
SLU	VCC	,,,,,	CC	LCU

Sensor supply US	24 V DC (EN 61131-2), max. 200 mA (M12 female), short-circuit and overload protected	
Туре	for 3-wire sensors or mechanical switches, PNP	
Connections		
Fieldbus	Ethernet 10/100 Mbit/s; M12, D-coded	
Sensor-system/actuator supply	7/8", 5-pole, 2 × max. 9 A	
I/O ports	M12, 5-pole, A-coded	
General data		
Protection	IP67	
Mounting method	2 hole screw mounting, compatible with I/O modules of MVK model range	
Temperature range	-25+55 °C (storage temperature -25+70 °C)	
Dimensions $H \times W \times D$	39×63×225 mm	
EtherNet/IP		
Addressing	DHCP, BOOTP or IP address by rotary switch	
Diagnostic		
Communication status	via LED	
Diagnostic via LED	per module and channel	
Diagnostic via BUS	per module	
Monitoring - under voltage	yes	
Monitoring - no voltage	yes	
Short-circuit and overload	yes	
Commercial data		
country of origin	DE	
customs tariff number	85389099	
EAN	4048879051958	
eClass	27242604	
Packaging unit	1	