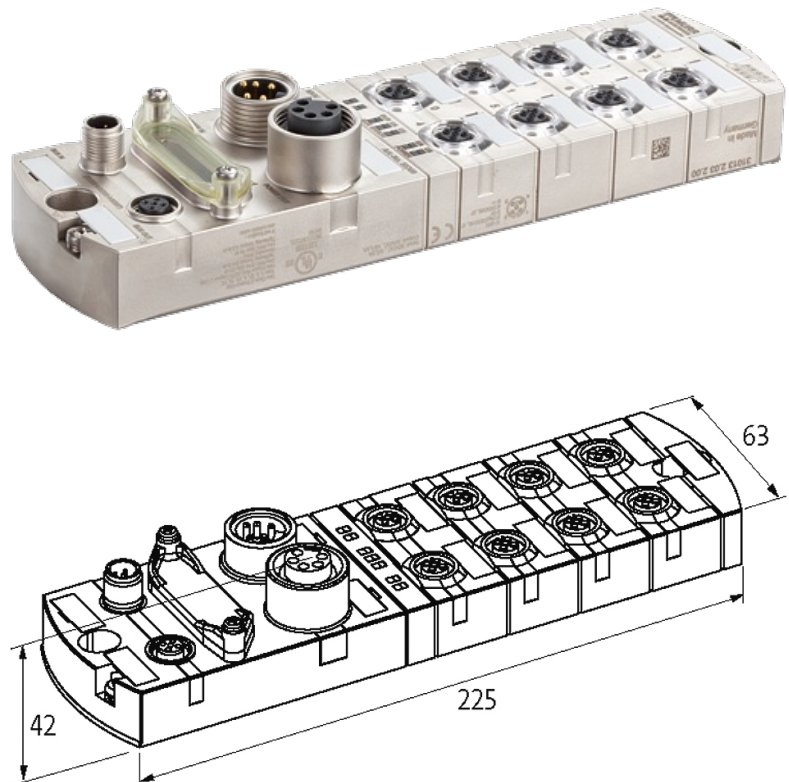


**MVK I/O COMPACT MODULE, METAL**

Profibus DP, 16 dig In / Diag.

Digital inputs  
DI8 + 8 × Diagnostic/DI

Connection cables are in the online shop under "Connection Technology". Housing fully potted.

[Link to Product](#)**Illustration**

Product may differ from Image

**Approvals****More Info**



### Input

Sensor supply US	24 V DC (EN 61131-2), max. 200 mA (M12 female), short-circuit and overload protected
Type	for 3-wire sensors or mechanical switches, PNP

### Connections

Fieldbus	PROFIBUS 12 Mbit/s; M12, B-coded
Sensor-system/actuator supply	7/8", 5-pole, 2 × max. 9 A
I/O ports	M12, 5-pole, A-coded

### PROFIBUS

Addressing	Rotary switch 1...99
------------	----------------------

### General data

Protection	IP67
Mounting method	2-hole screw mounting
Dimensions H × W × D	42×63×225 mm
Temperature range	-25...+55 °C (storage temperature -25...+70 °C)

### Parameterization

PIN 4	Input
PIN 2	Input/Diagnostic

### Diagnostic

Communication status	via LED
Diagnostic via LED	per module and channel
Diagnostic via BUS	per module and channel
Monitoring - under voltage	yes
Monitoring - no voltage	yes
Short-circuit and overload	yes
Actuator warning	per channel via LED and BUS
Cable break	per port

### Commercial data

country of origin	DE
customs tariff number	85389099
EAN	4048879051484
eClass	27242604
Packaging unit	1