

# Active Distributor ASi, IP67, M12, 4I/4O



2 x connectors for profile cable

Periphery connection via

1 x M12 cable socket, straight, 8 poles +  
3 x M12 cable sockets, straight, 5 poles

For SEW MOVIMOT with binary control

Suitable for option with plug connector AVR1



(figure similar)



Figure	Type	Number of Drives	Inputs digital	Outputs digital	Input voltage (sensor supply) (1)	Output voltage (actuator supply) (2)	ASi connection (3)	Connection (4)	ASi address (5)	Special function	Art. no.
	IP67, depth 35 mm	1	4	4 x electronic	I1 out of AUX, I2 ... I4 out of ASi	out of AUX	ASi profile cable	1 x M12 cable socket, straight, 8 poles + 3 x M12 cable socket, straight, 5 poles	1 single address	for connecting SEW MOVIMOT to ASi	<b>BWU3631</b>
	IP67, depth 35 mm	1	4	4 x electronic	I1 out of AUX, I2 ... I4 out of ASi	out of AUX	ASi profile cable	1 x M12 cable socket, straight, 8 poles + 3 x M12 cable socket, straight, 5 poles	1 AB address	for connecting SEW MOVIMOT to ASi	<b>BWU3782</b>

(1) **Input voltage (sensor supply):** inputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, inputs shall not be connected to earth or to external potential.

(2) **Output voltage (actuator supply):** outputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, outputs shall not be connected to earth or to external potential

(3) **ASi connection:** the connection to ASi as well to AUX (auxiliary 24 V power) is made via yellow resp. black ASi profile cable with piercing technology or via M12 socket (in IP20 via clamps).

(4) **Connection:** further connection options are available on request.

M12 cable socket, angled	M12 cable socket, straight	M8 cable socket, straight	round cable / connecting wires	Push in terminals
PUR line: oil resistant				


(5) **ASi address:** 1 AB address (max. 62 AB addresses/ASi network), 2 AB addresses (max. 31 modules with 2 AB addresses), Single addresses (max. 31 Single addresses/ASi network), mixed use allowed.  
For modules with two ASi nodes the second ASi node is turned off as long as the first ASi node is addressed to address "0".  
Upon request, ASi nodes are available with specific ASi address profiles.

Article No.	BWU3631		BWU3782	
<b>General data</b>				
Device type	input/output			
<b>Connection</b>				
ASi/AUX connection	profile cable and piercing			
Periphery connection	1 x M12 cable socket, straight, 8 poles + 3 x M12 cable sockets, straight, 5 poles			
M12 wiring <sup>(1)</sup>	single wiring (I2 ... I4)			
Length of connector cable	1 m (I1, O1 ... O4), 0,3 m (I2 ... I4)		2 m (I1, O1 ... O4), 0,3 m (I2 ... I4)	
	max. allowed tensile strain 10 N			
<b>ASi</b>				
Profile	S-7.0.E (ID1=F default)		S-7.A.7 (ID1=7 fixed)	
Address	1 single address		1 AB address	
Required Master profile	≥M0		≥M3	
As of ASi specification	2.0		2.1	
Operating voltage	30 V <sub>DC</sub> (18 ... 31.6 V)			
Max. current consumption	165 mA			
Max. current consumption without sensor/ actuator supply	45 mA			
<b>AUX</b>				
Operating voltage	24 V <sub>DC</sub> (18 ... 30 V)			
Max. current consumption	3 A			
<b>Input</b>				
Number	4			
Power supply	I1 out of AUX, I2 ... I4 out of ASi			
Power supply of attached sensors	up to +40 °C	I2 ... I4 out of ASi: 120 mA <sup>(2)</sup>		
	at +55 °C	I2 ... I4 out of ASi: 80 mA <sup>(2)</sup>		
	at +60 °C	I2 ... I4 out of ASi: 60 mA <sup>(2)</sup>		
Switching threshold	U < 5 V (low) U > 15 V (high)			
<b>Output</b>				
Number	4			
Power supply	out of AUX			
Output	short-circuit and overload protected according to EN 61131-2			
Max. output current	up to +40 °C	1 A per output, $\sum (\text{Out}) \leq 3 \text{ A}^{(3)}$		
	at +55 °C	1 A per output, $\sum (\text{Out}) \leq 2 \text{ A}^{(3)}$		
	at +60 °C	1 A per output, $\sum (\text{Out}) \leq 1,5 \text{ A}^{(3)}$		
Safe disconnection of output voltage	yes up to PLe			
<b>Display</b>				
LED ASi (red/green)	green: ASi voltage on, ASi node online red: ASi voltage on, but ASi node offline yellow/red flashing: address 0 red/green flashing: peripheral fault <sup>(4)</sup> off: no ASi voltage			
LED AUX (green)	on: 24 V <sub>DC</sub> AUX off: no 24 V <sub>DC</sub> AUX			
LED I1 ... In (yellow)	state of inputs I1 ... I4			
LED O1 ... On (yellow)	state of outputs O1 ... O4			


Article No.	BWU3631	BWU3782
<b>Environment</b>		
Applied standards	EN ISO 13849-1 PLe EN ISO 13849-2	
	EN 62026-2 EN 61000-6-2 EN 61000-6-3 EN 61131-2 EN 60529	
Can be used in passively safe paths up to SIL3/PLe	yes <sup>(6)</sup>	
Operating altitude	max. 2000 m	
Ambient temperature	-30 °C ... +60 °C <sup>(2)(3)(5)</sup>	
Storage temperature	-25 °C ... +85 °C	
Housing	plastic, screw mounting, suitable for cable ducts (installation depth ≥35mm)	
Pollution Degree	2	
Protection category	IP67	
Tolerable loading referring to humidity	according to EN 61131-2	
Maximum tolerable shock and vibration stress	≤15g, T≤11 ms 10 ... 55 Hz, 0,5 mm amplitude	
Insulation voltage	≥500 V	
Weight	100 g	
Dimensions (W / H / D) in mm	60 / 45 / 35	

(1) **M12 wiring:** either as a single-wiring, Y-wiring or mixed-wiring.


**Single-wiring**

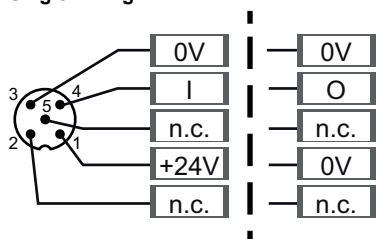


**Y-wiring**

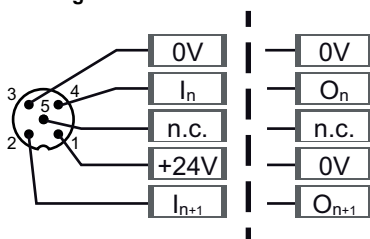


**Mixed-wiring**



(2)

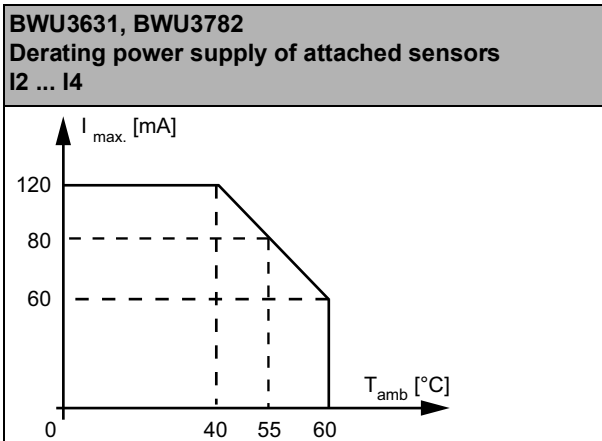

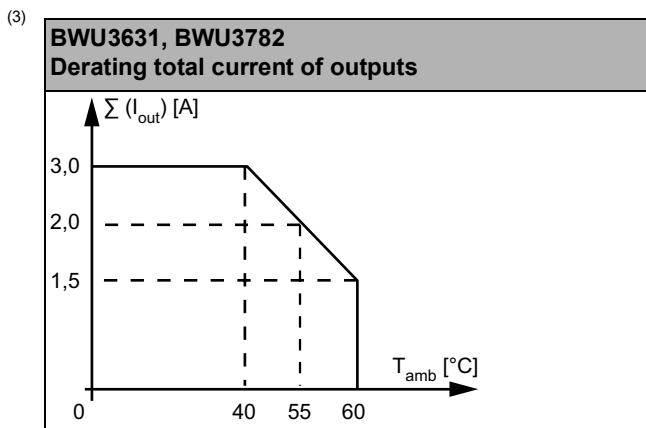

(4) see table "Peripheral fault indication"

(6) The module is suitable for use in passively safe paths because an exclusion of errors can be assumed for the connection of the two potentials, ASi and AUX.

(5) Down to -25 °C with flexibly mounted cable, -30 °C only with fixed mounted cable.

Article no.	Peripheral fault indication		
	Overload sensor supply	Output short circuited	AUX voltage missing
BWU3631	•	-	•
BWU3782	•	-	•

UL-specifications (UL61010) BWU3631, BWU3782	
External protection	An isolated source with a secondary open circuit voltage of $\leq 30 V_{DC}$ with a 3 A maximum over current protection. Over current protection is not required when a Class 2 source is employed.
In general	UL mark does not provide UL certification for any functional safety rating or aspects of the above devices.


Programming	Parameter bit			
	D0	D1	D2	D3
	input			
BWU3631 / BWU3782	I1	I2	I3	I4
	output			
BWU3631 / BWU3782	O1	O2	O3	O4
	parameter bit			
	P0	P1	P2	P3
BWU3631 / BWU3782	0= off / 1= on (Watchdog)	0= off / 1= on (peripheral fault, if AUX missing)	0= on / 1= off (synchronous I/O mode)	not used

### Pin assignment

Signal name	Explanation
I <sub>x</sub>	digital input x
O <sub>x</sub>	digital output x
24V <sub>ext out</sub>	power supply, out of external voltage, positive pole (AUX, actuator supply)
0V <sub>ext out</sub>	power supply, out of external voltage, negative pole (AUX, actuator supply)
24V <sub>out of ASi</sub>	power supply, out of ASi, positive pole (sensor supply)
0V <sub>out of ASi</sub>	power supply, out of ASi, negative pole (sensor supply)
ASi +, ASi -	connection to ASi bus
n.c. (not connected)	not connected

Connections:										
Article no.	M12, 8 poles	Pin1 (WH)	Pin2 (BN)	Pin3 (GN)	Pin4 (YE)	Pin5 (GY)	Pin6 (PK)	Pin7 (BU)	Pin8 (RD)	
BWU3631	X1	I1 (K1b)	O1 (24 V)	O2 (R)	O3 (L)	O4 (f1/f2)	n.c (K1a)	0 V ext out	n.c.	
	M12, 5 poles	Pin1 (BN)	Pin2 (WH)	Pin3 (BU)	Pin4 (BK)	Pin5 (--)				
	X2	24 V out of ASi	n.c.	0 V out of ASi	I4	n.c.		-		
	X3	24 V out of ASi	n.c.	0 V out of ASi	I3	n.c.		-		
	X4	24 V out of ASi	n.c.	0 V out of ASi	I2	n.c.		-		
Article no.	M12, 8 poles	Pin1 (WH)	Pin2 (BN)	Pin3 (GN)	Pin4 (YE)	Pin5 (GY)	Pin6 (PK)	Pin7 (BU)	Pin8 (RD)	
BWU3782	X1	I1 (K1b)	O4 (24 V)	O1 (R)	O2 (L)	O3 (f1/f2)	n.c (K1a)	0 V ext out	n.c.	
	M12, 5 poles	Pin1 (BN)	Pin2 (WH)	Pin3 (BU)	Pin4 (BK)	Pin5 (--)				
	X2	24 V out of ASi	n.c.	0 V out of ASi	I4	n.c.		-		
	X3	24 V out of ASi	n.c.	0 V out of ASi	I3	n.c.		-		
	X4	24 V out of ASi	n.c.	0 V out of ASi	I2	n.c.		-		

### Line termination with sealing profile

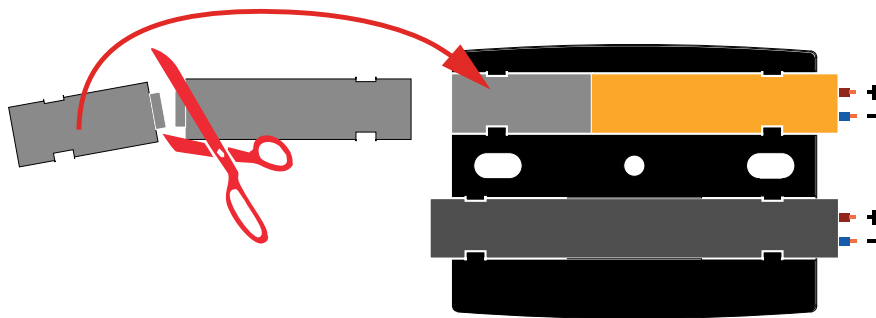

### Accessories:

- Sealing profile IP67 (IDC plug), 60 mm (art. no. BW3282)
- ASi-5/ASi-3 Address Programming Device (art. no. BW4708)
- ASi addressing cable with M12 connector, connecting cable for handheld ASi address programming devices for the addressing of active distributors (art. no. BW3304)
- ASi addressing cable with COMBICON connector, Connecting cable for ASi Master/Gateways for the addressing of active distributors (art. no. BW3305)