

MASI67 INSTALLATION TECHNOLOGY


Conversion from profile cable to 4xM12

MASI67 passive distribution box
2 × profile cable to 4 × M12 (female)

Connection cables are in the online shop under "Connection Technology". Housing fully potted.

[Link to Product](#)

Illustration

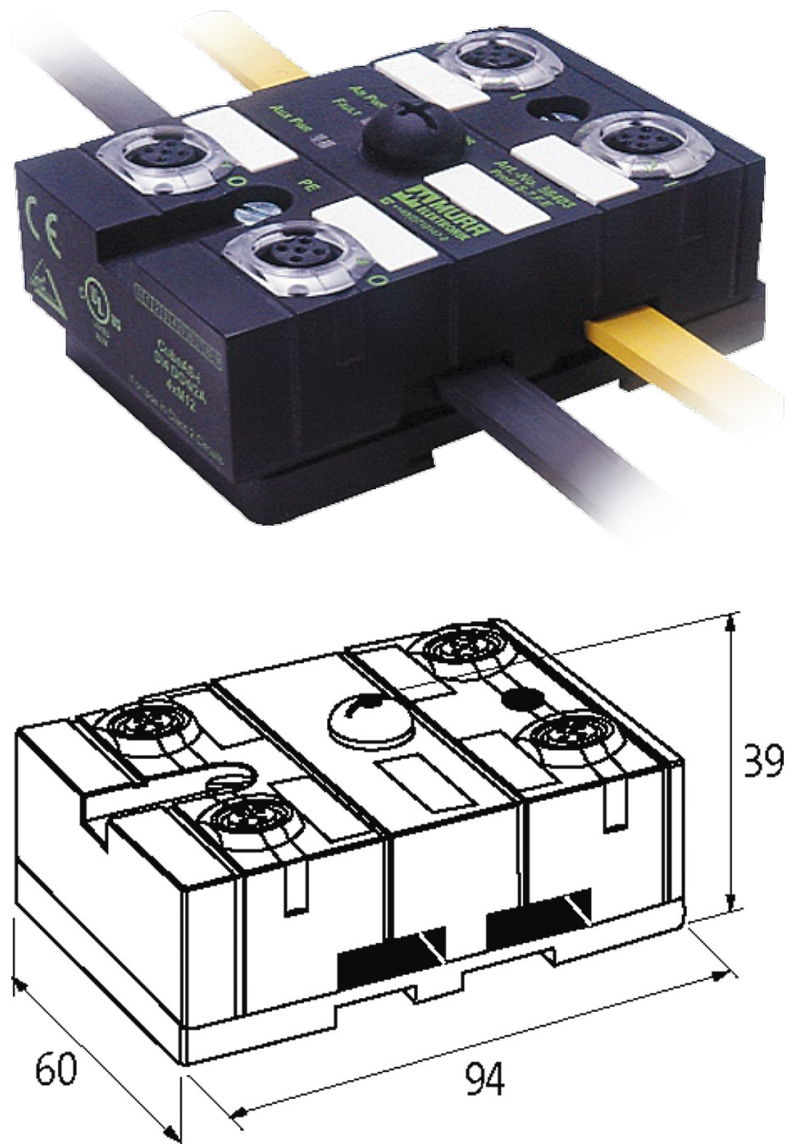

Product may differ from Image

Approvals

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/19

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com



System connection

Communication and module supply via AS-Interface system connection

Technical Data

Bus voltage (AS-Interface)	26.5...31.6 V DC
External supply	1 × aux power
Current via M12 port	max. 4 A
Total current	max. 8 A

General data

Protection	IP67
Mounting method	DIN-rail mountable (EN 60715) or screw fixing
Temperature range	-20...+60 °C (storage temperature -40...+80 °C)
Dimensions H × W × D	94×60×39 mm

Commercial data

country of origin	DE
customs tariff number	85369010
EAN	4048879049016
eClass	27279219
Packaging unit	1