

New standard ASi-5

Great data bandwidth, short cycle times

Compatible with ASi participants of all ASi generations

Counter input module configurable as:

- 4 x 2-channel input
- or
- 4 x 1-channel input

A/B inputs

Impulse counter

High protection category IP67



(Figure similar)



| Figure | Type | Housing | Inputs digital | Range of values | Counting rate | Input voltage (sensor supply) ⁽¹⁾ | ASi connection ⁽²⁾ | ASi address ⁽³⁾ | Article no. |
|--------|----------------------|---------|--------------------|-----------------------------------|-----------------|--|-------------------------------|----------------------------|----------------|
| | IP67, 4 x M12, ASi-5 | 4 x M12 | 4 x counter inputs | impulse: -32768 ... 32767 dec. | max. 250 kHz | out of ASi | ASi via M12 | 1 ASi-5 address | BWU4202 |

(1) **Input voltage (sensor supply):** Inputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, inputs shall not be connected to earth or to external potential.

(2) **ASi connection:** The connection to ASi as well to AUX (auxiliary 24 V power) is made via yellow resp. black ASi profile cable with piercing technology or via M12 socket (in IP20 via clamps).

(3) **ASi address:** AB addresses (max. 62 AB addresses/ASi network), 2 AB addresses (max. 31 modules with 2 AB addresses), Single addresses (max. 31 Single addresses/ASi network), ASi-5 address (max. 62 ASi-5 addresses/ASi network), mixed use allowed. Upon request, ASi-3 nodes are available with specific ASi node profiles. For modules with two ASi-3 nodes the 2nd ASi-3 node is turned off as long as the 1st ASi-3 node is addressed to address "0".

| Article No. | BWU4202 |
|--|--------------------------|
| General data | |
| Device type | counter input |
| Connection | |
| ASi connection | M12 ⁽¹⁾ |
| Periphery connection | M12 |
| Length of connector cable | I/O: 20 m ⁽²⁾ |
| ASi | |
| Address | 1 ASi-5 address |
| Required master profile | M5 |
| Since AS-i specification | 5 |
| Operating voltage | 30 V (18 ... 31.6 V) |
| Max. current consumption | 245 mA |
| Max. current consumption without sensor/ actuator supply | 45 mA |


| | | |
|--|---|-----------------------|
| Article No. | | BWU4202 |
| Input | | |
| Number | depending on configuration: 4 x 1-channel 4 x 2-channel | |
| Counting rate | max. 250 kHz | |
| Range of value | impulse: -32768 ... 32767 dec. (start value configurable) | |
| Power supply | out of ASi | |
| Sensor supply | short-circuit and overload protected according to EN 61131-2 | |
| Power supply of attached sensors | up to +40 °C | 200 mA ⁽³⁾ |
| | at +55 °C | 140 mA ⁽³⁾ |
| | at +70 °C | 120 mA ⁽³⁾ |
| Display | | |
| LED ASi (green) | on: ASi voltage on flashing: ASi voltage on, but peripheral fault ⁽⁴⁾ or address 0 off: no ASi voltage | |
| LED FAULT (red) | on: ASi address 0 or ASi participant offline flashing: peripheral fault ⁽⁴⁾ off: ASi participant online | |
| LED C1A ... CnA (yellow) | 1-channel mode on: signal at pulse counter input 1 ... 4 (Pin4) off: no signal | |
| | 2-channel mode with 4-times evaluation on: rising/falling edge at channel A of counter input 1 ... 4 (Pin2) | |
| | 2-channel mode without 4-times evaluation on: period recognized | |
| LED C1B ... CnB (yellow) | 1-channel mode on: status input 1 ... 4 (Pin2) active if bit USE CHx = 1 ⁽⁴⁾ off: status input 1 ... 4 (Pin2) not active if bit USE CHx = 1 ⁽⁴⁾ or bit USE CHx = 0 | |
| | 2-channel mode with 4-times evaluation on: rising/falling edge at channel B of counter input 1 ... 4 (Pin2) | |
| | 2-channel mode without 4-times evaluation no function | |
| Environment | | |
| Applied standards | EN 61000-6-2 EN 61000-6-3 EN 61131-2 EN 60529 | |
| Can be used in passively safe paths up to SIL3/PLe | yes ⁽⁵⁾ | |
| Operating altitude | max. 2000 m | |
| Ambient temperature | -30 °C ... +55 °C (up to max. +70 °C) ⁽³⁾ ⁽⁶⁾ | |
| Storage temperature | -25 °C ... +85 °C | |
| Housing | plastic, for screw mounting | |
| Pollution degree | 2 | |
| Protection category | IP67 | |
| Tolerable loading referring to humidity | acc. EN 61131-2 | |
| Max. tolerable shock load | 30g, 11 ms, acc. EN 61131-2 | |
| Max. tolerable vibration stress | 5 ... 8 Hz 50 mm _{pp} /8 ... 500 Hz 6g, acc. EN 61131-2 | |
| Insulation voltage | ≥ 500 V | |
| Weight | 200 g | |
| Dimensions (W / H / D) in mm | 45 / 80 / 38 (without substructure) | |

(1) **Line protection:**


If the module is supplied via a M12 connection with A or B coding, it may only be used with a current load of max. 4 A per pin in acc. with IEC 61076-2-101 and IEC 61076-2-109. A fused tap is recommended. There is no such limitation for modules supplied via piercing contacts.

Connection to ASi and AUX

via M12

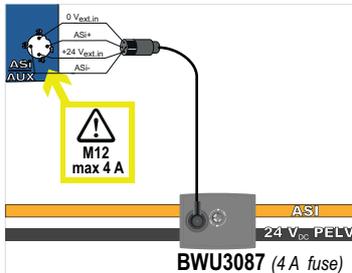


via piercing contacts

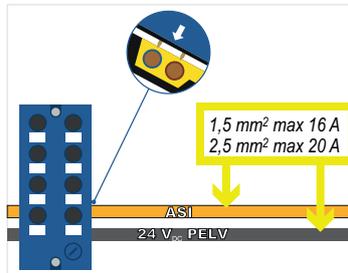

(2) Loop resistance $\leq 150 \Omega$

(3)

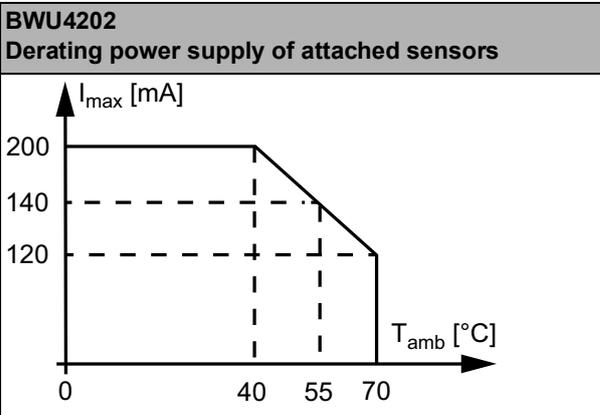


(4) See table "Peripheral fault indication"

(5) The module is suitable for use in passively safe paths as it has no connection to an AUX potential.

(6) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada

Dimensional drawings

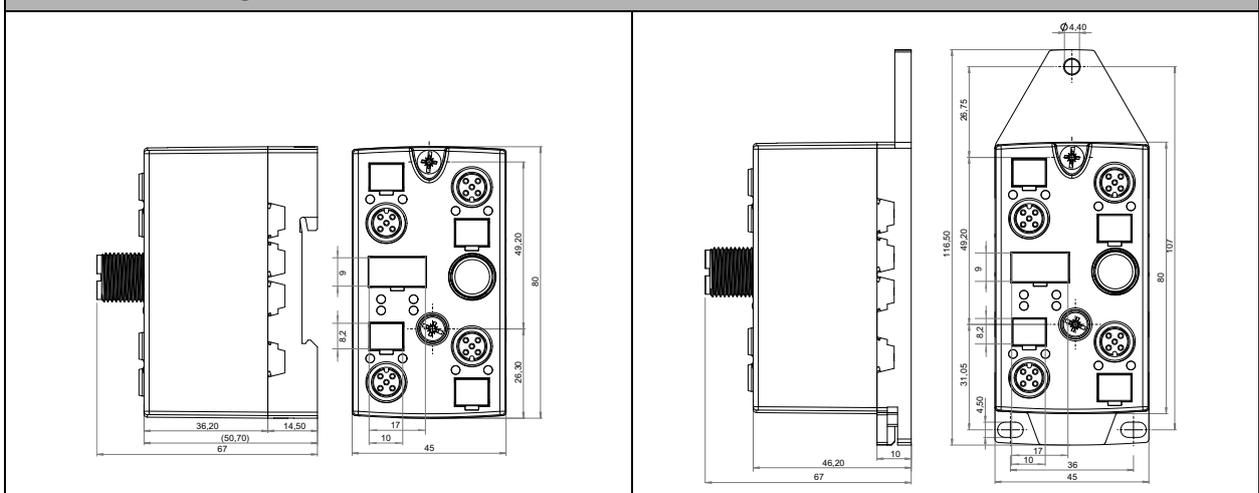

| Article no. | Peripheral fault indication | | |
|-------------|---|-----------------------|---|
| | counter overflow/underflow and RO Chx = 0 | input short circuited | status input (Pin2) in 1-channel mode is not active but bit USE CHx = 1 |
| BWU4202 | • | • | • |

| UL-specifications (UL508) BWU4202 | |
|--------------------------------------|---|
| External protection | An isolated source with a secondary open circuit voltage of $\leq 30 V_{DC}$ with a 3 A maximum over current protection. Over current protection is not required when a Class 2 source is employed. |
| In general | UL mark does not provide UL certification for any functional safety rating or aspects of the above devices. |

Programming (ASi Bit-setting)

| Article no. | Byte | Bit | | | | | | | |
|-------------|------------------------------------|------------------------------------|----|----|----|----|----|----|----|
| | | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| BWU4202 | | Input | | | | | | | |
| | 0 | Channel 1 counter value, low byte | | | | | | | |
| | 1 | Channel 1 counter value, high byte | | | | | | | |
| | 2 | Channel 2 counter value, low byte | | | | | | | |
| | 3 | Channel 2 counter value, high byte | | | | | | | |
| | 4 | Channel 3 counter value, low byte | | | | | | | |
| | 5 | Channel 3 counter value, high byte | | | | | | | |
| | 6 | Channel 4 counter value, low byte | | | | | | | |
| 7 | Channel 4 counter value, high byte | | | | | | | | |

| Article no. | Byte | Bit | | | | | | | |
|-------------|------|--|--------|---------|---------|--------|--------|--------|--------|
| | | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| | | Output | | | | | | | |
| BWU4202 | 0 | reserved ⁽¹⁾ | RO Ch1 | USE Ch1 | 4TE Ch1 | 2C Ch1 | CW Ch1 | SV Ch1 | RS Ch1 |
| | 1 | Prescaler Index Ch1 (integer) ⁽²⁾ | | | | | | | |
| | 2 | reserved ⁽¹⁾ | RO Ch2 | USE Ch2 | 4TE Ch2 | 2C Ch2 | CW Ch2 | SV Ch2 | RS Ch2 |
| | 3 | Prescaler Index Ch2 (integer) ⁽²⁾ | | | | | | | |
| | 4 | reserved ⁽¹⁾ | RO Ch3 | USE Ch3 | 4TE Ch3 | 2C Ch3 | CW Ch3 | SV Ch3 | RS Ch3 |
| | 5 | Prescaler Index Ch3 (integer) ⁽²⁾ | | | | | | | |
| | 6 | reserved ⁽¹⁾ | RO Ch4 | USE Ch4 | 4TE Ch4 | 2C Ch4 | CW Ch4 | SV Ch4 | RS Ch4 |
| | 7 | Prescaler Index Ch4 (integer) ⁽²⁾ | | | | | | | |

⁽¹⁾ Reserved bits have to be set to zero, otherwise an timer error could occur.

⁽²⁾ see table "Prescaler Index"

| Name | Explanation |
|---------|--|
| RO Chx | Rollover: 0 = Counter stops at highest/lowest value in case of overflow/underflow 1 = Counter counts with lowest/highest value in case of overflow/underflow |
| USE Chx | use Pin2 channel x 0 = in 1-channel mode (pulse counter) Pin2 is ignored 1 = in 1-channel mode (pulse counter) Pin2 is used as status input |
| 4TE Chx | 4-times evaluation: 0 = no 4-times evaluation 1 = in the 2-channel counting mode (bit 2C CHx =1) rising and falling edges on both channels are counted separately. |
| 2C Chx | counter mode channel x 0 = 1-channel input counter (pulse counter) 1 = 2-channel input counter (encoder) |
| CW Chx | direction of rotation channel x 1-channel input counter (bit 2C Chx = 0) 0 = counting upwards 1 = counting downwards 2-channel input counter (bit 2C Chx = 1) 0: CxB before CxA = counting upwards 1: CxA before CxB = counting downwards |
| SV Chx | start value channel x 0 = start value 0 (default = 0) 1 = start value 1 (default = -32768) |
| RS Chx | reset channel x RS changes from 0 to 1: counter starts with start value 0 resp. start value 1 RS changes from 1 to 0: counter stops and keeps last value |


| Article no. | Prescaler Index | | | | | | | | | | | | | | | |
|-------------|-----------------|----------|-----|--|--|--|-----|----|----|----|---|---|---|---|---|---|
| BWU4202 | Index (dec) | 255 | ... | | | | | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | Prescale value | reserved | | | | | 128 | 64 | 32 | 16 | 8 | 4 | 2 | 1 | | |

Pin assignment


| Signal name | Explanation |
|---------------------------|---|
| C x channel A, B | counter input x channel A, B (2-channel mode) |
| Status x | status input x (1-channel mode) |
| Pulse x+ | pulse counter input x, high rise (1-channel mode) |
| 24V _{out} of ASi | power supply, out of ASi, positive pole (sensor supply) |
| 0V _{out} of ASi | power supply, out of ASi, negative pole (sensor supply) |
| ASi+, ASi- | connection to ASi bus |
| Shield | shield |

| Connections | | | | | | | |
|-------------|--|---------|----------------------------|--------------|---------------------------|--------------|------|
| Article no. | M12 connection | Marking | Pin1 | Pin2 | Pin3 | Pin4 | Pin5 |
| BWU4042 | Configuration as: 4 x 2-channel input | | | | | | |
| | X1 | C1A/C1B | 24 V _{out of ASi} | C1 Channel B | 0 V _{out of ASi} | C1 Channel A | n.c. |
| | X2 | C2A/C2B | 24 V _{out of ASi} | C2 Channel B | 0 V _{out of ASi} | C2 Channel A | n.c. |
| | X3 | C3A/C3B | 24 V _{out of ASi} | C3 Channel B | 0 V _{out of ASi} | C3 Channel A | n.c. |
| | X4 | C4A/C4B | 24 V _{out of ASi} | C4 Channel B | 0 V _{out of ASi} | C4 Channel A | n.c. |
| | ASI | ASI | ASI+ | n.c. | ASI- | n.c. | - |
| | Configuration as: 4 x 1-channel input | | | | | | |
| | X1 | C1A/C1B | 24 V _{out of ASi} | Status 1 | 0 V _{out of ASi} | Pulse 1 + | n.c. |
| | X2 | C2A/C2B | 24 V _{out of ASi} | Status 2 | 0 V _{out of ASi} | Pulse 2 + | n.c. |
| | X3 | C3A/C3B | 24 V _{out of ASi} | Status 3 | 0 V _{out of ASi} | Pulse 3 + | n.c. |
| | X4 | C4A/C4B | 24 V _{out of ASi} | Status 4 | 0 V _{out of ASi} | Pulse 4 + | n.c. |
| | ASI | ASI | ASI+ | n.c. | ASI- | n.c. | - |

Mounting according to cable direction

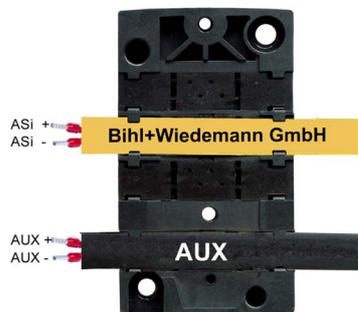


ordinary

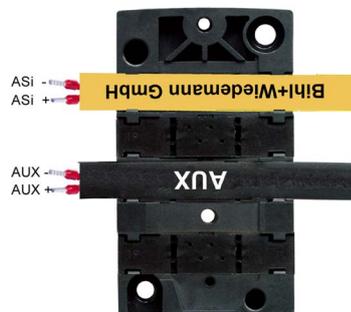

turned

Line termination with sealing profiles / as junction

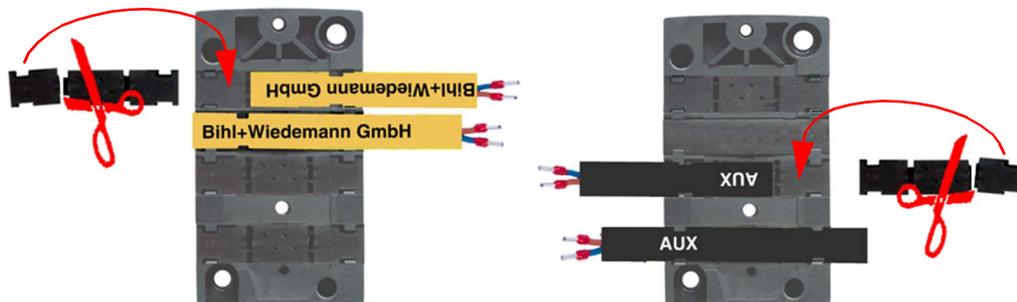

Accessories:

- Universal protection cap ASi-5/ASi-3 for M12 sockets, IP67 (art. no. BW4056)
- Passive Distributor ASi/AUX to 2 x M12 socket, internal protection via changeable 4 A slow-blow fuses (art. no. BWU3087)
- ASi-5/ASi-3 Address Programming Device (art. no. BW4708)
- It is recommended to use pre-assembled cables to connect the power source with the module.