

MASI68 DI4/0,19A DO4/2A 8xM12


Compact module

DI4 - 0.2 A DO4 - 2 A (C) 8xM12

Connection cables are in the online shop under "Connection Technology". Housing fully potted.

[Link to Product](#)

Illustration

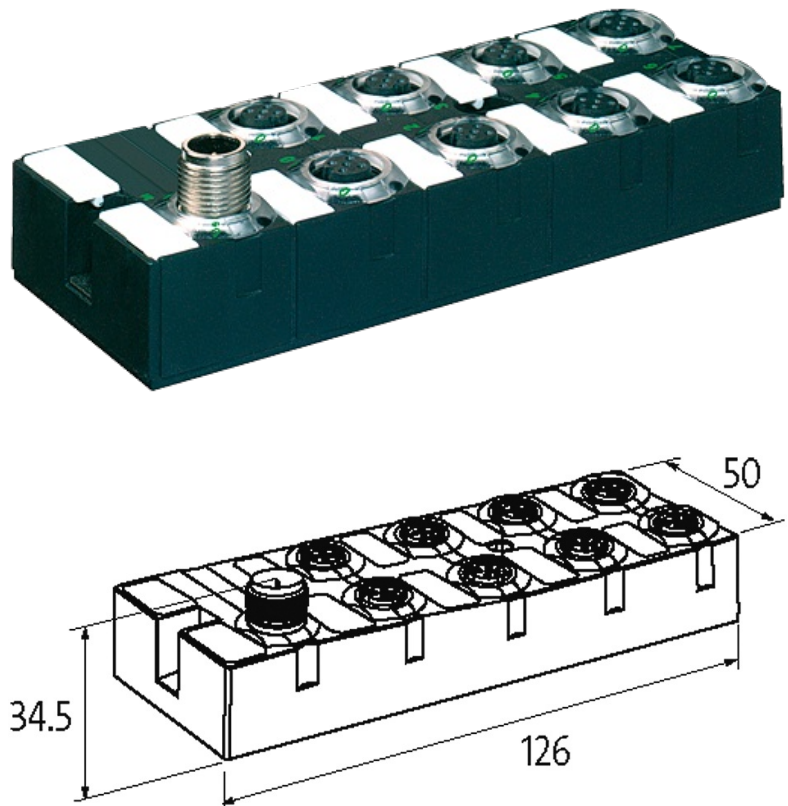

Product may differ from Image

Approvals



Input

Sensor supply US

max. 200 mA from AS-Interface (short-circuit and overload protected)

Type

for 3-wire sensors or mechanical switches, PNP

Connections

| | |
|------------------------------|---|
| Fieldbus | A-coded |
| I/O ports | M12, 5-pole |
| Technical Data | |
| Bus voltage (AS-Interface) | 26.5...31.6 V DC |
| ASI-Power 24 | yes |
| Total current | max. 250 mA |
| Addressing | via master or M12 connection and programming device |
| Address range | 1...31 |
| Profile (IO/ID/ID2 code) | S-7.0.7 |
| General data | |
| Protection | IP68 |
| Mounting method | screw fixing |
| Temperature range | -20...+60 °C (storage temperature -20...+70 °C) |
| Output | |
| Switching current per output | max. 2 A (short-circuit and overload protected) |
| Total current | max. 4 A |
| Diagnostic | |
| Communication status | via LED |
| Diagnostic via LED | per module |
| Monitoring - no voltage | yes |
| Commercial data | |
| country of origin | DE |
| customs tariff number | 85176200 |
| EAN | 4048879048798 |
| eClass | 27242604 |
| Packaging unit | 1 |