

MASI68 I/O EXTENSION MODULE

8 digital inputs


Expansion module

DI8 - 0.19 A (E) 4×M12 (AB) AUX

Connection cables are in the online shop under "Connection Technology". Housing fully potted.

[Link to Product](#)

Illustration

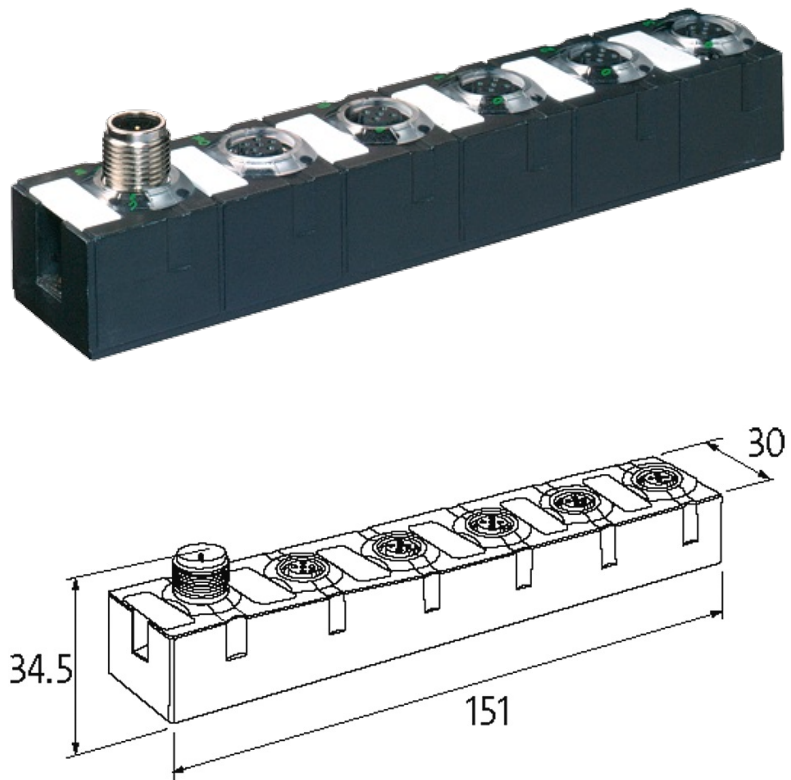

Product may differ from Image

Approvals



Input

Type	for 3-wire sensors or mechanical switches, PNP
Sensor supply US	max. 190 mA from AUX Power (short-circuit and overload protected)

Connections

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/19

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

Fieldbus	A-coded
I/O ports	M12, 4-pole
Technical Data	
Bus voltage (AS-Interface)	26.5...31.6 V DC
Addressing	via master or M12 connection and programming device
Profile (IO/ID/ID2 code)	2 × S-0.A.2
Address range	1...62 (2 × 1...31 A or B)
Total current	max. 250 mA
General data	
Protection	IP68
Mounting method	screw fixing
Temperature range	-20...+60 °C (storage temperature -20...+70 °C)
Dimensions H × W × D	151×30×34.5 mm
Diagnostic	
Communication status	via LED
Diagnostic via LED	per module
Monitoring - no voltage	yes
Commercial data	
country of origin	DE
customs tariff number	85176200
EAN	4048879332484
eClass	27242604
Packaging unit	1