


## AS-I AND 2X AUX. POWER DISTRIBUTER FOR MASI68

MASI68 passive distribution box  
2 × Aux. Power  
7/8"

Connection cables are in the online shop under "Connection Technology". Housing fully potted.

### [Link to Product](#)

#### Illustration

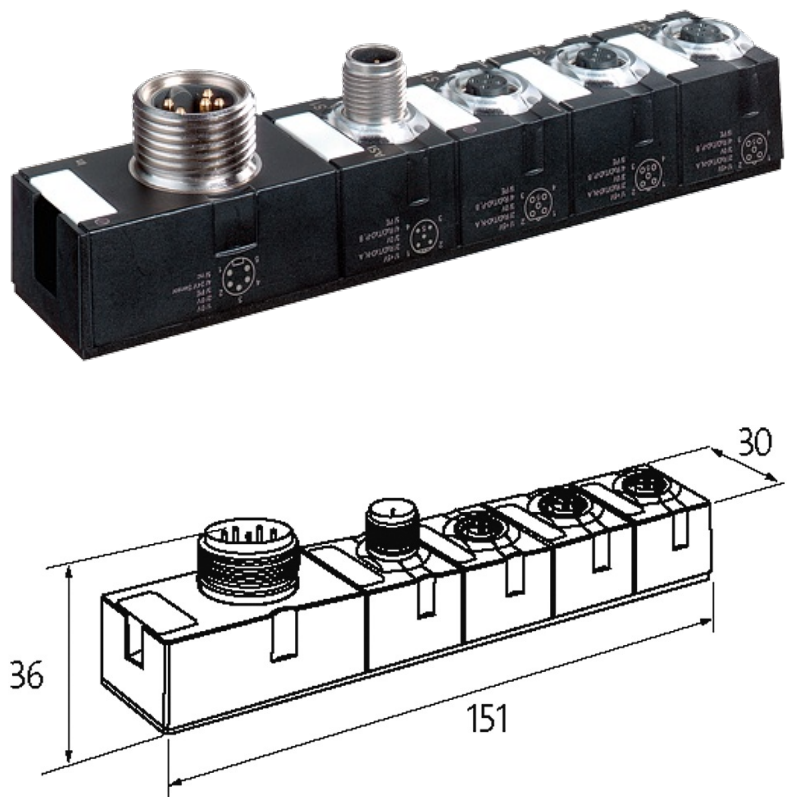

Product may differ from Image

#### Approvals



#### System connection

Communication and module supply via AS-Interface system connection

#### Connections

Fieldbus A-coded

I/O ports M12, 5-pole

### Technical Data

Bus voltage (AS-Interface)	26.5...31.6 V DC
External supply	24 V DC external (18...30.2 V DC) EN 61131-2, 2 × separately aux power
Current via M12 port	max. 4 A
Total current	max. 2 × 8 A

### General data

Protection	IP68
Mounting method	2-hole screw mounting
Temperature range	-20...+60 °C (storage temperature -20...+70 °C)
Dimensions H × W × D	151×30×34.5 mm

### Commercial data

country of origin	DE
customs tariff number	85176200
EAN	4048879373517
eClass	27279219
Packaging unit	1