

CUBE67 BUS NODES


DeviceNet

DeviceNet

Connection cables are in the online shop under "Connection Technology". Housing fully potted.


[Link to Product](#)

Illustration

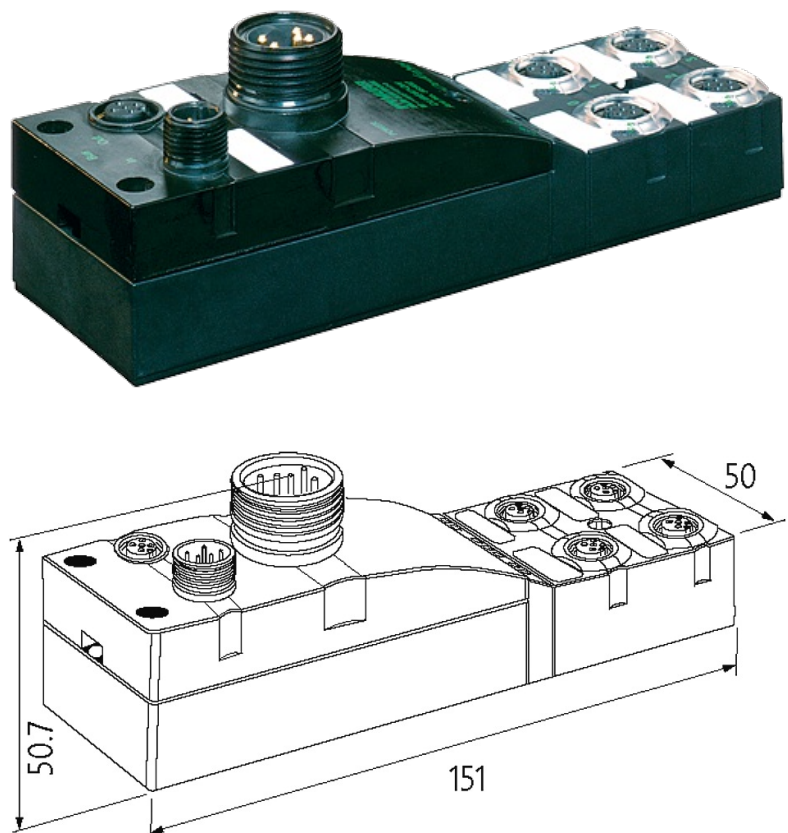

Product may differ from Image

Approvals



More Info

DeviceNet

Connections

Fieldbus	DN 125 kbit/s; 250 kbit/s; 500 kbit/s; M12, A-coded
Sensor-system/actuator supply	7/8", 5-pole, max. 9 A
Internal system connection	M12, 6 pole; max. 4 A
Module supply	
Operating voltage	24 V DC (EN 61131-2)
Current consumption	max. 70 mA
DeviceNet	
Addressing	Rotary switch 0...63
General data	
Protection	IP67
Mounting method	2-hole screw mounting
Temperature range	0...+55 °C (storage temperature -20...+75 °C)
Dimensions H x W x D	151x50x50.3 mm
Cube system	
Module capacity	max. 16
Diagnostic	
Communication status	via LED and BUS
Diagnostic via LED	per module and channel
Diagnostic via BUS	per module and channel
Monitoring - under voltage	yes
Monitoring - no voltage	yes
Short-circuit and overload	yes
Commercial data	
country of origin	DE
customs tariff number	85389099
EAN	4048879048682
eClass	27242608
Packaging unit	1