

## Features

- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- Voltage input 0 mV ...  $\pm 50$  mV
- Voltage output 0 mV ...  $\pm 50$  mV
- Selectable up/downscale sensor breakage detection

## Function

This isolated barrier is used for intrinsic safety applications.

It transfers low voltage signals from load cells, strain gauges, operational amplifiers, and inductive oscillation sensors located in hazardous areas to safe areas.


The input voltage of the terminals 4 and 5 is transferred to the terminals 7 and 8.

The input, output, and power supply are galvanically isolated from each other. Upscale or downscale lead breakage monitoring is selectable via switches located on the front panel of the device.


**Note:** This unit requires three minutes after power-up to reach the accuracy cited in the technical data.

## Assembly

Front view

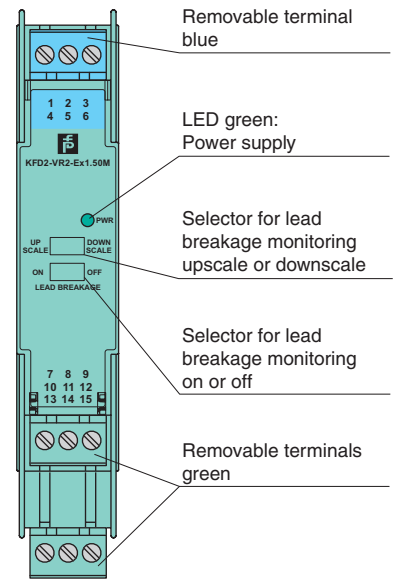

## Connection

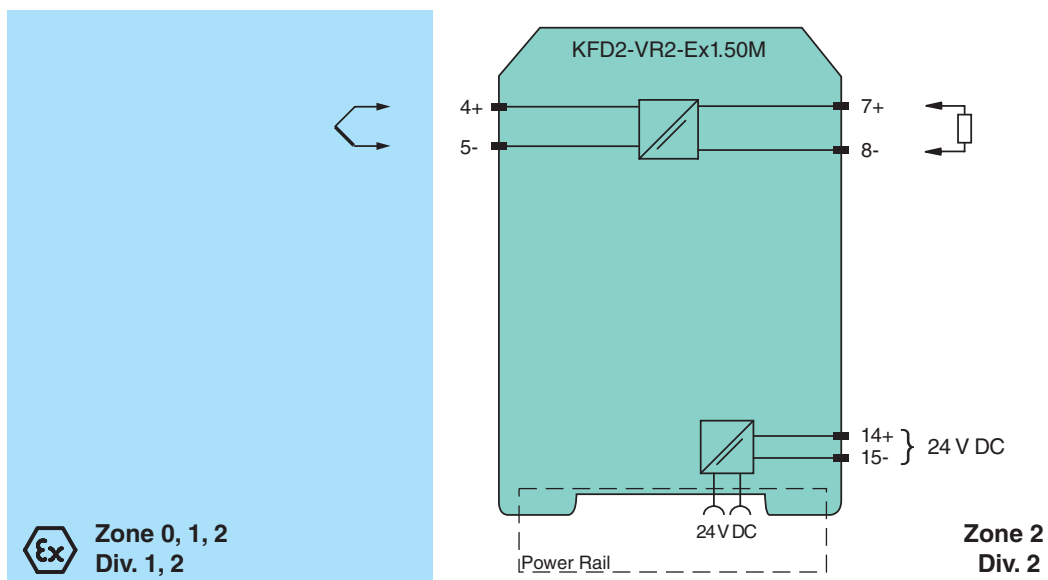

Release date 2019-01-25 09:38 Date of issue 2019-01-25 18:1951\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

**PEPPERL+FUCHS**

<b>General specifications</b>		
Signal type		Analog input
<b>Supply</b>		
Connection		Power Rail or terminals 14+, 15-
Rated voltage	$U_r$	19 ... 30 V DC
Ripple		within the supply tolerance
Rated current	$I_r$	≤ 11 mA
Power dissipation/power consumption		0.3 W max.
<b>Input</b>		
Connection side		field side
Connection		terminals 4+, 5-
Input resistance		≥ 20 MΩ
Transmission range		-50 ... 50 mV
Offset voltage/current		≤ 5 μV / ≤ 5 nA
Line fault detection		100 nA
<b>Output</b>		
Connection side		control side
Connection		terminals 7+, 8-
Load		Accuracy figures for infinite load impedance. Additional 0.03 % of span for a load resistance of 10 kΩ
Voltage		-50 ... 50 mV
Fault signal		sensor breakage: > +100 mV (upscale), < -100 mV (downscale)
Output resistance		≤ 3 Ω
<b>Transfer characteristics</b>		
Cut-off frequency		350 Hz (-3 dB)
<b>Deviation</b>		
After calibration		at 20 °C (68 °F): ± 3 μV up to ± 10 mV/± 0.03 % of the span up to +50 mV/± 0.05 % of the span up to -50 mV
Influence of ambient temperature		± 1 μV/K (typical ± 0.25 μV/K)
Absolute		< 0.25 K at 30 V voltage supply
Rise time		≤ 1 ms
<b>Galvanic isolation</b>		
Output/power supply		functional insulation, rated insulation voltage 50 V AC
<b>Indicators/settings</b>		
Display elements		LED
Control elements		DIP-switch
Configuration		via DIP switches
Labeling		space for labeling at the front
<b>Directive conformity</b>		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
<b>Conformity</b>		
Electromagnetic compatibility		
Degree of protection		NE 21
Protection against electrical shock		UL 61010-1
<b>Ambient conditions</b>		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
<b>Mechanical specifications</b>		
Degree of protection		
		IP20
Connection		
		screw terminals
Mass		
		approx. 125 g
Dimensions		
		20 x 119 x 115 mm (0.8 x 4.7 x 4.5 inch) , housing type B2
Mounting		
		on 35 mm DIN mounting rail acc. to EN 60715:2001
<b>Data for application in connection with hazardous areas</b>		
EU-Type Examination Certificate		
		BASEEFA 06 ATEX 0040
Marking		⊕ II (1)GD, I (M1) [Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I (-20 °C ≤ T <sub>amb</sub> ≤ 60 °C) , [circuit(s) in zone 0/1/2]
Voltage	$U_o$	5.5 V DC
Current	$I_o$	2.4 mA
Power	$P_o$	3.3 mW
Supply		
Maximum safe voltage	$U_m$	250 V (Attention! The rated voltage can be lower.)
Certificate		
		BASEEFA 09 ATEX 0219X
Marking		⊕ II 3G Ex nA II T4 Gc [device in zone 2]
Galvanic isolation		
Input/Output		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Input/power supply		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V

Release date 2019-01-25 09:38 Date of issue 2019-01-25 181951\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

<b>Directive conformity</b>	
Directive 2014/34/EU	EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-15:2010
<b>International approvals</b>	
UL approval	
Control drawing	116-0334 (cULus)
IECEX approval	
IECEX certificate	IECEX BAS 06.0011 IECEX BAS 09.0103X
IECEX marking	[Ex ia Ga] IIC , [Ex ia Da] IIIC , [Ex ia Ma] I Ex nA IIC T4 Gc
<b>General information</b>	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .
<b>Accessories</b>	
Optional accessories	- power feed module KFD2-EB2(.R4A.B)(.SP) - universal power rail UPR-03(-M)(-S) - profile rail K-DUCT-BU(-UPR-03)

Release date 2019-01-25 09:38 Date of issue 2019-01-25 18:051\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".