

Cube67 Valve-Interface, I/O Extension Module

DO22, Numatics Gen. 2000, Sub-D 25 pol., 0,5m

Expansion module

DO22 - Valve (E) 0.5 m


Multipole plug (0.5 A)

Numatics Generation 2000 (UL-Listed)

Connection cables are in the online shop under "Connection Technology". Housing fully potted.


[Link to Product](#)

Illustration

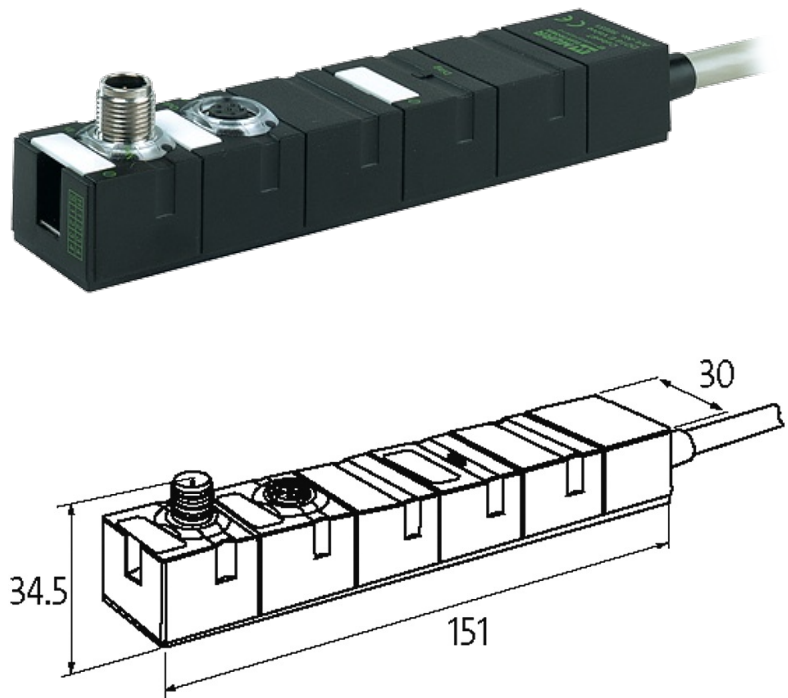

Product may differ from Image

Approvals



Internal communication

LED display

US: sensor supply and internal supply voltage (green: OK); UA: actuator supply (green: OK)

Current consumption

max. 50 mA

Connections

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/19

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

| | |
|-------------------------------|--|
| Fieldbus | via internal system connection |
| Sensor-system/actuator supply | via internal system connection (max. 2×4 A) |
| I/O ports | Numatics Generation 2000 (UL-Listed) |
| Cables | |
| No./diameter of wires | 36 × 0.14 mm ² |
| Material (jacket) | PVC |
| Cable Length | 0.5 m |
| General data | |
| Dimensions H × W × D | 150×30×34.5 mm |
| Output | |
| Actuator supply UA | 24 V DC (EN 61131-2), via system connection (max. 4 A) |
| Switching current per output | max. 0.5 A (short-circuit and overload protected) |
| Commercial data | |
| country of origin | DE |
| customs tariff number | 85444290 |
| EAN | 4048879353342 |
| eClass | 27242604 |
| Packaging unit | 1 |