

CUBE67 ACCESSORIES

System interface connector

M12

Male straight


Internal system connection

[Link to Product](#)

Illustration



Female

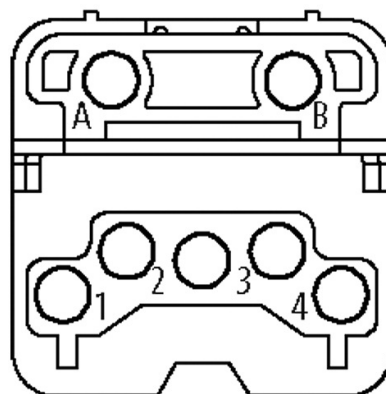

A: bus internal

B: bus internal

1: +24 V (US/4 A)

2: 0 V

3: 0 V

4: +24 V (UA/4 A)

Product may differ from Image

Technical Data

Operating voltage	24 V DC
Operating current	max. 4 A
Mating cycles	min. 500

General data

Protection	IP65
------------	------

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/19

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

Dimensions H x W x D	74x33.5x28.5 mm
Connection	Female M12, 6-pole, Han-Brid®, 6-pole
Temperature range	-40...+85 °C
Commercial data	
country of origin	DE
customs tariff number	85369010
EAN	4048879047906
eClass	27242692
Packaging unit	1