

## Features

- 2-channel isolated barrier
- 24 V DC supply (Power Rail)
- Dry contact or NAMUR inputs
- Input frequency 1 mHz ... 1 kHz
- Current output 0/4 mA ... 20 mA
- Relay contact and transistor output
- Start-up override
- Configurable by PACTware or keypad
- Line fault detection (LFD)

## Function

This isolated barrier is used for intrinsic safety applications. It analyzes 2 digital signals (NAMUR sensor/mechanical contact) from a hazardous area and functions as a rotation direction indicator, slip monitor, frequency monitor or synchronization monitor.

Each proximity sensor or switch controls a passive transistor output. The 2 relay outputs indicate if the input signal is above or below the trip value or the rotational direction.


The analog output can be programmed to be proportional to the input frequency or slip differential.

The unit is easily programmed by the use of a keypad located on the front of the unit or with the **PACTware™** configuration software.


Line fault detection of the field current is indicated by a red LED and through the collective error output via Power Rail.

For additional information, refer to the manual and [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com).

## Assembly

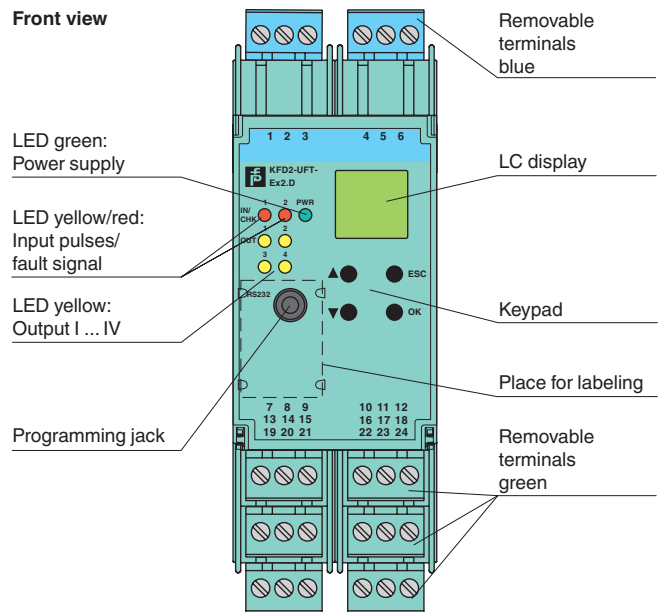

## Connection

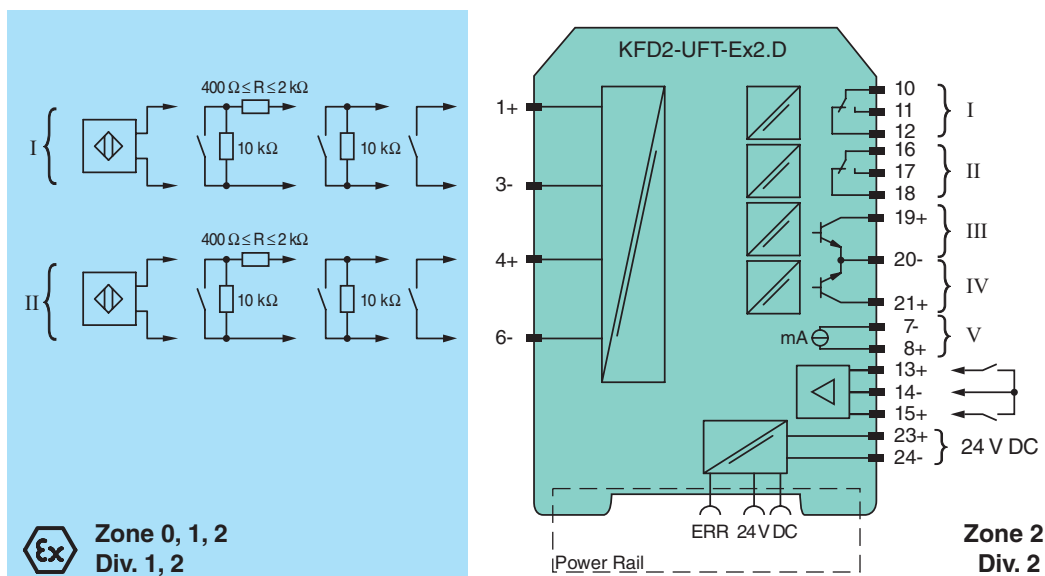

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

**PEPPERL+FUCHS**  
PROTECTING YOUR PROCESS

|  |  |
|--|--|
| <b>General specifications</b>                    |  |
| Signal type                                      | Digital Input  |
| <b>Supply</b>                                    |  |
| Connection                                       | terminals 23+, 24- or power feed module/Power Rail   |
| Rated voltage $U_r$                              | 20 ... 30 V DC   |
| Rated current $I_r$                              | approx. 130 mA   |
| Power dissipation                                | 2.2 W  |
| Power consumption                                | 2.5 W  |
| <b>Interface</b>                                 |  |
| Programming interface                            | programming socket   |
| <b>Input</b>                                     |  |
| Connection side                                  | field side   |
| Connection                                       | input I: terminals 1+, 3-<br>input II: terminals 4+, 6-<br>input III: terminals 13+, 14- (control input 1)<br>input IV: terminals 15+, 14- (control input 2)   |
| Input III, IV                                    |  |
| Active/Passive                                   | $I > 4 \text{ mA}$ (for min. 100 ms) / $I < 1.5 \text{ mA}$  |
| Open circuit voltage/short-circuit current       | 18 V / 5 mA  |
| <b>Output</b>                                    |  |
| Connection side                                  | control side   |
| Connection                                       | output I: terminals 10, 11, 12<br>output II: terminals 16, 17, 18<br>output III: terminals 19+, 20-<br>output IV: terminals 21+, 20-<br>output V: terminals 7-, 8+   |
| Output I, II                                     | signal, relay  |
| Contact loading                                  | 250 V AC / 2 A / $\cos \phi \geq 0.7$ ; 40 V DC / 2 A  |
| Mechanical life                                  | $5 \times 10^7$ switching cycles   |
| Energized/De-energized delay                     | approx. 20 ms / approx. 20 ms  |
| Output III and IV                                | signal, electronic output, passive   |
| Contact loading                                  | 40 V DC  |
| Signal level                                     | 1-signal: (external voltage) - 2.5 V max. for 10 mA or 3 V max. for 100 mA (100 mA, short-circuit proof) -2.5 V (50 mA, short-circuit/overload proof)<br>0-signal: switched off (off-state current $\leq 10 \mu\text{A}$ ) |
| Output V   | analog   |
| Current range                                    | 0 ... 20 mA or 4 ... 20 mA   |
| Open loop voltage                                | max. 24 V DC   |
| Load   | max. 650 $\Omega$  |
| Fault signal                                     | downscale $I \leq 3.6 \text{ mA}$ , upscale $I \geq 21.5 \text{ mA}$ (acc. NAMUR NE43)   |
| Collective error message                         | Power Rail   |
| <b>Transfer characteristics</b>                  |  |
| Input I and II                                   |  |
| Measurement range                                | 0.001 ... 1000 Hz  |
| Resolution                                       | slip monitoring: 1% frequency measurement: 0,1% of measured value; but $>0.001\text{Hz}$   |
| Accuracy   | slip monitoring: 1% frequency measurement: 0.5% of measured value; but $>0.001\text{Hz}$   |
| Measuring time                                   | frequency measurement: $< 100 \text{ ms}$  |
| Influence of ambient temperature                 | 0.003 %/K (30 ppm)   |
| Output I, II                                     |  |
| Response delay                                   | $\leq 200 \text{ ms}$  |
| Output V   |  |
| Resolution                                       | $< 10 \mu\text{A}$   |
| Accuracy   | $< 30 \mu\text{A}$   |
| Influence of ambient temperature                 | 0.005 %/K (50 ppm)   |
| <b>Galvanic isolation</b>                        |  |
| Input I, II/other circuits                       | reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>   |
| Input III, IV/power supply and collective error  | functional insulation acc. to IEC 62103, rated insulation voltage 50 V <sub>eff</sub>  |
| Output I, II/other circuits                      | reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>   |
| Mutual output I, II, III                         | reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>   |
| Mutual output I, II, IV                          | reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>   |
| Output III, IV/power supply and collective error | basic insulation according to IEC/EN 61010-1, rated insulation voltage 50 V <sub>eff</sub>   |
| Output III, IV/input III, IV                     | basic insulation according to IEC/EN 61010-1, rated insulation voltage 50 V <sub>eff</sub>   |
| Output III, IV/V                                 | basic insulation according to IEC/EN 61010-1, rated insulation voltage 50 V <sub>eff</sub>   |

Release date 2018-05-08 08:06 Date of issue 2018-05-08 23:1200\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

|  |                               |  |
|--|-------------------------------|--|
| Output V/power supply and collective error                     |                               | functional insulation acc. to IEC 62103, rated insulation voltage 50 V <sub>eff</sub>                              |
| Interface/power supply and collective error                    |                               | functional insulation acc. to IEC 62103, rated insulation voltage 50 V <sub>eff</sub>                              |
| Interface/output III, IV                                       |                               | basic insulation according to IEC/EN 61010-1, rated insulation voltage 50 V <sub>eff</sub>                         |
| <b>Indicators/settings</b>                                     |                               |  |
| Display elements   |                               | LEDs , display   |
| Control elements   |                               | Control panel  |
| Configuration  |                               | via operating buttons<br>via PACTware  |
| Labeling   |                               | space for labeling at the front  |
| <b>Directive conformity</b>                                    |                               |  |
| Electromagnetic compatibility                                  |                               |  |
| Directive 2014/30/EU   |                               | EN 61326-1:2013 (industrial locations)   |
| Low voltage  |                               |  |
| Directive 2014/35/EU   |                               | EN 61010-1:2010  |
| <b>Conformity</b>  |                               |  |
| Electromagnetic compatibility                                  |                               | NE 21:2006   |
| Degree of protection   |                               | IEC 60529:2001   |
| Input  |                               | EN 60947-5-6:2000  |
| <b>Ambient conditions</b>                                      |                               |  |
| Ambient temperature  |                               | -20 ... 60 °C (-4 ... 140 °F)  |
| <b>Mechanical specifications</b>                               |                               |  |
| Degree of protection   |                               | IP20   |
| Connection   |                               | screw terminals  |
| Mass   |                               | 300 g  |
| Dimensions   |                               | 40 x 119 x 115 mm (1.6 x 4.7 x 4.5 inch) , housing type C3   |
| Mounting   |                               | on 35 mm DIN mounting rail acc. to EN 60715:2001   |
| <b>Data for application in connection with hazardous areas</b> |                               |  |
| EU-Type Examination Certificate                                |                               | TÜV 99 ATEX 1471   |
| Marking  |                               | <div>Ex</div> II (1)G [Ex ia Ga] IIC<br><div>Ex</div> II (1)D [Ex ia Da] IIIC<br><div>Ex</div> I (M1) [Ex ia Ma] I |
| <b>Supply</b>  |                               |  |
| Maximum safe voltage   | U <sub>m</sub>                | 40 V DC (Attention! U <sub>m</sub> is no rated voltage.)   |
| <b>Input I and II</b>  |                               |  |
| Voltage  | U <sub>o</sub>                | 10.1 V   |
| Current  | I <sub>o</sub>                | 13.5 mA  |
| Power  | P <sub>o</sub>                | 34 mW (linear characteristic)  |
| <b>Input III and IV</b>  |                               |  |
| Maximum safe voltage   | U <sub>m</sub>                | 40 V (Attention! U <sub>m</sub> is no rated voltage.)  |
| <b>Output I, II</b>  |                               |  |
| Maximum safe voltage   | U <sub>m</sub>                | 253 V (Attention! The rated voltage can be lower.)   |
| Contact loading  |                               | 253 V AC/2 A/cos φ > 0.7; 40 V DC/2 A resistive load (TÜV 99 ATEX 1471)  |
| <b>Output III and IV</b>                                       |                               |  |
| Maximum safe voltage   | U <sub>m</sub> U <sub>m</sub> | 40 V DC (Attention! U <sub>m</sub> is no rated voltage.)   |
| <b>Output V</b>  |                               |  |
| Maximum safe voltage   | U <sub>m</sub> U <sub>m</sub> | 40 V DC (Attention! U <sub>m</sub> is no rated voltage.)   |
| <b>Interface</b>   |                               |  |
| Maximum safe voltage   | U <sub>m</sub>                | 40 V (Attention! U <sub>m</sub> is no rated voltage.)  |
| <b>Certificate</b>   |                               |  |
| Marking  |                               | <div>Ex</div> II 3G Ex nA nC IIC T4 Gc   |
| <b>Output I, II</b>  |                               |  |
| Contact loading  |                               | 50 V AC/2 A/cos φ > 0.7; 40 V DC/1 A resistive load  |
| <b>Galvanic isolation</b>                                      |                               |  |
| Input I, II/other circuits                                     |                               | safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V  |
| <b>Directive conformity</b>                                    |                               |  |
| Directive 2014/34/EU   |                               | EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-15:2010   |
| <b>International approvals</b>                                 |                               |  |
| <b>FM approval</b>   |                               |  |
| Control drawing  |                               | 16-538FM-12  |
| <b>UL approval</b>   |                               |  |
| IECEX approval   |                               | IECEX TUN 04.0007  |
| Approved for   |                               | [Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I  |

Release date 2018-05-08 08:06 Date of issue 2018-05-08 231200\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com



General information

Supplementary information

Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com).

Release date 2018-05-08 08:06 Date of issue 2018-05-08 231200\_eng.xml


## Function

The device processes two input frequencies up to a max. of 1 kHz. The following functions are provided by the device:

- Frequency measurement with freely adjustable trip value monitoring for high and low alarm as well as for frequency-current-conversion (0/4 mA ... 20 mA)
- Slip monitoring: The slip is calculated from the two input frequencies at channel I and II. If the freely parameterisable trip value is exceeded, the respective output switches.
- Rotation direction signalling: The rotation direction is evaluated from the two input signals with the same frequency and a phase shift of 90°. The corresponding outputs switch according to the direction of rotation.
- The frequency monitoring can be used in combination with rotation direction signalling or slip monitoring.
- Synchronisation monitor: The synchronisation monitor compares the pulse counts of the two inputs. If the measured difference in the pulses is greater than the programmed value the corresponding outputs are switching.

The two electronic outputs serve to repeat the input signals.

## Maximum Switching Power of Output Contacts

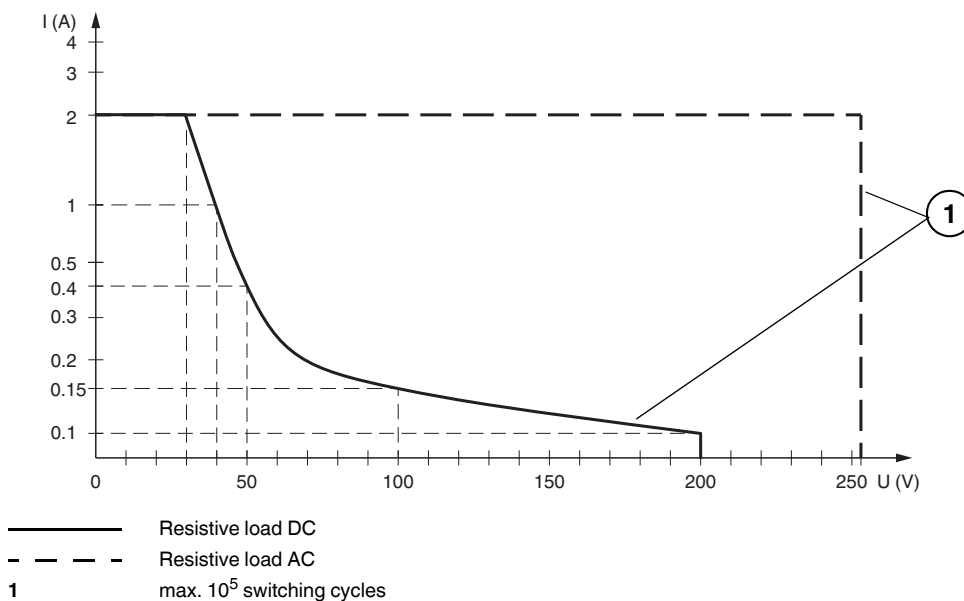

## Accessories

### Power feed module KFD2-EB2

The power feed module is used to supply the devices with 24 V DC via the Power Rail. The fuse-protected power feed module can supply up to 150 individual devices depending on the power consumption of the devices. A galvanically isolated mechanical contact uses the Power Rail to transmit collective error messages.

### Power Rail UPR-03

The Power Rail UPR-03 is a complete unit consisting of the electrical inset and an aluminium profile rail 35 mm x 15 mm. To make electrical contact, the devices are simply engaged.

### Profile Rail K-DUCT with Power Rail

The profile rail K-DUCT is an aluminum profile rail with Power Rail insert and two integral cable ducts for system and field cables. Due to this assembly no additional cable guides are necessary.



*Power Rail and Profile Rail must not be fed via the device terminals of the individual devices!*

### PACTware™

Device-specific drivers (DTM)

### Adapter K-ADP-USB

Programming adapter for parameterisation via the serial USB interface of a PC/Notebook