



Model Number

LGS17

Light grid

with fixed cable with 4-pin, M12 x 1 connector, and fixed cable with 8-pin, M12 x 1, connector


Features

- Automation light grid
- Optical resolution 17 mm
- Super-fast object detection, even with 3-way beam crossover
- Software-free adjustment of height monitoring
- Object identification using integrated object recognition
- IO-link interface for service and process data
- Optional temperature range to -30 °C



Product information

The LGS automation light grid series detects objects ranging in size from small to large. The very slender light grids have a modular design and come in different beam spacings and field heights. All signal evaluation takes place inside the unit. The lightweight systems can be integrated in their surroundings in a well-designed configuration, which means that machines and plants in temperature ranges between -30 °C ... +60 °C can be designed more compactly.


Dimensions

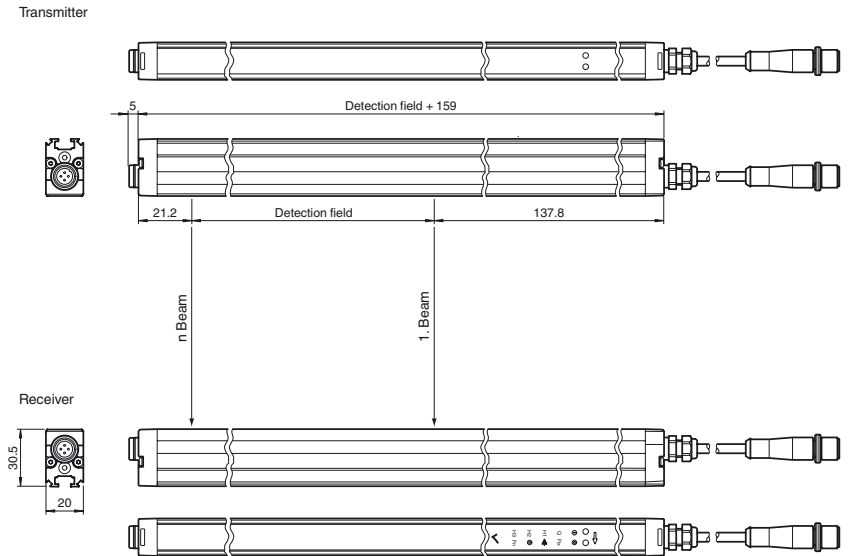


Electrical connection

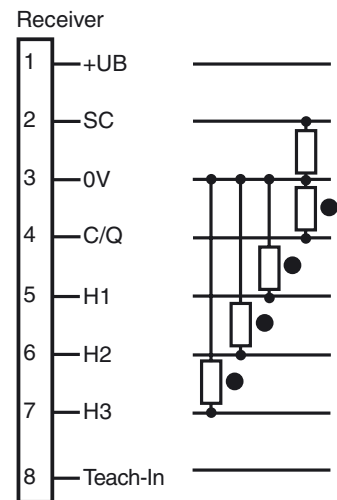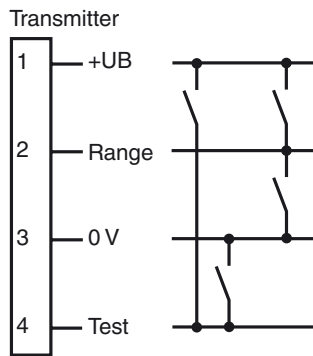

Pinout



Indicators/operating means



1	Menu button	yellow	7	Height checking 3	yellow
2	Operating indicator	green	8	Object floating	yellow
3	Status display	yellow	9	Crossing	yellow
4	Q object	yellow	10	Peripheral beam tolerance	yellow
5	Height checking 1	yellow	11	2nd level	yellow
6	Height checking 2	yellow	12	OK button	yellow

2nd level: Beam collimation, inverse mode, light-on/dark-on switching, reset factory setting, signal tracking

Release date: 2018-08-23 10:30 Date of issue: 2018-08-23 232505_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Technical data**General specifications**

Effective detection range	Standard : 0.3 ... 6 m Option /35: 0.5 ... 8 m
Threshold detection range	Standard : 7.5 m Option /35: 10 m
Light source	IREL
Light type	modulated infrared light , 850 nm
Field height	see Table 1, max. 3200 mm
Beam crossover	Factory setting: three beam crossing, deactivateable
Beam blanking	adjustable max. 2 fixed suppressible beam areas (blanking)
Beam spacing	16.67 mm
Number of beams	see Table 1, max. 193
Operating mode	Emitter: Emitter power adjustable in two ranges
Optical resolution	without beam crossover: 17 mm with beam crossover: 8.5 mm with in 25% and 75% of the range
Angle of divergence	10 °
Ambient light limit	> 50000 Lux (if external light source is outside the opening angle)

Functional safety related parameters

MTTF _d	25 a
Mission Time (T _M)	20 a
Diagnostic Coverage (DC)	60 %

Indicators/operating means

Operation indicator	Power on: LED green, statically lit , Undervoltage indicator: Green LED, pulsing (approx. 0.8 Hz) , short-circuit : LED green flashing (approx. 4 Hz)
Function indicator	Emitter: Yellow LED, illuminates at high emitting power, off at low emitting power Receiver: Yellow LED: illuminates when an object is detected flashes when falling short of the stability control (4 Hz) Error message: Yellow LED flashes (8 Hz) in emitter and receiver
Control elements	Receiver: 2 touch buttons for programming
Parameterization indicator	IO link communication: green LED goes out briefly (1 Hz)

Electrical specifications

Operating voltage	U _B	18 ... 30 V DC
Ripple		10 %
No-load supply current	I ₀	Emitter ≤: 50 mA Receiver: ≤ 150 mA (without outputs)
Time delay before availability	t _v	see Table 1, max. 3 s

Interface

Interface type	IO-Link
Protocol	IO-Link V1.0
Mode	COM 2 (38.4 kBaud)

Input

Test input	Emitter switch-off with +UB or 0 V at pin 4 (emitter)
Function input	Range input activation from 1.6 m (or 2 m in case of option /35) with +UB or 0 V on pin 2 (emitter) Teach-In input for programming on pin 8 (receiver)

Output

Pre-fault indication output	Stability Control (SC) 1 PNP, short-circuit protected, reverse polarity protected on pin 2 (receiver)
Switching type	Factory setting: dark on , Switchable to light-on mode
Signal output	Switch output (detection field C/Q) 1 push-pull (4 in 1) output, short-circuit protected, reverse polarity protected on pin 4 (receiver), Height monitoring (H1, H2, H3) 3 push-pull (4 in 1) outputs, short-circuit proof, reverse polarity protected on pin 5, pin 6, pin 7 (receiver)
Switching threshold	Factory setting: The signal tracking for the threshold value is deactivated, increasing the optical resolution by a maximum of 4 mm; switchable to active signal tracking
Switching voltage	max. 30 V DC
Switching current	max. 100 mA
Voltage drop	U _d ≤ 2 V DC
Switching frequency	f see Table 1, max. 129 Hz
Response time	see Table 1, max. 16 ms
Timer function	Off-delay programmable from 0 ... 1.25 s in 5 ms steps (adjustment via IO-Link only)

Ambient conditions

Ambient temperature	Standard : -10 ... 60 °C (14 ... 140 °F) Option /146: -30 ... 60 °C (-22 ... 140 °F)
Storage temperature	-30 ... 70 °C (-22 ... 158 °F)

Mechanical specifications

Housing width	20 mm
Housing depth	30.5 mm
Housing length L	see Table 1, max. 3360 mm

Accessories**OMH-LGS-01**

Attachment aid for light grid series LGS/ LGM

OMH-SLCT-06

Swivel Bracket

OMH-SLCT-01

Quick clamp and adjustment system

V19-G-EMV-BK0,3M-PVC-V19-G

Double-ended cordset, M12 to M12, with EMC filter, 8-pin, PVC cable

OMH-SLCT-03

Mounting bracket including adjustment

OMH-SLCT-04

Mounting bracket including adjustment (with loose bearing)

OMH-SLCT-05

Mounting bracket including adjustment

AA SLCT-01

Profile alignment aid; simplified alignment of the SLCS and SLCT safety light curtains

V1-G-BK2M-PUR-U

Female cordset, M12, 4-pin, PUR cable

V1-G-BK5M-PUR-U

Female cordset, M12, 4-pin, PUR cable

V1-G-BK10M-PUR-U

Female cordset, M12, 4-pin, PUR cable

V1-G-BK15M-PUR-U

Female cordset, M12, 4-pin, PUR cable

V19-G-BK10M-PUR-IEC

Female cordset, M12, 8-pin, PUR-cable

V19-G-BK2M-PUR-IEC

Female cordset, M12, 8-pin, PUR-cable

V19-G-BK5M-PUR-IEC

Female cordset, M12, 8-pin, PUR-cable

V19-G-BK2M-PUR-U-V1-G

Connection cable, M12 to M12, 8/4-pin, PUR cable

IO-Link-Master02-USB

IO-Link master, supply via USB port or separate power supply, LED indicators, M12 plug for sensor connection

IO-Link-Master-USB DTM

Communication DTM for use of IO-Link-Master

PACTware 4.1

FDT Framework

IODD Interpreter DTM

Software for the integration of IODDs in a frame application (e. g. PACTware)

LGS IODD

IODD for communication with LGS-IO-Link sensors

V1-G-BK0,6M-PUR-U-V1-G-LGS25T

Cordset, LGS25 light grids to ICE modules/WIS 2, M12 to M12, PUR cable, 4-pin

Degree of protection	IP67
Connection	Emitter: 200 mm connecting cable with 4-pin, M12x1 connector Receiver: 200 mm connecting cable with 8-pin, M12 x 1 connector Cable cross section min. 0.25 mm ² Max. cable length 30 m
Material	
Housing	extruded aluminum section , Silver anodized
Optical face	Plastic pane , Polycarbonate
Mass	see Table 1, max. 1750 g (per profile)
Compliance with standards and directives	
Directive conformity	
EMC Directive 2004/108/EC	EN 60947-5-2:2007
Standard conformity	
Product standard	EN 60947-5-2:2007 IEC 60947-5-2:2007
Approvals and certificates	
Protection class	III (IEC 61140)
UL approval	cULus Listed
CCC approval	CCC approval / marking not required for products rated ≤36 V


Operating principle

The light grid consists of a transmitter and a receiver, between which is the area to be monitored. The switch command is initiated by the entry or existence of a body/object in the monitoring field.

The modular system design supports a wide range of distances for the lines of light. Optimum implementation of the LGS series light grids for specific application requirements is thus possible.

The system also has 3 switch outputs for height checking. The system is programmed using the integrated touch field or the IO-Link interface.

Curves/Diagrams

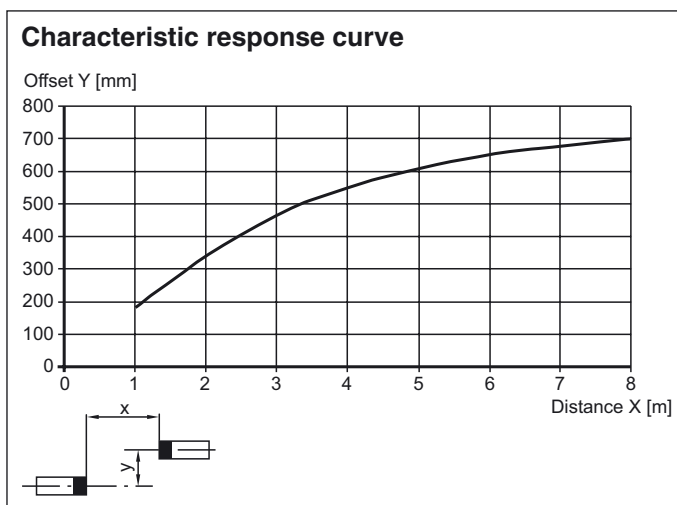

Additional information

Table 1:

Switch-on delay, maximum switching frequency and maximum time delay before availability:

Field height [mm]	Switch-on delay Q [ms] without object parameterization		Switch-on delay Q [ms] with object parameterization, HQn outputs		Max. switching frequency [Hz]	Max. time delay before availability t _v [s]
	typ.	max.	typ.	max.		
100	3	4	5	7	129	0.8
200	3	5	5	7	118	0.9
300	3	5	6	8	109	1.0
400	3	5	6	9	101	1.0
500	3	6	6	10	94	1.1
600	3	6	7	10	88	1.2
700	4	7	7	11	82	1.3
800	4	7	7	12	78	1.3
900	4	7	8	13	73	1.4
1000	4	8	8	13	70	1.5

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Field height [mm]	Switch-on delay Q [ms] without object parameterization		Switch-on delay Q [ms] with object parameterization, HQn outputs		Max. switching frequency [Hz]	Max. time delay before availability t _v [s]
1100	4	8	9	14	66	1.5
1200	5	8	9	15	63	1.6
1300	5	9	9	16	60	1.7
1400	5	9	10	16	58	1.8
1500	5	10	10	17	56	1.8
1600	5	10	10	18	53	1.9
1700	6	10	11	19	51	2.0
1800	6	11	11	19	49	2.0
1900	6	11	12	20	48	2.1
2000	6	11	12	21	46	2.2
2100	6	12	12	22	45	2.3
2200	6	12	13	22	43	2.3
2300	7	13	13	23	42	2.4
2400	7	13	13	24	41	2.5
2500	7	13	14	25	40	2.5
2600	7	14	14	25	38	2.6
2700	7	14	15	26	37	2.7
2800	8	14	15	27	36	2.8
2900	8	15	15	27	35	2.8
3000	8	15	16	28	35	2.9
3100	8	16	16	29	34	3.0
3200	8	16	16	30	33	3.0

Number of beams, housing length and weight:

Field height [mm]	Number of beams	Overall length of the transmitter/receiver unit [mm]	Weight of the transmitter/receiver unit [g]
100	7	260	200
200	13	360	250
300	19	460	300
400	25	560	350
500	31	660	400
600	37	760	450
700	43	860	500
800	49	960	550
900	55	1060	600
1000	61	1160	650
1100	67	1260	700
1200	73	1360	750
1300	79	1460	800
1400	85	1560	850
1500	91	1660	900
1600	97	1760	950
1700	103	1860	1000
1800	109	1960	1050
1900	115	2060	1100
2000	121	2160	1150
2100	127	2260	1200
2200	133	2360	1250
2300	139	2460	1300
2400	145	2560	1350
2500	151	2660	1400
2600	157	2760	1450
2700	163	2860	1500
2800	169	2960	1550
2900	175	3060	1600
3000	181	3160	1650
3100	187	3260	1700
3200	193	3360	1750

Design and function

Safety information

The device must only be operated with Safety Extra Low Voltage (SELV) with safe electrical disconnection. Intervention and repairs must only be carried out by your suppliers.

The system must be serviced and checked regularly.

A clean, soft cloth can be used for cleaning. Aggressive, abrasive cleaning agents that damage the surface must be avoided. The device must not be subjected to hard knocks or vibration.

Commissioning

Prerequisites

- The transmitter and receiver must be installed and aligned correctly.
- The electrical connection must be established according to the connection diagram.
- The signal output must respond to object detection.
- If at least one light beam is interrupted, the output remains active as long as the object is detected.

Fault location

- Measure operating voltage
- Check the cabling.
- Check the transmitter and receiver for dirt and clean if necessary.

Function displays

Behind the optics cover on the connection side of the profiles there is a green Power ON operating indicator LED and a yellow status display LED.

Transmitter

Function	Diagnostic description
Green operating indicator LED lights up statically	Power-On
Green operating indicator LED is dark and yellow status indicator flashes	Power save mode
Yellow status indicator LED is dark	Transmitter with low transmitting power
Yellow status indicator LED lights up statically	Transmitter with high transmitting power
Yellow status indicator LED flashes quickly (approx. 8 Hz)	Error condition
Yellow status indicator LED light changes for short time	Test input is activated

Receiver

Function	Diagnostic description
Green operating indicator LED lights up statically	Power-On
Green operating indicator LED is dark	Power save mode
Green operating indicator LED flashes with brief interruption	IO-Link mode active, parameterisation only possible via IO-Link
Green operating indicator LED flashes (4 Hz)	Error condition: Short circuit at the outputs
Yellow status indicator LED lights up statically	Detection field interrupted
Yellow status indicator LED is dark	Detection field is enabled.
Yellow status indicator LED flashes (approx. 4 Hz)	Insufficient function reserve
Yellow status indicator LED flashes quickly (approx. 8 Hz)	Error condition: Incorrect signal measurement


Resolution and beam clearance

The mechanical beam clearance determines the smallest detectable object size. Crossing the light beams increases the resolution of the light grid.


The devices are delivered without programmed height checking. The beam is crossed three times.

Resolution of the crossed beam arrangement

If three-way crossing of the beams is programmed, the resolution increases. For a three-way crossing, this means that the increased resolution is offered after 25% of the transmitter range or receiver range. It must therefore be ensured that all objects pass transmitters or receivers with this clearance.

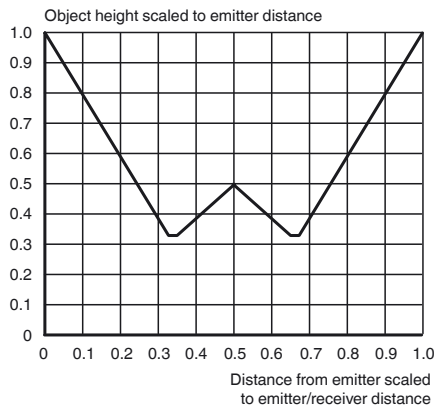

Model number



Resolution [mm]
(see technical data)

Detection field [mm]
(see technical data)

IO-Link interface

Options

- /35 extended detection range 8 m
- /110 Push-pull output, switch output 0.1 A, short-circuit protected, reverse polarity protection
- /115b with 0.2 m fixed cable and M12 connector
- /146 extended temperature range -30 °C