

Features


- 4-channel
- Inputs Ex ia
- Installation in suitable enclosures in Zone 1
- Module can be exchanged under voltage (hot swap)
- Power supply for 2-wire transmitters with 4 mA ... 20 mA
- Supply circuit 15 V (20 mA)
- Input from active signals of 4-wire transmitters
- Simulation mode for service operations (forcing)
- Line fault detection (LFD): one LED per channel
- Permanently self-monitoring

Function


The transmitter power supply feeds 2- and 3-wire transmitters. Active signals from separately powered field devices and 4-wire transmitters can be connected. Open and short-circuit line faults are detected. The intrinsically safe inputs are galvanically isolated from the bus and the power supply.

Assembly

Front view

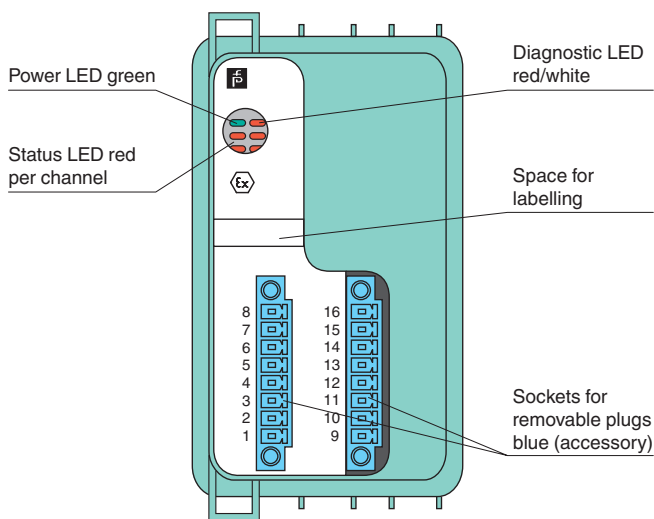

Connection

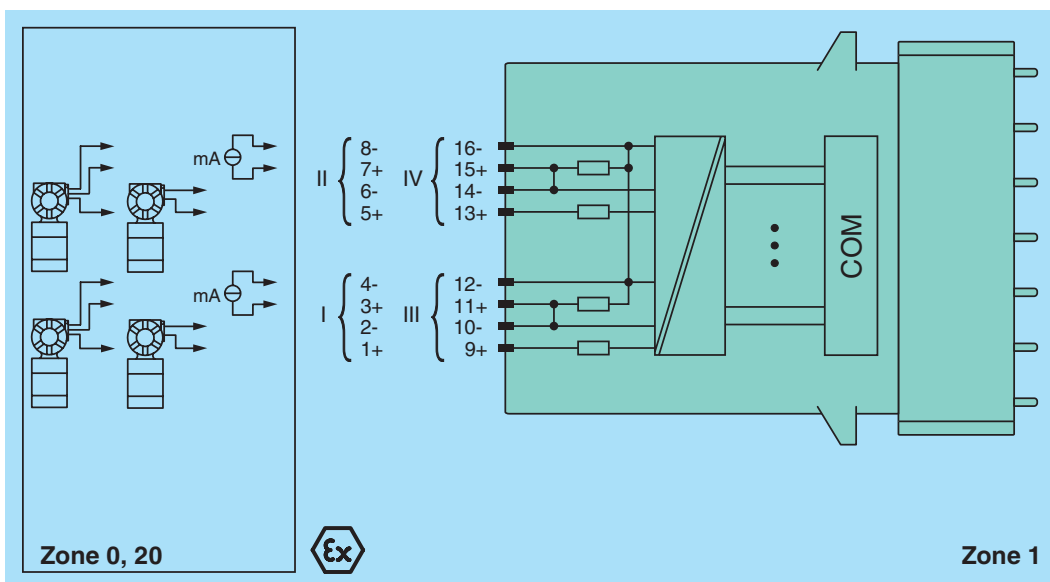

Release date 2018-09-14 09:47 Date of issue 2018-09-14 239397_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

| | |
|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Slots | |
| Occupied slots | 2 |
| Supply | |
| Connection | backplane bus |
| Rated voltage | U_r 12 V DC , only in connection with the power supplies FB92** |
| Power dissipation | 1.5 W |
| Power consumption | 2.7 W |
| Internal bus | |
| Connection | backplane bus |
| Interface | manufacturer-specific bus to standard com unit |
| Analog input | |
| Number of channels | 4 |
| Suitable field devices | |
| Field device | pressure converter |
| Field device [2] | flow converter |
| Field device [3] | level converter |
| Field device [4] | Temperature Converter |
| Field device interface | |
| Connection | 2-wire transmitter |
| Connection [2] | 3-wire transmitter |
| Connection [3] | 4-wire transmitter |
| Connection | 2-wire transmitter: supply circuit: channel I 1+, 2-, channel II 5+, 6-, channel III 9+, 10-, channel IV 13+, 14- 3-wire transmitter: supply circuit: channel I 1+, 4-, channel II 5+, 8-, channel III 9+, 12-, channel IV 13+, 16- measuring circuit: channel I 3+, 4-, channel II 7+, 8-, channel III 11+, 12-, channel IV 15+, 16- 4-wire transmitter (separately powered): measuring circuit: channel I 3+, 4-, channel II 7+, 8-, channel III 11+, 12-, channel IV 15+, 16- |
| Transmitter supply voltage | ≥ 15 V at 20 mA ; 21.5 V at 4 mA |
| Input resistance | 15 Ω |
| Conversion time | ≤ 100 ms |
| Line fault detection | can be switched on/off for each channel via configuration tool , configurable via configuration tool |
| Short-circuit | factory setting: > 22 mA configurable between 0 ... 26 mA |
| Open-circuit | factory setting: < 1 mA configurable between 0 ... 26 mA |
| HART communication | no |
| HART secondary variable | no |
| Analog output | |
| HART communication | no |
| HART secondary variable | no |
| Transfer characteristics | |
| Deviation | |
| After calibration | 0.1 % of the signal range at 20 °C (68 °F) |
| Influence of ambient temperature | 0.1 %/10 K of the signal range |
| Resolution | 12 Bit (0 ... 26 mA) |
| Refresh time | 100 ms |
| Indicators/settings | |
| LED indication | Power LED (P) green: supply Diagnostic LED (I) red: module fault , red flashing: communication error , white: fixed parameter set (parameters from com unit are ignored) , white flashing: requests parameters from com unit Status LED (1-4) red: line fault (lead breakage or short circuit) |
| Coding | optional mechanical coding via front socket |
| Directive conformity | |
| Electromagnetic compatibility | |
| Directive 2014/30/EU | EN 61326-1:2006 |
| Conformity | |
| Electromagnetic compatibility | |
| Degree of protection | IEC 60529:2000 |
| Environmental test | EN 60068-2-14:2009 |
| Shock resistance | EN 60068-2-27:2009 |
| Vibration resistance | EN 60068-2-6:2008 |
| Damaging gas | EN 60068-2-42:2003 |
| Relative humidity | EN 60068-2-78:2001 |
| Ambient conditions | |
| Ambient temperature | -20 ... 60 °C (-4 ... 140 °F) |
| Storage temperature | -25 ... 85 °C (-13 ... 185 °F) |
| Relative humidity | 95 % non-condensing |

Release date 2018-09-14 09:47 Date of issue 2018-09-14 239397_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

| | | |
|----------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|
| Shock resistance | shock type I, shock duration 11 ms, shock amplitude 15 g, number of shocks 18 | |
| Vibration resistance | frequency range 10 ... 150 Hz; transition frequency: 57.56 Hz, amplitude/acceleration ± 0.075 mm/1 g; 10 cycles frequency range 5 ... 100 Hz; transition frequency: 13.2 Hz amplitude/acceleration ± 1 mm/0.7 g; 90 minutes at each resonance | |
| Damaging gas | designed for operation in environmental conditions acc. to ISA-S71.04-1985, severity level G3 | |
| Mechanical specifications | | |
| Degree of protection | IP20 (module) , a separate housing is required acc. to the system description | |
| Connection | removable front connector with screw flange (accessory) wiring connection via spring terminals (0.14 ... 1.5 mm ²) or screw terminals (0.08 ... 1.5 mm ²) | |
| Mass | approx. 750 g | |
| Dimensions | 57 x 107 x 132 mm (2.2 x 4.2 x 5.2 inch) | |
| Data for application in connection with hazardous areas | | |
| EU-Type Examination Certificate | BVS 12 ATEX E 101 X | |
| Marking | Ex II 2(1) G Ex d [ia Ga] IIC T4 Gb Ex II (1) D [Ex ia Da] IIIC | |
| Supply | | |
| Voltage | U _o | 27 V |
| Current | I _o | 90 mA |
| Power | P _o | 588 mW (linear characteristic) |
| Input | | |
| Voltage | U _o | 0.7 V |
| Current | I _o | 2.78 mA |
| Power | P _o | 2 mW (trapezoid characteristic curve) |
| Internal capacitance | C _i | 242 nF |
| Internal inductance | L _i | 0 mH |
| Galvanic isolation | | |
| Input/power supply, internal bus | safe electrical isolation acc. to EN 60079-11:2007 , voltage peak value 375 V | |
| Directive conformity | | |
| Directive 2014/34/EU | EN 60079-0:2009 EN 60079-1:2007 EN 60079-11:2012 EN 60079-26:2007 | |
| International approvals | | |
| ATEX approval | BVS 12 ATEX E 101 X | |
| INMETRO | Brazil: TÜV 14.1597X | |
| Marine approval | Bureau Veritas Marine | |
| Bureau Veritas Marine | 22449/B0 BV | |
| General information | | |
| System information | The module has to be mounted in appropriate backplanes and housings (FB92**) in Zone 1, 2, 21, 22 or outside hazardous areas (gas or dust). Here, observe the corresponding EC-type examination certificate. | |
| Supplementary information | EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com . | |

Release date 2018-09-14 09:47 Date of issue 2018-09-14 239397_eng.xml