


## M12-Bus terminating plug for CUBE67

Cube67  
Terminating resistor  
Male  
M12, 6-pole  
A-coded


Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.



### [Link to Product](#)

#### Illustration

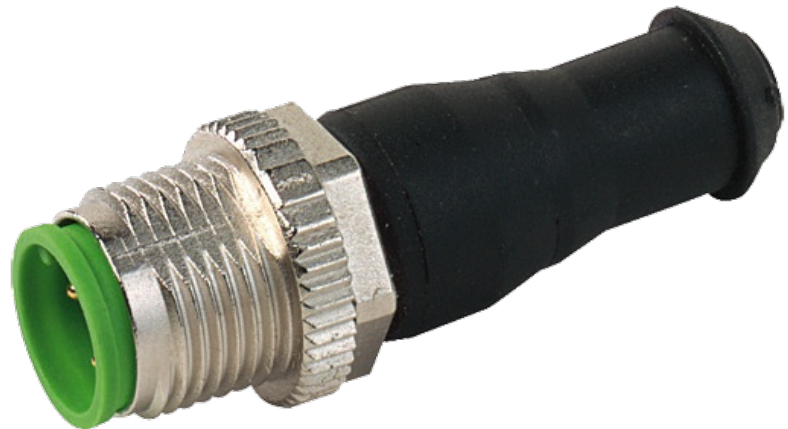

Male

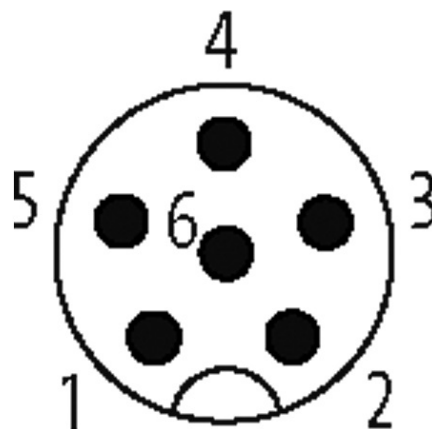

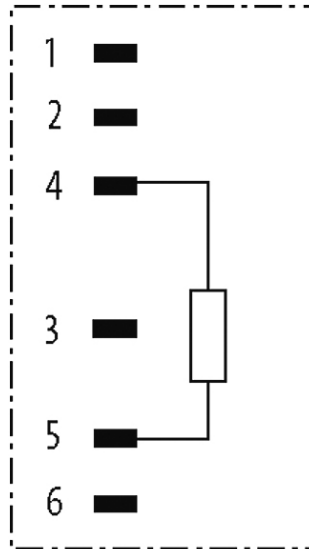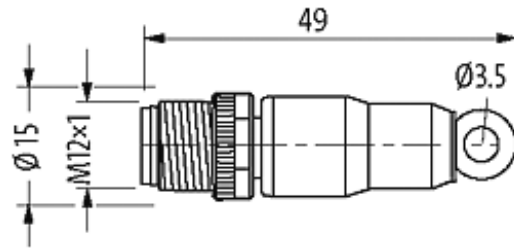

Product may differ from Image

### Approvals



### Form

Form 15041

### Technical Data

Operating voltage	max. 30 V DC
Operating voltage (only UL listed)	max. 30 V DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread M12 x 1 mm (recommended torque 0.6 Nm) self-securing
Protection	IP67 inserted and tightened (EN 60529)

### General data

Temperature range -25...+85 °C

### Commercial data

country of origin	DE
customs tariff number	85332100

EAN	4048879196963
eClass	19070403
Packaging unit	1