

ADAPTOR M12 MALE/ M8 FEMALE 3 POLE CONF. 1,3,4

Adapter

Male/female

M12 – M8, 3-pole

for M12 distribution box, 3-pole

Art-No. 7005 - M12/M8 Lite - (plastic hexagonal screw) on request




[Link to Product](#)


Illustration



Male

Female

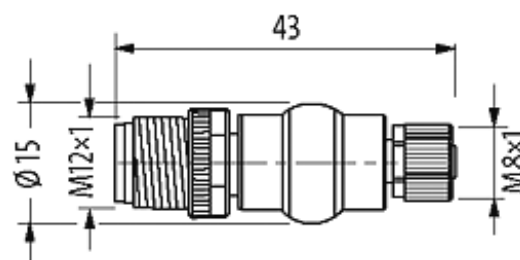

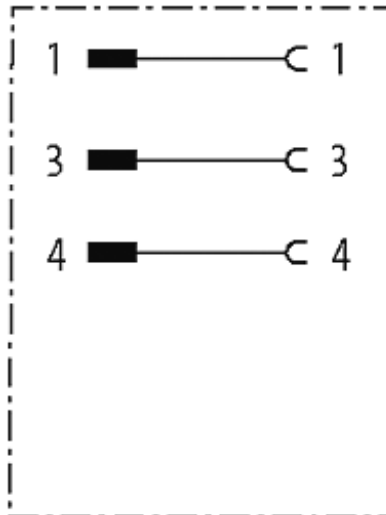

Product may differ from Image

Approvals



Form

Form 42201

Technical Data

Operating voltage	max. 50 V AC/60 V DC
Operating voltage (only UL listed)	max. 30 V AC/DC
Rated surge voltage	1.5 kV
Operating current per contact	max. 4 A
Material group	IEC 60664-1, category I
No. of poles	3
Coding	M12, A-coded
Locking of ports	Screw thread M8/M12 × 1 mm (recommended torque 0.4/0.6 Nm) self-securing
Compression gland	M8 (SW9), M12 (SW13)
Protection	IP67 inserted and tightened (EN 60529)
Locking material	Zinc die casting, matte nickel plated
Material	PUR

General data

Standards	DIN EN 61076-2-101 (M12), DIN EN 61076-2-104 (M8)
Pollution Degree	3
Temperature range	-25...+85 °C

Commercial data

country of origin	DE
-------------------	----

customs tariff number	85369010
EAN	4048879143202
eClass	27143423
Packaging unit	1