


**MCS-A ASI POWER SUPPLY 1-PHASE,**


IN: 95-265VAC OUT: 30,5V/4ADC

INPUT: 95...265 V AC

Current: 4 A

Single-phase, primary switched Protection IP20

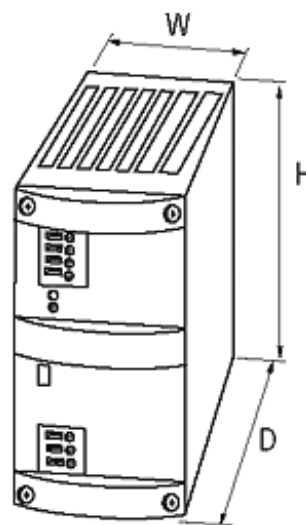[Link to Product](#)**Illustration**

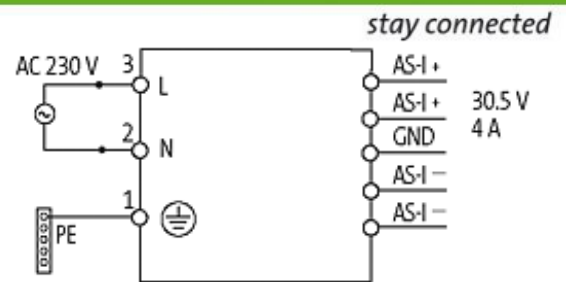

Product may differ from Image

### Approvals



### Input

Input voltage	95...265 V AC
Input current	2.1 A
Inrush current after 1 ms	max. 35 A (230 V AC)
Primary fusing external	max. 10 A (T)
Frequency	50...60 Hz

### General data

Standards	EN 60950-1, EN 61204-3, EN 55022 B
Mounting method	DIN-rail mountable TH35 (EN 60715)
Efficiency	83% (110 V AC); 85% (240 V AC)
AS-Interface	Unit complies to AS-Interface specification for power supplies (PELV)
Dimensions H x W x D	115x54x147 mm
Temperature range	-10...+40 °C, ...+55 °C derating (storage temperature -25...+85 °C)

### Output

Output voltage	30.5 V DC (SELV), ±2%
Output current	max. 4.0 A (+40 °C); 3.4 A (+55 °C)
Output rating	122 W
Mains failure bridging time	min. 14 ms (110 V AC); min. 80 ms (230 V AC)
Unit protection	Short-circuit and overload protected
Ripple	max. 20 mVrms
LED display	LED (green) for output voltage
Output filter	Filter acc. to AS-Interface specification

### Commercial data

country of origin	CZ
customs tariff number	85044090
EAN	4048879079907
eClass	27049002
Packaging unit	1

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/19

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

