


# Connector ø9, Snap-In, with attached PUR-cable

## dimension drawing

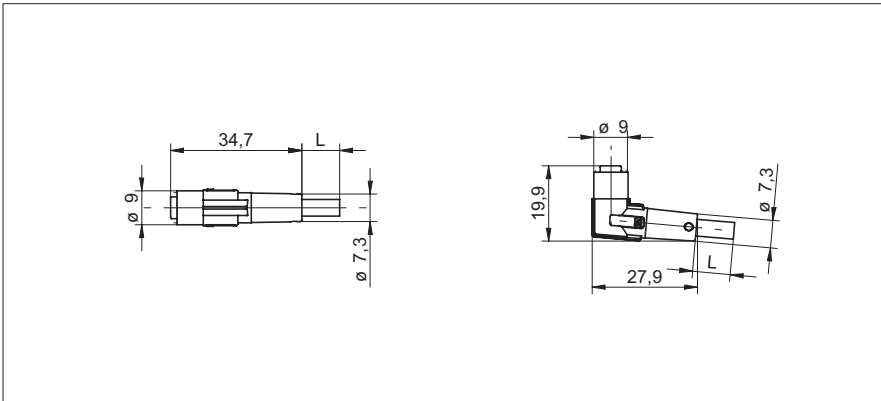

- 3-wire
- PUR halogen-free
- Snap-In
- suitable for flexible cable carriers
- UL listing file No. E315836

## General data

Nominal current $I_N$	4 A
Nominal voltage $U_N$	60 V
Number of positions	3
Volume resistance	$\leq 5 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$
Length of cable	see listing
Stripping length of the free conductor end	50 mm

## General characteristics


Coding	A-standard
Surge voltage category	II
Pollution degree	3
Degree of protection	IP65/IP67
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material of grip body	TPU, hardly inflammable, self-extinguishing
Sealing material	NBR
Status display	no

## Conductor data

Cable type	PUR halogen-free black
Cable abbreviation	Li9Y11Y-HF
Conductor cross section	0,25 mm <sup>2</sup>
AWG signal line	24
Conductor structure, signal line	32x0,10 mm
Core diameter including insulation	1,15 mm $\pm 0,05$ mm
Thickness, insulation	ca. 0,38 mm (Core insulation)
External cable diameter	4,40 mm $\pm 0,15$ mm
Wire colors	Brown, blue, black
External sheath, color	Black-gray RAL 7021

type	Mat.-No.	length
<b>straight connectors</b>		
ESG 09SH0200	10256125	2 m
ESG 09SH0500	10257812	5 m
ESG 09SH1000	10220978	10 m
<b>angular connectors</b>		
ESW 08SH0200	10258092	2 m
ESW 08SH0500	10257811	5 m
other lengths on request		

## pin assignment

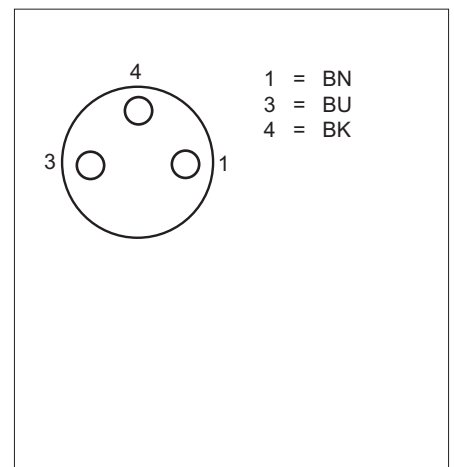

## Connector ø9, Snap-In, with attached PUR-cable

<b>Conductor data (cont.)</b>	
Conductor resistance	≤ 78 Ω/km
Nominal voltage, conductor	300 V
Test voltage, conductor	4000 V
Overall twist	3 wires, twisted
Outer sheath, material	PUR
Material conductor insulation	PP
Conductor material	Bare Cu litz wires
Cable weight	23 kg/km
Smallest bending radius, movable installation	44 mm
Number of bending cycles	4'000'000
Bending radius	44 mm
Traversing path	10 m
Traversing rate	3 m/s
Acceleration	10 m/s <sup>2</sup>
Ambient temperature (operation)	-40 ... 80 °C (cable, fixed installation)
	-5 ... 80 °C (cable, flexible installation)
Special properties	Flexible cable conduit capable
	Silicone-free
	Free of substances which would hinder coating with paint or varnish
Flame resistance	As per UL-Style 20549
Halogen-free	As per DIN VDE 0472 part 815
Resistance to oil	complying with DIN EN 60811-2-1
Other resistance	Highly resistant to acids, alkaline solutions and solvents
	hydrolysis and microbe resistant