

Absolute encoders - bus interfaces

Solid shaft $\varnothing 11$ mm with EURO flange B10 or housing foot B3

EtherNet/IP / 13 bit ST / 16 bit MT / Speed switch

PMG10 - EtherNet/IP



PMG10 - picture similar

Technical data - electrical ratings

Voltage supply	10...30 VDC
Short-circuit proof	Yes
Consumption w/o load	≤ 200 mA
Initializing time	≤ 500 ms after power on
Interface	EtherNet/IP
Function	Multiturn
Transmission rate	100 MBaud
Device address	HEX rotary switches in box or with "BOOTP/DHCP tool"
Steps per revolution	8192 / 13 bit
Number of revolutions	65536 / 16 bit
Additional outputs	Square-wave TTL/HTL, TTL/RS422
Sensing method	Magnetic
Interference immunity	EN 61000-6-2
Emitted interference	EN 61000-6-3
Programmable parameters	Steps per revolution Number of revolutions Preset, scaling, rotating direction
Diagnostic function	Position or parameter error
Status indicator	DUO-LED und LEDs link/activity in bus connecting box 4 LEDs in device back side
Approval	CE

Technical data - electrical ratings (speed switches)

Switching accuracy	± 2 % (or 1 Digit)
Switching outputs	1 output (Open collector, solid state relay on request)
Output switching capacity	30 VDC; ≤ 100 mA
Switching delay time	≤ 20 ms

Features

- Interface EtherNet/IP
- Magnetic sensing method
- Resolution: singleturn 13 bit, multiturn 16 bit
- Function display via LEDs
- Multiturn sensing with Energy Harvesting technology, without gear or battery
- Two-sided bearing system with hybrid bearings
- Special protection against corrosion C5-M

Optional

- Integrated speed switch
- Additional output incremental with zero pulse

Technical data - mechanical design

Size (flange)	$\varnothing 115$ mm
Shaft type	$\varnothing 11$ mm solid shaft
Flange	EURO flange B10 Housing foot B3
Protection DIN EN 60529	IP 66/IP 67
Operating speed	≤ 6000 rpm
Range of switching speed	ns (off) = $\pm 2 \dots 6000$ rpm, factory setting 6000 rpm
Operating torque typ.	10 Ncm
Rotor moment of inertia	1 kgcm ²
Admitted shaft load	≤ 450 N axial ≤ 650 N radial
Materials	Housing: aluminium alloy Shaft: stainless steel
Corrosion protection	IEC 60068-2-52 Salt mist for ambient conditions C5-M (CX) according to ISO 12944-2
Operating temperature	-40...+85 °C
Relative humidity	95 % non-condensing
Resistance	IEC 60068-2-6 Vibration 30 g, 10-2000 Hz IEC 60068-2-27 Shock 400 g, 1 ms
Weight approx.	2.7 kg (depending on version)
Connection	Bus connecting box Terminal box incremental

Absolute encoders - bus interfaces

Solid shaft \varnothing 11 mm with EURO flange B10 or housing foot B3

EtherNet/IP / 13 bit ST / 16 bit MT / Speed switch

PMG10 - EtherNet/IP

Part number

PMG10

	-S			.	1		EN	.3		00		.A
--	----	--	--	---	---	--	----	----	--	----	--	----

Additional output*

- 0 Without
 - 5 1024 ppr TTL/HTL (Vin=Vout), 6 channels, electrically isolated
 - 6 1024 ppr TTL/RS422, 6 channels
- See also table "Additional output"

Resolution multiturm

- 0 Without
- 6 16 bit

Voltage supply / interface

EN 10...30 VDC, EtherNet/IP

Connection

- 3 1x bus connecting box with 3 connectors M12, radial
- G 1x bus connecting box with 3 connectors M12, radial + 1x terminal box with 1 cable gland M20, radial

Shaft diameter

1 \varnothing 11 mm with key 4 mm

Protection

- D IP 66 and IP 67, optimized for dusty environments
- L IP 66 and IP 67, optimized for oily and wet environments

Flange

- H EURO flange B10, shaft insulation hybrid bearing
- A Housing foot B3, shaft insulation hybrid bearing

Speed switch*

- Without
- D With speed switch (**))
(Standard: Open collector, solid state relay on request)

* Only for connection with 1x bus connecting + 1x terminal box (G)

** Please specify the exact switching speed in addition to the part number (factory setting).

Absolute encoders - bus interfaces

Solid shaft $\varnothing 11$ mm with EURO flange B10 or housing foot B3

EtherNet/IP / 13 bit ST / 16 bit MT / Speed switch

PMG10 - EtherNet/IP

Part number - tables

Additional output*

0 (Without)
Q (8192 ppr TTL/HTL (Vin=Vout), 6 channels, electrically isolated)
P (8192 ppr TTL/RS422, 6 channels)
G (5000 ppr TTL/HTL (Vin=Vout), 6 channels, electrically isolated)
H (5000 ppr TTL/RS422, 6 channels)
K (4096 ppr TTL/HTL (Vin=Vout), 6 channels, electrically isolated)
J (4096 ppr TTL/RS422, 6 channels)
7 (3072 ppr TTL/HTL (Vin=Vout), 6 channels, electrically isolated)
8 (3072 ppr TTL/RS422, 6 channels)
9 (2048 ppr TTL/HTL (Vin=Vout), 6 channels, electrically isolated)
4 (2048 ppr TTL/RS422, 6 channels)
5 (1024 ppr TTL/HTL (Vin=Vout), 6 channels, electrically isolated)
6 (1024 ppr TTL/RS422, 6 channels)
1 (512 ppr TTL/HTL (Vin=Vout), 6 channels, electrically isolated)
2 (512 ppr TTL/RS422, 6 channels)

Accessories

Mounting accessories

K 35	Spring washer coupling for solid shaft $\varnothing 6...12$ mm
K 50	Spring washer coupling for solid shaft $\varnothing 11...16$ mm
K 60	Spring washer coupling for solid shaft $\varnothing 11...22$ mm

Absolute encoders - bus interfaces


Solid shaft $\varnothing 11$ mm with EURO flange B10 or housing foot B3

EtherNet/IP / 13 bit ST / 16 bit MT / Speed switch

PMG10 - EtherNet/IP


EtherNet/IP - Terminal assignment

View A¹⁾ - View inside bus connecting box

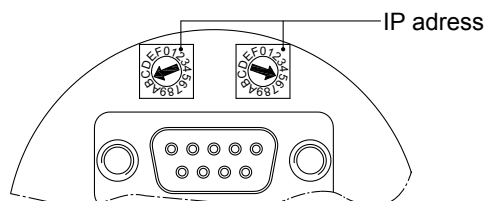


View A¹⁾ - View onto connector „Voltage supply“

male	Connection	Description
1	UB	Voltage supply 10...30 VDC
2	-	Do not use
3	GND	Ground for UB
4	-	Do not use

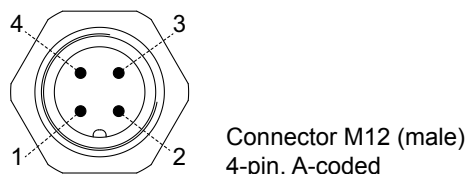

View A²⁾ and **A³⁾** - View into connector „Data transmission“


female	Connection	Description
1	TxD+	Transmission data+
2	RxD+	Receiving data+
3	TxD-	Transmission data-
4	RxD-	Receiving data-

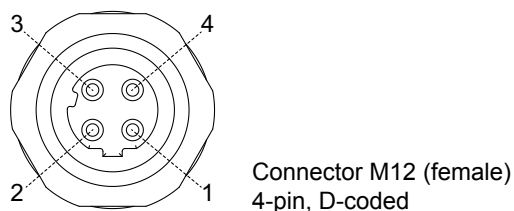

EtherNet/IP - Features

Bus protocol	EtherNet/IP
Device profile	Encoder Device, type 22hex, according to CIP specification
Features	100 MBaud Fast Ethernet IP address programmable Automatic IP address designation (DHCP) Rotating direction, resolution, total resolution and preset are programmable according to CIP specification
Process data	Position value, warning flag, error flag. Assembly Instances 1 and 2 according to CIP specification

EtherNet/IP - IP address



Defined by HEX rotary switch.
Example: IP address B5_{hex}
Configuration via DHCP: 00_{hex}

¹⁾ See dimensions

Absolute encoders - bus interfaces

Solid shaft $\varnothing 11$ mm with EURO flange B10 or housing foot B3

EtherNet/IP / 13 bit ST / 16 bit MT / Speed switch


PMG10 - EtherNet/IP

Speed switch / additional output incremental - Terminal significance

Ub ²⁾	Voltage supply
0V ²⁾	Ground
A+ ²⁾	Output signal channel 1
A- ²⁾	Output signal channel 1 inverted
B+ ²⁾	Output signal channel 2 (offset by 90° to channel 1)
B- ²⁾	Output signal channel 2 inverted
R+ ²⁾	Zero pulse (reference signal)
R- ²⁾	Zero pulse inverted
nE+	System OK+ / error output
nE-	System OK- / error output inverted
SP+ ³⁾	DSL_OUT1 / speed switch (Open collector, solid state relay on request)
SP- ³⁾	DSL_OUT2 / speed switch (0V, solid state relay on request)
dnu	Do not use

Speed switch / additional output incremental - Terminal assignment terminal box

View B¹⁾

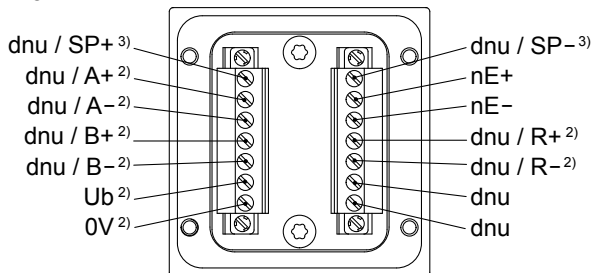

Additional output incremental - Trigger level

Trigger level	TTL/RS422
High / Low	≥ 2.5 V / ≤ 0.5 V
Transmission length	≤ 550 m @ 100 kHz
Output frequency	≤ 600 kHz
Trigger level	TTL/HTL (Vin = Vout)
High / Low	≥ 2.5 V / ≤ 0.5 V (TTL) $\geq U_b - 3$ V / ≤ 1.5 V (HTL)
Transmission length	≤ 550 m @ 100 kHz (TTL) ≤ 350 m @ 100 kHz (HTL)
Output frequency	≤ 600 kHz (TTL); ≤ 350 kHz (HTL)

Electrically isolated:

The output TTL/HTL (Vin = Vout) at the additional output incremental is electrically isolated and requires a separate power supply.


¹⁾ See dimensions

²⁾ Additional output incremental (option)


³⁾ Speed switch (option)

Additional output incremental - Output signals

Version with additional output incremental at positive rotating direction¹⁾

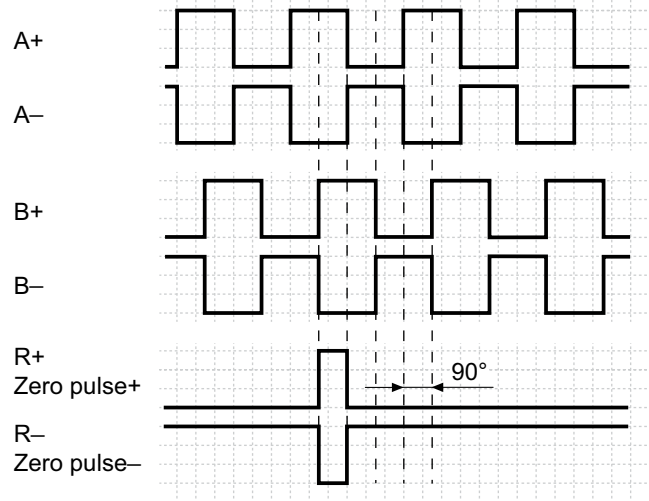

Speed switch - Switching characteristics

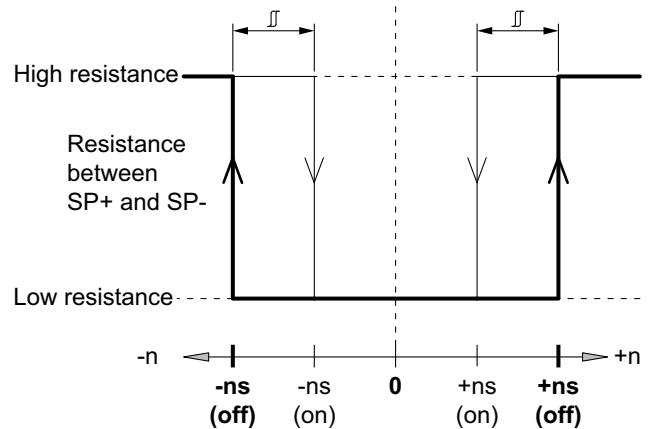

n = Speed

+ns (off) = Switch-off speed at shaft rotation in positive rotating direction¹⁾.

-ns (off) = Switch-off speed at shaft rotation in negative rotating direction¹⁾.

Switching hysteresis Δ :
5...100 % (factory setting = 10 % min. 1 Digit)

+ns (on) = Switch-on speed at shaft rotation in positive rotating direction¹⁾.

-ns (on) = Switch-on speed at shaft rotation in negative rotating direction¹⁾.

Absolute encoders - bus interfaces


Solid shaft $\varnothing 11$ mm with EURO flange B10 or housing foot B3

EtherNet/IP / 13 bit ST / 16 bit MT / Speed switch

PMG10 - EtherNet/IP

Dimensions

Version with EURO flange B10

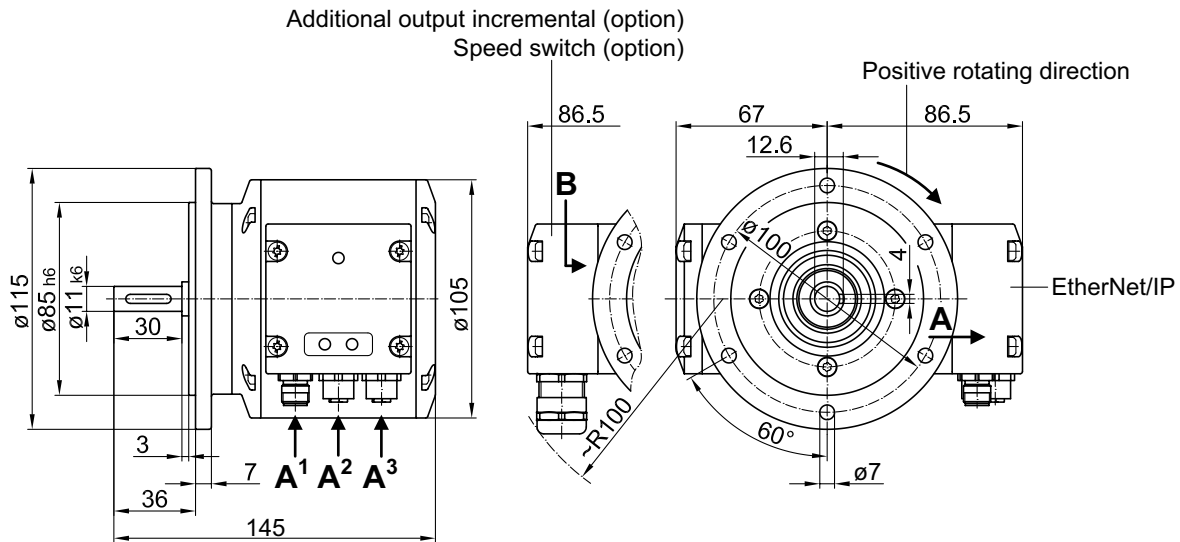

Version with housing foot B3

