

Digital Modules ASi in IP20, 22,5 mm



Cost efficient solution in IP20



(Figure similar)

Figure	Type	Housing	Primary application ⁽¹⁾	Inputs digital	Outputs digital	Input voltage (sensor supply) ⁽²⁾	Output voltage (actuator supply) ⁽³⁾	ASi connection ⁽⁴⁾	ASi address ⁽⁵⁾	Article No.
	IP20, 22,5 mm x 50 mm, 4 x COMBICON	4 x COMBICON	decentralized control cabinet	4	4 x electronic	out of ASi	out of ASi	clamps	1 AB address	BWU2783
	IP20, 22,5 mm x 50 mm, 4 x COMBICON	4 x COMBICON	decentralized control cabinet	4	4 x electronic	out of ASi	out of ASi	clamps	1 single address	BWU3272
	IP20, 22,5 mm x 50 mm, 4 x COMBICON	3 x COMBICON	decentralized control cabinet	4	—	out of ASi	—	clamps	1 AB address (S-0.A.7.0)	BWU3747
	IP20, 22,5 mm x 92 mm 4 x COMBICON	4 x COMBICON	control cabinet	4	4 x electronic	out of AUX	out of AUX	clamps	1 AB address	BWU3559
	IP20, 22,5 mm x 92 mm 4 x COMBICON	4 x COMBICON	control cabinet	4	4 x electronic	out of AUX	out of AUX	clamps	1 AB address	BWU3842
	IP20, 22,5 mm x 92 mm 4 x COMBICON	4 x COMBICON	control cabinet	4	3 x electronic	out of AUX	out of AUX	clamps	1 AB address	BWU3733
	IP20, 22,5 mm x 114 mm, 4 x COMBICON	3 x COMBICON	control cabinet	4	—	out of AUX	—	clamps	1 AB address	BWU2723
	IP20, 22,5 mm x 114 mm, 4 x COMBICON	4 x COMBICON	control cabinet	4	4 x electronic	out of AUX	out of AUX	clamps	1 AB address	BWU1938
	IP20, 22,5 mm x 114 mm, 4 x COMBICON	4 x COMBICON	control cabinet	4	4 x electronic	out of AUX	out of AUX	clamps	1 single address	BWU2759
	IP20, 22,5 mm x 114 mm, 4 x COMBICON	4 x COMBICON	control cabinet	8	—	out of AUX	—	clamps	2 AB addresses	BWU2721
	IP20, 22,5 mm x 114 mm, 4 x COMBICON	4 x COMBICON	decentralized control cabinet	4	—	out of ASi	—	clamps	1 AB address	BWU3265
	IP20, 22,5 mm x 114 mm, 4 x COMBICON	4 x COMBICON	decentralized control cabinet	4	—	out of AUX	—	clamps	1 AB address	BWU3266

Figure	Type	Housing	Primary application ⁽¹⁾	Inputs digital	Outputs digital	Input voltage (sensor supply) ⁽²⁾	Output voltage (actuator supply) ⁽³⁾	ASi connection ⁽⁴⁾	ASi address ⁽⁵⁾	Article No.
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	control cabinet	4	3 x relay	out of ASi	–	clamps	1 AB address	BWU3878
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	control cabinet	4	4 x relay	out of ASi	–	clamps	1 single address	BWU3435
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	control cabinet	4	4 x relay	out of ASi	–	clamps	1 single address (S-7.0.F.E)	BWU3658
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	control cabinet	4	4 x relay	out of ASi	–	clamps	1 AB address	BWU3549
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	control cabinet	8	8 x electronic	out of ASi	out of AUX	clamps	2 AB addresses	BWU3364
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	control cabinet	8	8 x electronic	out of AUX	out of AUX	clamps	2 AB addresses	BWU2490
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	control cabinet	8	8 x electronic	out of AUX	out of AUX	clamps	2 single addresses	BWU2800
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	control cabinet	8 (NPN)	8 x electronic (NPN)	out of AUX	out of AUX	clamps	2 AB addresses	BWU3359
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	decentralized control cabinet	4	4 x electronic	out of ASi	out of AUX	clamps	1 AB address	BWU3267
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	decentralized control cabinet	4	4 x electronic	out of AUX	out of AUX	clamps	1 AB address	BWU3268
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	decentralized control cabinet	4	4 x electronic	out of ASi	out of AUX	clamps	1 single address	BWU3754

(1) Primary Application

Control cabinet: Cost-optimized modules whereby the supply voltage for the sensors and actuators is connected via additional patch terminals. Optimal application in the main control cabinet.

Decentralized control cabinet: Ideal for use in decentralized control cabinets. 3-wire sensors or actuators can be connected directly to terminals in the module without additional patch terminals or the module has an extremely flat design.

(2) Input voltage (sensor supply): inputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, inputs shall not be connected to earth or to external potential.

(3) Output voltage (actuator supply): outputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, outputs shall not be connected to earth or to external potential


(4) ASi connection: the connection to ASi as well to AUX (auxiliary 24 V power) is made via yellow resp. black ASi profile cable with piercing technology or via M12 socket (in IP20 via clamps).

(5) ASi address: 1 AB address (max. 62 AB addresses/ASi network), 2 AB addresses (max. 31 modules with 2 AB addresses), Single addresses (max. 31 Single addresses/ASi network), mixed use allowed. For modules with two ASi nodes the 2nd ASi node is turned off as long as the 1st ASi node is addressed to address "0". Upon request, ASi nodes are available with specific ASi node profiles.

Article no.		BWU3272	BWU2783	BWU3747
General data				
Device type		input / output		input
Connection				
ASi / AUX connection		COMBICON plug		
Periphery connection		COMBICON plug		
Primary application		decentralized control cabinet		
Length of connector cable		I/O: max. 15 m ⁽¹⁾		
ASi				
Profile		S-7.0.E, ID1=F (default)	S-7.A.7, ID1=7 (fixed)	S-0.A.0, ID1=7 (default)
Address		1 single address	1 AB address	
Required Master profile		≥M0	≥M4	≥M3
Since ASi specification		2	3.0	2.1
Operating voltage		30 V (18 ... 31.6 V)		
Max. current consumption		165 mA		
Max. current consumption without sensor/ actuator supply		45 mA		
Input				
Number		4		
Power supply		out of ASi		
Sensor supply		short-circuit and overload protected according to EN 61131-2		
Power supply of attached sensors	up to +40 °C	120 mA, ∑ (In/Out) 120 mA ⁽²⁾		120 mA, ∑ (In) 120 mA ⁽⁵⁾
	at +55 °C	20 mA, ∑ (In/Out) 20 mA ⁽²⁾		20 mA, ∑ (In) 20 mA ⁽⁵⁾
Switching threshold		U<5 V (low) U>15 V (high)		
Output				
Number		4 x electronic		–
Power supply		out of ASi		–
Actuator supply		short-circuit and overload protected according to EN 61131		–
Max. output current	up to +40 °C	120 mA per output, ∑ (In/Out) 120 mA ⁽²⁾		–
	at +55 °C	20 mA, ∑ (In/Out) 20 mA ⁽²⁾		–
Display				
LED ASi (green)		an: ASi voltage on, flashing: ASi voltage on, but peripheral fault ⁽³⁾ or address 0 off: no ASi Voltage		
LED FLT/FAULT (red)		an: address 0 or offline flashing: peripheral fault ⁽³⁾ off: online		
LEDs I1 ... In (yellow)		state of inputs I1 ... I4		
LEDs O1 ... On (yellow)		state of outputs O1 ... O4		–


Article no.	BWU3272	BWU2783	BWU3747
Environment			
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131 EN 60529		
Can be used in passively safe paths up to SIL3/PLe	yes ⁽⁴⁾		
Operating altitude	max. 2000 m		
Ambient temperature	-25 °C ... +40 °C (up to max. +55 °C) ⁽²⁾ no condensation permitted		
Storage temperature	-25 °C ... +85 °C		
Housing	plastic, for DIN rail mounting		
Pollution Degree	2		
Protection category	IP20		
Tolerable loading referring to humidity	according to EN 61131-2		
Voltage of insulation	≥500 V		
Weight	65 g		
Dimensions (W / H / D in mm)	22,5 / 99 / 50,5		

(1) Loop resistance ≤150 Ω

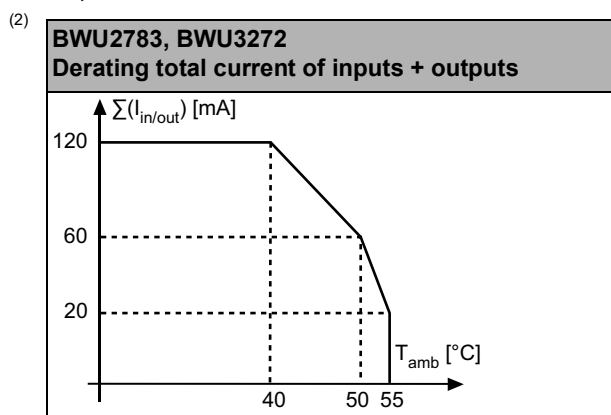

(3) see table „Peripheral fault indication“


(4) The module is suitable for use in passively safe paths as it has no connection to an AUX potential.

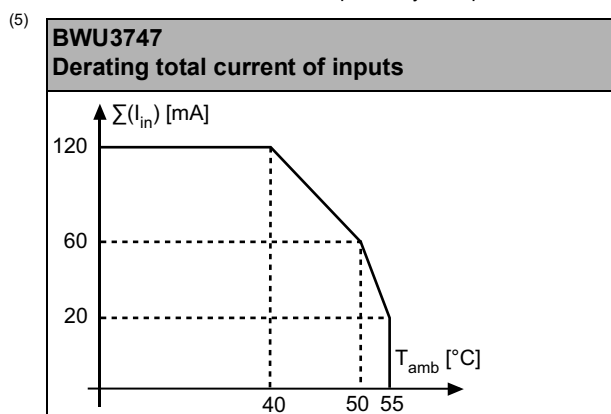

Article no.		BWU3265	BWU3266	BWU3268	BWU3267	BWU3754	
General data							
Device type		input		input / output			
Connection							
ASi / AUX Connection		COMBICON plug					
Periphery connection		COMBICON plug					
Primary application		decentralized control cabinet					
Length of connector cable		I/O: unlimited ⁽¹⁾					
ASi							
Profile		S-7.A.E, ID1=7 (default)		S-7.A.7, ID1=7 (fixed)		S-7.0.E, ID1=F (default)	
Address		1 AB address					1 single address
Required Master profile		≥M3		≥M4		≥M0	
Since ASi specification		2.1		3.0		2	
Operating voltage		30 V (18 ... 31.6 V)					
Max. current consumption		165 mA	35 mA		165 mA		
Max. current consumption without sensor/ actuator supply		45 mA	35 mA		45 mA		
AUX							
Voltage		–	24 V (18 ... 30 V)				
Max. current consumption		–	1,2 A	4,2 A	3 A		
Input							
Number		4					
Power supply		out of ASi	out of AUX		out of ASi		
Sensor supply		short-circuit and overload protected according to EN 61131-2					
power supply of attached sen- sors	up to +40 °C	120 mA ⁽²⁾	1200 mA permanent operation ⁽⁶⁾		120 mA ⁽²⁾		
	at +55 °C	90 mA ⁽²⁾	900 mA permanent operation ⁽⁶⁾		90 mA ⁽²⁾		
	at +70 °C	60 mA ⁽²⁾	600 mA permanent operation ⁽⁶⁾		60 mA ⁽²⁾		
Switching threshold		U<5 V (low) U>15 V (high)					
Output							
Number		–		4 x electronic			
Power supply		–		out of AUX			
Actuator supply		short-circuit and overload protected according to EN 61131-2					
Max. output current	up to +50 °C	–		1 A per output, ∑ (Out) 3,0 A ⁽⁸⁾			
	at +55 °C			1 A per output, ∑ (Out) 2,5 A ⁽⁸⁾			
	at +70 °C			1 A per output, ∑ (Out) 1,0 A ⁽⁸⁾			
Display							
LED ASi (green)		an: ASi voltage on, flashing: ASi voltage on, but peripheral fault ⁽³⁾ or address 0 off: no ASi Voltage					
LED FLT/FAULT (red)		an: address 0 or offline flashing: peripheral fault ⁽³⁾ off: online					
LEDs I1 ... In (yellow)		state of inputs I1 ... I4					
LEDs O1 ... On (yellow)		–		state of outputs O1 ... O4			
LED AUX (green)		–	on: 24 V _{DC} AUX off: no 24 V _{DC} AUX				

Article no.	BWU3265	BWU3266	BWU3268	BWU3267	BWU3754
Environment					
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131 EN 60529				
Can be used in passively safe paths up to SIL3/PLe	yes ⁽⁴⁾	yes ⁽⁷⁾			
Operating altitude	max. 2000 m				
Ambient temperature	-25 °C ... +55 °C (up to max. +70 °C) ⁽²⁾ ⁽⁵⁾	-25 °C ... +55 °C (up to max. +70 °C) ⁽⁵⁾ ⁽⁶⁾ ⁽⁸⁾		-25 °C ... +55 °C (up to max. +70 °C) ⁽²⁾ ⁽⁵⁾ ⁽⁸⁾	
	no condensation permitted				
Storage temperature	-25 °C ... +85 °C ⁽²⁾ ⁽³⁾				
Housing	plastic, for DIN rail mounting				
Pollution Degree	2				
Protection category	IP20				
Tolerable loading referring to humidity	according to EN 61131-2				
Voltage of insulation	≥500 V				
Weight	120 g				
Dimensions (W / H / D in mm)	22,5 / 99 / 114				


(1) Loop resistance ≤150 Ω

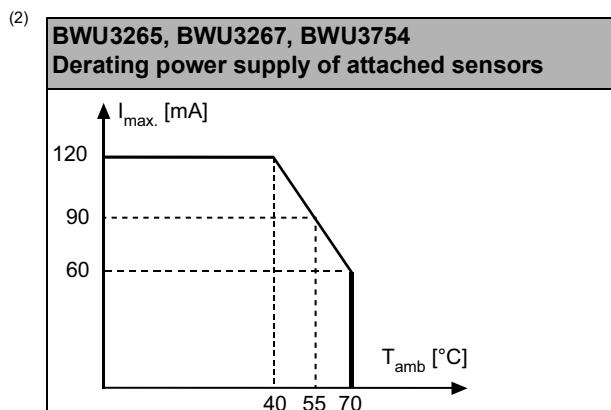

(3) see table „peripheral fault indication“


(4) The module is suitable for use in passively safe paths as it has no connection to an AUX potential.

(5) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada.

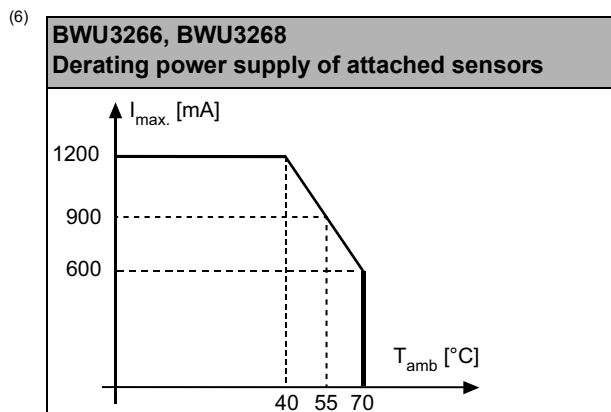

(7) BWU3266 from Ident. No. 18368; BWU3268 from Ident. No. 17368; BWU3267 from Ident. No. 17051; BWU3754 from Ident. No. 17355; the module is suitable for use in passively safe paths because an exclusion of errors can be assumed for the connection of the two potentials, ASi and AUX.

(8)

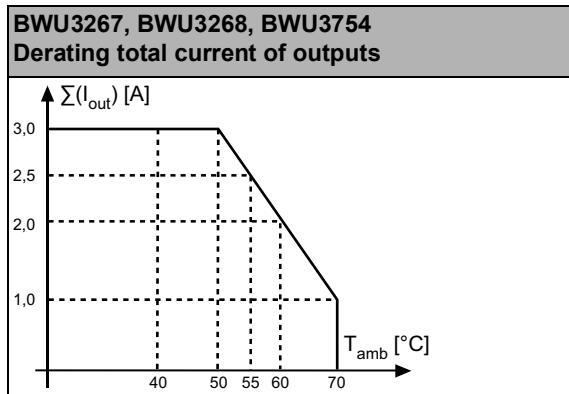


Article no.		BWU2723	BWU3842	BWU1938	BWU3559	BWU3733	BWU2759
General data							
Device type		input	inputs / output				
Connection							
ASi / AUX Connection		COMBICON plug					
Periphery connection		COMBICON plug					
Primary application		control cabinet					
Length of connector cable		I/O: unlimited ⁽¹⁾					
ASi							
Profile		S-7.A.E, ID1=7 (default)	S-7.A.7, ID1=7 (fixed)			S-7.A.0, ID1=7 (default)	S-7.0.E, ID1=F (default)
Address		1 AB address					1 single address
Required Master profile		≥M3	≥M4			≥M3	≥M0
Since ASi specification		2.1	3.0			2.1	2
Operating voltage		30 V (18 ... 31.6 V)					
Max. current consumption		35 mA					
Max. current consumption without sensor/ actuator supply		35 mA					
AUX							
Voltage		24 V (18 ... 30 V)					
Max. current consumption		1,2 A	8 A	4 A			
Input							
Number		4					
Power supply		out of AUX					
Sensor supply		short-circuit and overload protected according to EN 61131					
power supply of attached sensors	up to +40 °C	1200 mA permanent operation ⁽²⁾	< 500 mA	1200 mA permanent operation ⁽²⁾			
	at +55 °C	900 mA permanent operation ⁽²⁾		900 mA permanent operation ⁽²⁾			
	at +70 °C	600 mA permanent operation ⁽²⁾		600 mA permanent operation ⁽²⁾			
Switching threshold		U<5 V (low) U>15 V (high)					

Article no.		BWU2723	BWU3842	BWU1938	BWU3559	BWU3733	BWU2759
Output							
Number		–	4 x electronic			3 x electronic	4 x electronic
Power supply		–	out of AUX				
Actuator supply		short-circuit and overload protected according to EN 61131					
Max. output current	up to +50 °C	–	2 A per output, $\sum$ (In/Out) 8 A ⁽⁶⁾	1 A per output, $\sum$ (Out) 3,0 A ⁽⁷⁾			
	at +55 °C		2 A per output, $\sum$ (In/Out) 4 A ⁽⁶⁾	1 A per output, $\sum$ (Out) 2,5 A ⁽⁷⁾			
	at +70 °C		2 A per output, $\sum$ (In/Out) 2 A ⁽⁶⁾	1 A per output, $\sum$ (Out) 1,0 A ⁽⁷⁾			
Display							
LED ASI (green)		an: ASi voltage on, flashing: ASi voltage on, but peripheral fault ⁽³⁾ or address 0 off: no ASi Voltage					
LED FLT/FAULT (red)		an: address 0 or offline flashing: peripheral fault ⁽³⁾ off: online					
LEDs I1 ... In (yellow)		state of inputs I1 ... I4					
LEDs O1 ... On (yellow)		–	state of outputs O1 ... O4				
LED AUX (green)		on: 24 V _{DC} AUX off: no 24 V _{DC} AUX					
Environment							
Applied standards		EN 61000-6-2 EN 61000-6-3 EN 61131 EN 60529					
Can be used in passively safe paths up to SIL3/PLe		yes ⁽⁴⁾				no ⁽⁸⁾	yes ⁽⁹⁾
Operating altitude		max. 2000 m					
Ambient temperature		-25 °C ... +55 °C C (up to max. +70 °C) ⁽²⁾ ⁽⁵⁾	-25 °C ... +55 °C (up to max. +70 °C) ⁽²⁾ ⁽⁵⁾ ⁽⁶⁾ ⁽⁷⁾				
			no condensation permitted				
Storage temperature		-25 °C ... +85 °C					
Housing		plastic, for DIN rail mounting					
Pollution Degree		2					
Protection category		IP20					
Tolerable loading referring to humidity		according to EN 61131-2					
Voltage of insulation		≥500 V					
Weight		120 g					
Dimensions (W / H / D in mm)		22,5 / 99 / 114	22,5 / 99 / 92	22,5 / 99 / 114	22,5 / 99 / 92		22,5 / 99 / 114

⁽¹⁾ Loop resistance ≤150 Ω

(2) **BWU1938, BWU2723, BWU2759, BWU3559, BWU3733**
Derating power supply of attached sensors

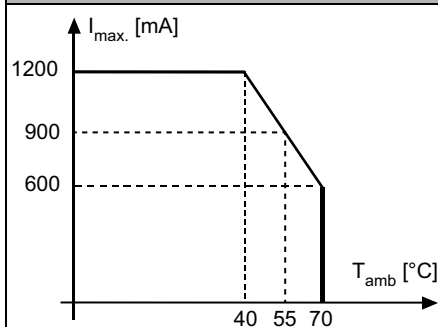


(3) see table „peripheral fault indication“


(4) BWU2723 from Ident. No. 18206; BWU3842 from Ident. No. 18488; BWU1938 from Ident. No. 18430; BWU3559 from Ident. No. 18507; the module is suitable for use in passively safe paths because an exclusion of errors can be assumed for the connection of the two potentials, ASi and AUX.

(5) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada.

(6) **BWU3842**
Derating total current of outputs

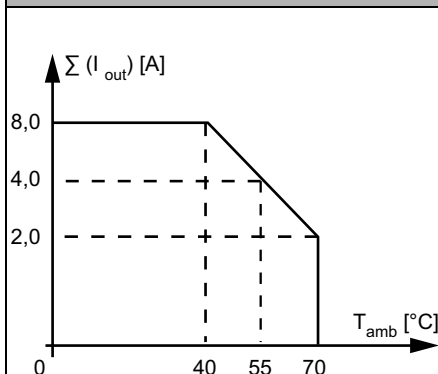

(7) **BWU1938, BWU2759, BWU3559, BWU3733**
Derating total current of outputs

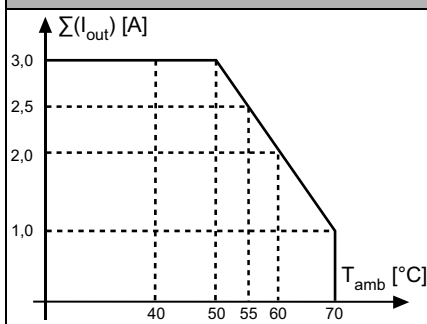

(8) The module is not suitable for use in passively safe paths because an exclusion of errors cannot be assumed for the connection of the two potentials, ASi and AUX.


(9) BWU2759 from Ident. No. 18506; the module is suitable for use in passively safe paths because an exclusion of errors can be assumed for the connection of the two potentials, ASi and AUX.


Article no.		BWU3364	BWU2490	BWU2800	BWU2721	BWU3359
General data						
Device type		input / output			input	input / output
Connection						
ASi / AUX connection		COMBICON plug				
Periphery connection		COMBICON plug				
Primary application		control cabinet				
Length of connector cable		I/O: unlimited ⁽¹⁾				
ASi						
Profile		ASi node 1: S-7.A.7, ID1=7 (fixed), ASi node 2: S-7.A.7, ID1=6 (default)	ASi node 1: S-7.0.E, ID1=F (default) ASi node 2: S-7.0.E, ID1=E (default)	ASi node 1: S-7.A.E, ID1=7 (default) ASi node 2: S-7.A.E, ID1=6 (default)	ASi node 1: S-7.A.7, ID1=7 (fixed), ASi node 2: S-7.A.7, ID1=6 (default)	
Address		2 AB addresses		2 single addresses	2 AB addresses	
Required Master profile		≥M4		≥M0	≥M3	≥M4
Since ASi specification		3.0		2.0	2.1	3.0
Operating voltage		30 V (18 ... 31.6 V)				
Max. current consumption		320 mA	60 mA			
Max. current consumption without sensor/ actuator supply		60 mA	60 mA			
AUX						
Voltage		24 V (18 ... 30 V)				
Max. current consumption		8 A			1,2 A	8 A
Input						
Number		8				8 (NPN)
Power supply		out of ASi	out of AUX			
Sensor supply		short-circuit and overload protected according to EN 61131				
Power supply of attached sensors	up to +40 °C	260 mA ⁽²⁾	900 mA permanent operation ⁽⁶⁾		1200 mA permanent operation ⁽¹⁰⁾	
	at +55 °C	130 mA ⁽²⁾	700 mA permanent operation ⁽⁶⁾		900 mA permanent operation ⁽¹⁰⁾	
	at +70 °C	–	600 mA permanent operation ⁽⁶⁾		600 mA permanent operation ⁽¹⁰⁾	
Switching threshold		U<5 V (low) U>15 V (high)				ground I+ -U<5 V (low) -U>15 V (high)
Output						
Number		8 x electronic			–	8 x electronic (NPN)
Power supply		out of AUX			–	out of AUX
Actuator supply		short-circuit and overload protected according to EN 61131				
Max. output current	up to +40 °C	1 A per output, Σ (O1 ... O4) 3 A + Σ (O5 ... O8) 3 A ⁽³⁾	1 A per output, Σ (O1 ... O4) 3 A + Σ (O5 ... O8) 3 A ⁽⁷⁾		–	0,5 A per output, Σ (Out) 4 A ⁽¹¹⁾
	at +55 °C	1 A per output, Σ (O1 ... O4) 2 A + Σ (O5 ... O8) 2 A ⁽³⁾				
	at +70 °C	–	1 A per output, Σ (O1 ... O8) 1 A ⁽⁷⁾			0,5 A per output, Σ (Out) 0,5 A ⁽¹¹⁾

Article no.	BWU3364	BWU2490	BWU2800	BWU2721	BWU3359
Display					
LED ASI/FLT 1 (red/green)	green: online red: offline yellow/red flashing: address 0				
LED ASI/FLT 2 (red/green)	green: online red: offline yellow/red flashing: address 0 red/green flashing: peripheral fault ⁽⁴⁾ red flashing: ASi node 2 is switched off, because ASi node 1 is offline				
LEDs I1 ... I8 (yellow)	state of inputs I1 ... I8				
LEDs O1 ... O8 (yellow)	state of outputs O1 ... O8			–	state of outputs O1 ... O8
LED AUX (green)	on: 24 V _{DC} AUX off: no 24 V _{DC} AUX				
Environment					
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131 EN 60529				
Can be used in passively safe paths up to SIL3/PLe	yes ⁽⁵⁾				no ⁽¹²⁾
Operating altitude	max. 2000 m				
Ambient temperature	30 °C ... +55 °C ⁽²⁾ ⁽³⁾	-30 °C ... +55 °C (up to max. +70 °C) ⁽⁶⁾ ⁽⁷⁾ ⁽⁸⁾ ⁽⁹⁾		-30 °C ... +55 °C (up to max. +70 °C) ⁽⁸⁾ ⁽¹⁰⁾ ⁽¹¹⁾	
	no condensation permitted				
Storage temperature	-25 °C ... +85 °C				
Housing	plastic, for DIN rail mounting				
Pollution Degree	2				
Protection category	IP20				
Tolerable loading referring to humidity	according to EN 61131-2				
Voltage of insulation	≥500 V				
Weight	120 g				
Dimensions (W / H / D in mm)	22,5 / 99 / 114				

(1) Loop resistance ≤150 Ω



(2)

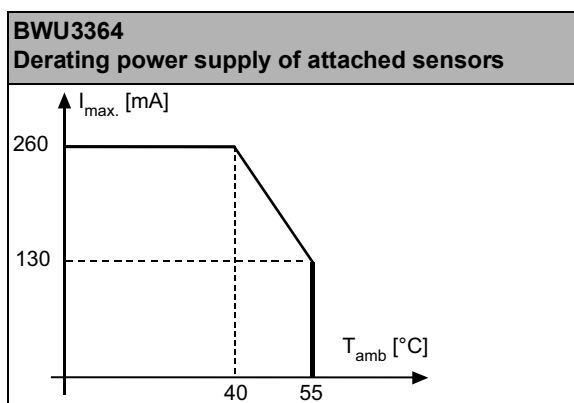

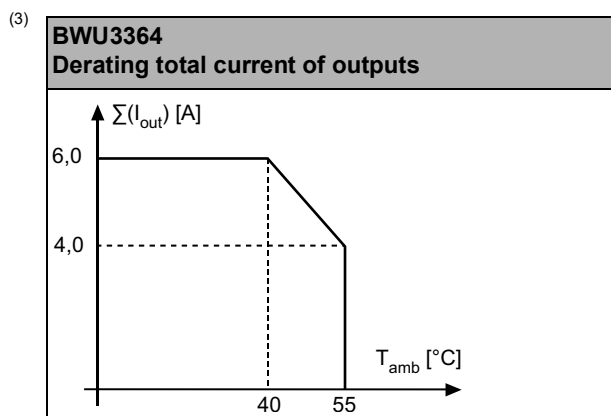

(4) see table „peripheral fault indication“


(5) BWU3364 from Ident. No. 18441; BWU2490 from Ident. No. 18307; BWU2800 from Ident. No. 18544; BWU2721 from Ident. No. 18264; the module is suitable for use in passively safe paths because an exclusion of errors can be assumed for the connection of the two potentials, ASi and AUX.

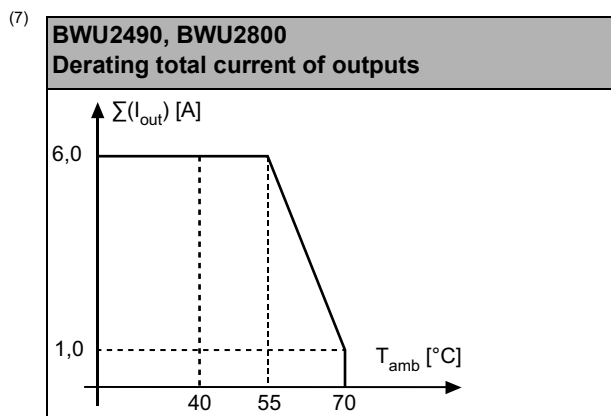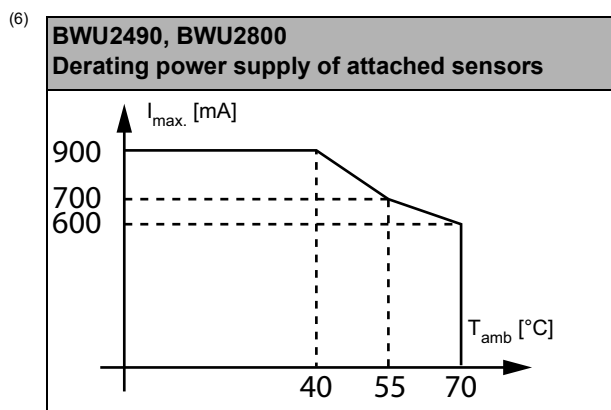


(8) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada.

(9) Temperature range up to -30°C from Ident.No. ≥16283 (BWU2490); Ident.No. ≥16299 (BWU2800).

(10)

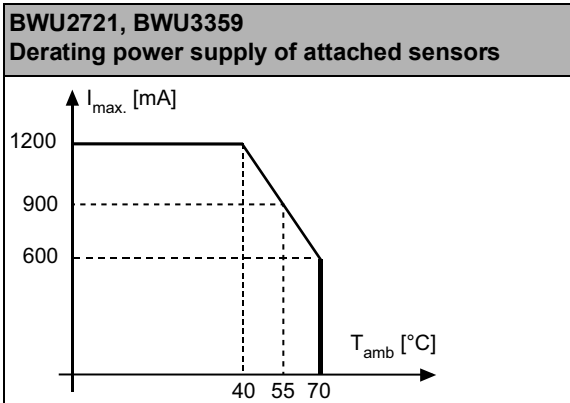

(11)

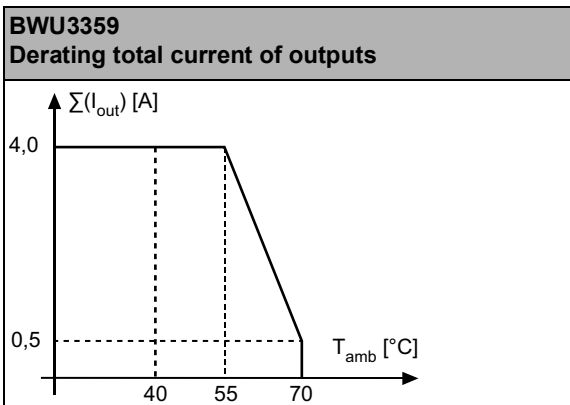


(12) The module is not suitable for use in passively safe paths because an exclusion of errors cannot be assumed for the connection of the two potentials, ASi and AUX.

Article no.		BWU3878	BWU3435	BWU3658	BWU3549
General data					
Device type		input / output			
Connection					
ASi / AUX Connection		COMBICON plug			
Periphery connection		COMBICON plug			
Primary application		control cabinet			
Length of connector cable		I/O: unlimited ⁽¹⁾			
ASi					
Profile		S-7.A.7.0	S-7.F.E, ID1=F (default)	S-7.0.E, ID1=F (default)	S-7.A.7, ID=7(fixed)
Address		1 AB address	1 single address		1 AB address
Required Master profile		≥M0			≥M4
Since ASi specification		2			3
Operating voltage		30 V (26,5 ... 31.6 V)			
Max. current consumption		200 mA			165 mA
Max. current consumption without sensor/ actuator supply		45 mA			
Input					
Number		4			
Power supply		out of ASi			
Sensor supply		short-circuit and overload protected according to EN 61131			
Power supply of attached sensors	up to +40 °C	120 mA ⁽²⁾			120 mA ⁽⁶⁾
	at +55 °C	90 mA ⁽²⁾			90 mA ⁽⁶⁾
	at +70 °C	60 mA ⁽²⁾			60 mA ⁽⁶⁾
Switching threshold		U<5 V (low) U>15 V (high)			

Article no.	BWU3878	BWU3435	BWU3658	BWU3549
Output				
Number	3 x relay outputs, normally open, 230 VAC/2A/AC-14, 30 VDC/2A/DC-13 Σ (Out) 8 A	4 x relay outputs, normally open, 230 VAC/2A/AC-14, 30 VDC/2A/DC-13 Σ (Out) 8 A		
Relay control	out of ASi			
Max. output current	–			
Display				
LED ASi (green)	an: ASi voltage on, flashing: ASi voltage on, but peripheral fault ⁽³⁾ or address 0 off: no ASi Voltage			
LED FLT/FAULT (red)	an: address 0 or offline flashing: peripheral fault ⁽³⁾ off: online			
LEDs I1 ... In (yellow)	state of inputs I1 ... I4			
LEDs O1 ... On (yellow)	state of outputs O1 ... O3	state of outputs O1 ... O4		
Environment				
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131 EN 60529			
Can be used in passively safe paths up to SIL3/PLe	yes ⁽⁴⁾			
Operating altitude	max. 2000 m			
Ambient temperature	-25 °C ... +55 °C (up to max. +70 °C) ⁽²⁾ ⁽⁵⁾			-25 °C ... +55 °C (up to max. +70 °C) ⁽⁵⁾ ⁽⁶⁾
	no condensation permitted			
Storage temperature	-25 °C ... +85 °C			
Housing	plastic, for DIN rail mounting			
Pollution Degree	2			
Protection category	IP20			
Tolerable loading referring to humidity	according to EN 61131-2			
Voltage of insulation	≥500 V			
Weight	120 g			
Dimensions (W / H / D in mm)	22,5 / 99 / 114			

(1) Loop resistance ≤150 Ω

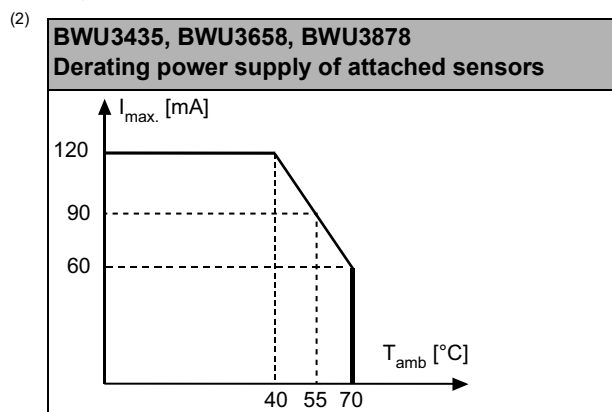


(3) see table "Peripheral fault indication"

(4) The module is suitable for use in passively safe paths as it has no connection to an AUX potential.

(5) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada.

(6)

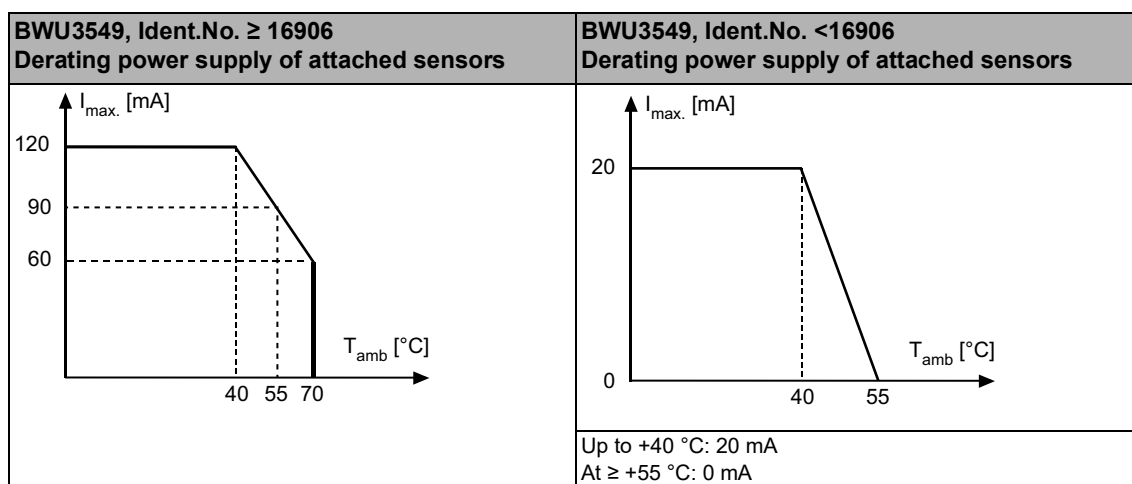

Wiring rules

	Push-in terminals
General	
Nominal cross section	2.5 mm ²
Conductor cross section	
Conductor cross section solid	0.2 ... 2.5 mm ²
Conductor cross section flexible	0.2 ... 2.5 mm ²
Conductor cross section flexible, with ferrule	without plastic sleeve: 0.2 ... 2.5 mm ² with plastic sleeve: 0.25 ... 2.5 mm ²
2 conductors with same cross section, stranded, with TWIN ferrules	without plastic sleeve: 0.5 ... 1.5 mm ²
AWG	24 ... 14
Stripped insulation length	10 mm

UL-specifications (UL508)	
External protection	An isolated source with a secondary open circuit voltage of ≤ 30 V _{DC} with a 3 A maximum over current protection. Over current protection is not required when a Class 2 source is employed.
In general	UL mark does not provide UL certification for any functional safety rating or aspects of the above devices.

Article no.	Peripheral fault indication	
	Overload sensor supply	AUX voltage missing
BWU1938	–	•
BWU2490	–	•
BWU2721	–	•
BWU2723	–	•
BWU2759	–	•
BWU2783	•	–
BWU2800	–	•
BWU3265	•	–
BWU3266	•	•
BWU3267	•	•
BWU3268	•	•
BWU3272	•	–
BWU3359	–	•

Article no.	Peripheral fault indication	
	Overload sensor supply	AUX voltage missing
BWU3364	•	•
BWU3435	•	–
BWU3549	•	–
BWU3559	–	•
BWU3658	•	–
BWU3733	–	•
BWU3747	•	–
BWU3754	•	•
BWU3842	–	•
BWU3878	•	–

Programming	Bit setting			
	D3	D2	D1	D0
	input			
BWU1938 / BWU2723 / BWU2759 / BWU2783 / BWU3265 / BWU3266 / BWU3267 / BWU3268 / BWU3272 / BWU3435 / BWU3549 / BWU3559 / BWU3658 / BWU3733 / BWU3747 / BWU3754 / BWU3842 / BWU3878	I4	I3	I2	I1
BWU2490 / BWU2721 / BWU2800 / BWU3359 / BWU3364	ASi node 1: I4	ASi node 1: I3	ASi node 1: I2	ASi node 1: I1
	ASi node 2: I8	ASi node 2: I7	ASi node 2: I6	ASi node 2: I5
	output			
BWU1938 / BWU2759 / BWU2783 / BWU3267 / BWU3268 / BWU3272 / BWU3435 / BWU3549 / BWU3559 / BWU3658 / BWU3754 / BWU3842	O4	O3	O2	O1
BWU3733, BWU3878	–	O3	O2	O1
BWU2490 / BWU2800 / BWU3359 / BWU3364	ASi node 1: O4	ASi node 1: O3	ASi node 1: O2	ASi node 1: O1
	ASi node 2: O8	ASi node 2: O7	ASi node 2: O6	ASi node 2: O5

Programming	Bit setting			
	parameter bit			
	P3	P2	P1	P0
BWU3364 / BWU2723 / BWU2721 / BWU3265 / BWU3266	not used	0 = on / 1 = off (synchronous I/O mode)	0 = on / 1 = off (data input filter 128 µs)	0 = off / 1 = on (peripheral fault, if AUX voltage missing)
BWU1938 / BWU2759 / BWU2783 / BWU3267 / BWU3268 / BWU3272 / BWU3435 / BWU3549 / BWU3559 / BWU3658 / BWU3733 / BWU3754 / BWU3842 / BWU3878				0 = off / 1 = on (watchdog)
BWU2490 / BWU2800 / BWU3359 / BWU3747				not used, watchdog always on

Connections



Name	Explanation
Ix	digital input x
Ox	digital output x
Ox3, Ox4	relay output x
I+, I-, I+n, I-n	sensor supply
O-n	GND for outputs (PNP)
O+n	GND for outputs (NPN)
AUX + _{ext.in}	power supply, out of external voltage, positive pole (AUX, actuator supply)
AUX - _{ext.in}	power supply, out of external voltage, negative pole (AUX, actuator supply)
ASi +, ASi -	connection to ASi bus
ADDR	connection for ASi addressing device
n.c. (not connected)	not connected

Connections		
BWU3265	BWU3266	BWU2723
BWU2783 / BWU3272	BWU1938 / BWU2759 / BWU3559 / BWU3842	BWU2721

Connections		
BWU3267 / BWU3268	BWU2490 / BWU2800 / BWU3364	BWU3359
BWU3733	BWU3747	
BWU3435	BWU3549	BWU3658


Connections		
BWU3754	BWU3878	

Power supply PNP

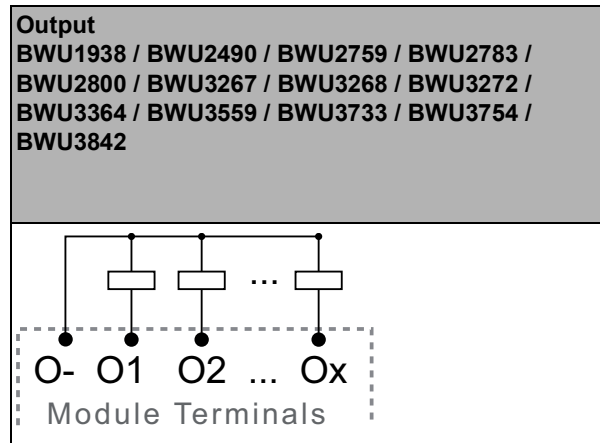
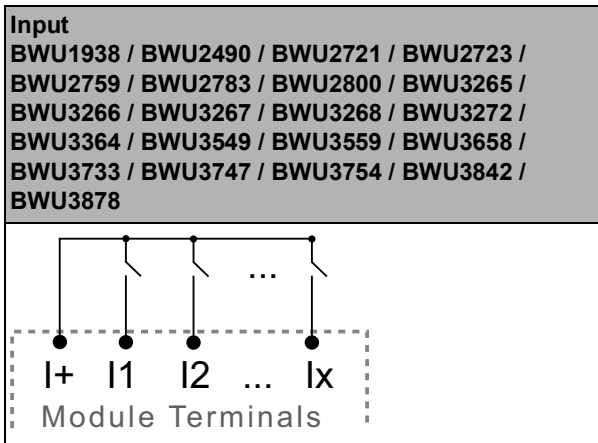


Separate power supply (recommended)



BWU1938 / BWU2490 / BWU2759 / BWU2800 / BWU3559 / BWU3733 / BWU3842

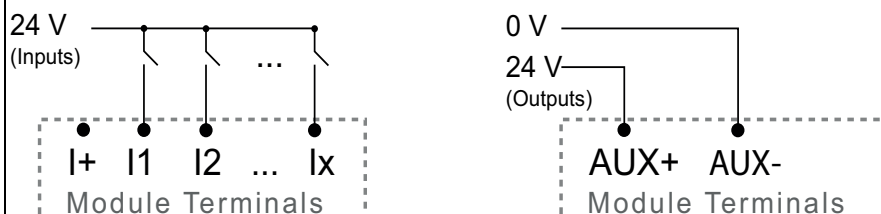

Power supply NPN

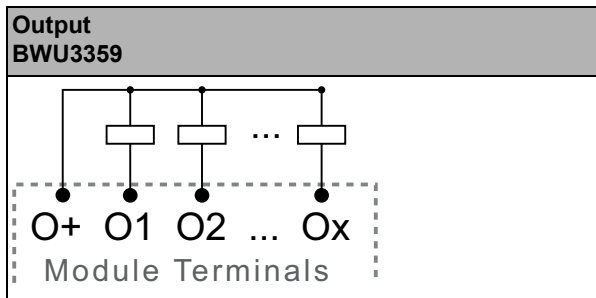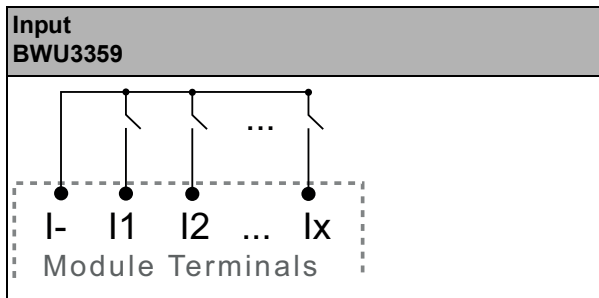

Separate power supply (recommended) BWU3359

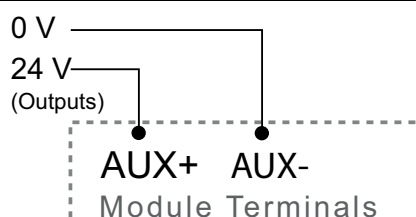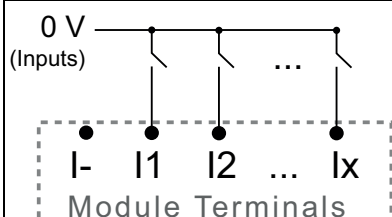

Connection relay output

