

# ITEM 076200 RIEGEL TZ-AF

Description	Technical data	Accessories	Downloads



### **Features**

- Steel bolt
- For doors hinged on the right
- Escape release
- Lever for escape release from the danger area
- Detent knob in open position
- Can be locked in open position with padlocks
- Actuator and switch bracket included

#### **Advantages**

- Robust construction
- Easily fitted to standard aluminum profiles and machine covers by screw connection
- Distinctive yellow color for easy recognition
- No additional door handle necessary

### **Special features**

- Bolt with detent mechanism
- > The bolt latches in open position to prevent unintentional closing of the bolt.


## **Mechanical values and environment**

Material	
Handle	Plastic
Guide strips	Plastic
Base plate	Galvanized steel
Switch bracket	Steel powder-coated
Weight	
Net	2,5 kg
Escape release	Yes
Number of safety switches that can be fitted	1

## **Miscellaneous**

Detent mechanism		
	Open position	Bolt detent mechanism

### **Dimension drawing**

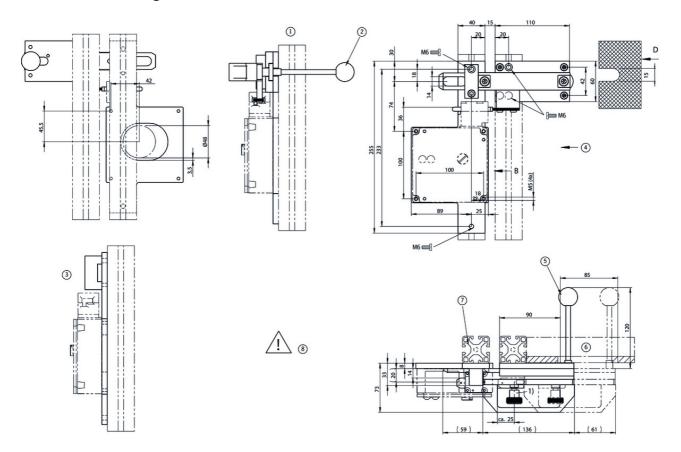

## Legende

- 7 View D
- 2 Escape release
- 3 View B
- 4 Safety switch TZ approach direction A
- 5 Included loose
- 6 Door hinged on the right
- 7 Safety guard frame 40x40
- On the actuation of the escape release for the switch, the actuator must not be subjected to a tensile load (e.g. due to strain on the doors or pulling the lever for the bolt)
- Bolt with detent mechanism: Latches in open position (Prevents unintentional closing of the bolt). Unlocked by pulling the detent knob upward.

## Spare parts

Replacement handle for EUCHNER bolts





- Material: plastic, reinforced polypropylene (PP)
- > Color: black, mat
- > Temperature resistance up to 100 °C
- > Packaging unit 5 pieces

# Function expansion

Adapter NZ/TZ 45/30



### **079033** ADAPTER NZ/TZ 45/30

- Features
  - The adapter NZ/TZ 45/30 is used to compensate for different profiles, doors/frame 45/30

#### **CAD** data

CAD data for this item on TraceParts