

**ITEM 100184 C-M12F05-05X034PV10,0-MA-100184**

Description	Technical data	Accessories	Downloads
-------------	----------------	-------------	-----------



**Features**

- › M12 female plug, 5-pin
- › Straight plug connector
- › PVC cable
- › Cable length 10 m
- › With flying lead

**Mechanical values and environment**

Sheath material	PVC
Conductor insulation material	PVC
Conductor material	Cu flexible wire bare
Fire behavior	Flame retardant according to UL-Style 2464
Drag chain suitability	No
UV resistance	Moderately UV-resistant
Ambient temperature	
	static -25 ... +80 °C
	Dynamic -5 ... +80 °C



Number of conductors	5
Type of cable	straight
Cable length	10 m
Cable diameter	Approx. 5,9 mm
Conductor cross-section	0.34 mm <sup>2</sup>
Conductor identification	Color code
Sheath color	Black
Bending radius	static 5 x cable diameter Dynamic 15 x cable diameter
<b>Connection 1</b>	
Degree of protection	IP67 [1]
Plug lock material	CuZn, nickel-plated
Insertion cycles	100
Insulating material group	1
Connection	Plug connectors M12x1
Connection type	Socket
Cable outlet	straight
Number of pins	5
Plug lock	Screw connection
Plug housing material	TPU
<b>Connection 2</b>	
Conductor end	Sheath stripped
Connection	Flying lead

### Electrical connection ratings

Nominal current	At 25° C 4 A
Rated voltage	60 V
Overtoltage category according to IEC EN 60664-1	III
Rated surge voltage according to IEC 60664-1	1500 V
Specific cable resistance	58 Ω/km
Specific inductance	0,53 mH/km
Specific capacitance	100 nF/km
<b>Connection 1</b>	
Degree of contamination according to EN 60664-1	3

[1] In the inserted state

### Dimension drawing

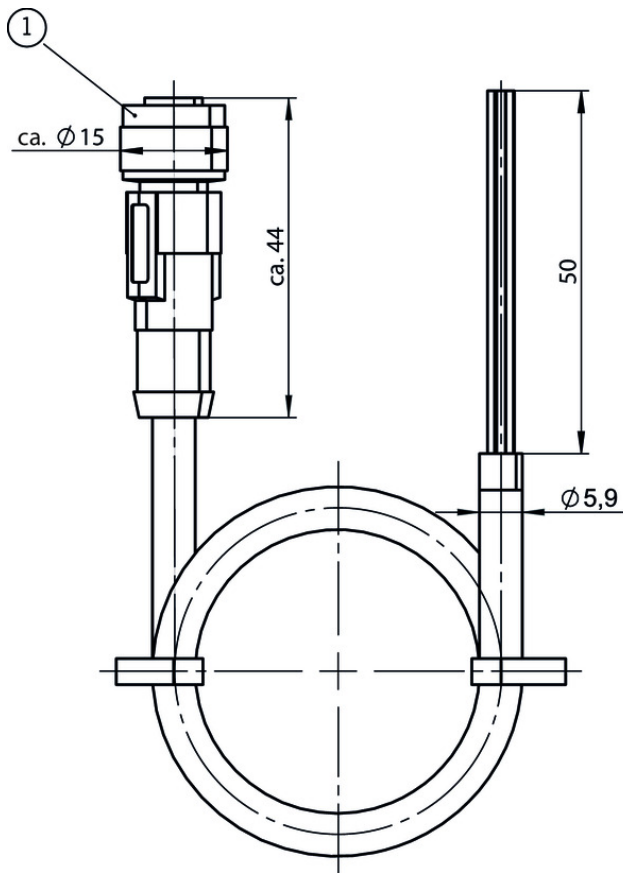

PIN 1 = BN  
PIN 2 = WH  
PIN 3 = BU  
PIN 4 = BK  
PIN 5 = GY

### Legende

- 1 Female plug M12x1, 5-pin
- 2 Terminal assignment as seen from the connection side

### Catalogs









Light grids and light curtains LCA Barreras fotoeléctricas y cortinas fotoeléctricas LCA Barrières photoélectriques et rideaux lumineux LCA Lichtgitter und Lichtvorhänge LCA

	Doc. no.	Version	Language	Download
Lichtgitter und Lichtvorhänge LCA	157084	03-03/18		2.5 MB
Barrières photoélectriques et rideaux lumineux LCA	157086	03-03/18		2.5 MB
Barreras fotoeléctricas y cortinas fotoeléctricas LCA	157087	03-03/18		2.5 MB
Light grids and light curtains LCA	157085	03-03/18		2.5 MB

- ▼ **Transpondercodierte Sicherheitsschalter - Verriegelungseinrichtungen und Zuhaltungen**  
 Transponder-coded safety switches - Interlocking devices and guard locking devices  
 Interruptores de seguridad con codificación por transponder - Dispositivos de enclavamiento y bloqueos  
 Interrupteurs de sécurité à codage par transpondeur - Dispositifs de verrouillage et interverrouillages

	<b>Doc. no.</b>	<b>Version</b>	<b>Language</b>	<b>Download</b>
Transpondercodierte Sicherheitsschalter - Verriegelungseinrichtungen und Zuhaltungen	127594	02-01/18		 5.2 MB
Interrupteurs de sécurité à codage par transpondeur - Dispositifs de verrouillage et interverrouillages	137558	02-01/18		 5.2 MB
Interruptores de seguridad con codificación por transponder - Dispositivos de enclavamiento y bloqueos	137560	02-01/18		 5.2 MB
Transponder-coded safety switches - Interlocking devices and guard locking devices	127595	02-01/18		 5.1 MB

- ▼ **Transpondercodierte Sicherheitssysteme mit externer Auswertung**  
 Transponder-coded safety systems with external evaluation  
 Sistemas de seguridad con codificación por transponder y evaluación externa  
 Systèmes de sécurité à codage par transpondeur avec analyse externe

	<b>Doc. no.</b>	<b>Version</b>	<b>Language</b>	<b>Download</b>
Transpondercodierte Sicherheitssysteme mit externer Auswertung	127596	02-01/18		 3.1 MB
Systèmes de sécurité à codage par transpondeur avec analyse externe	137968	02-01/18		 3.0 MB
Sistemas de seguridad con codificación por transponder y evaluación externa	139969	02-01/18		 3.0 MB
Transponder-coded safety systems with external evaluation	127597	02-01/18		 3.0 MB