

OF510141

OPTICAL SENSORS • COLOR SENSORS

The functioning of the color sensors is based on the evaluation of the red, green and blue components of the light reflected by the objects to be measured, or from the emitted radiation of the 'self-luminous' object (for example, LEDs, automobile tail lights, halogen lamps, fluorescent lamps, etc.). For this purpose, a so-called 3-fold receiver is integrated in the unit next to an on / off switchable white light or UV-light. This receiver works according to the True Color principle. This means that the evaluation of the light hitting the receiver is similar to the color perception of the human eye. This is a prerequisite for the reliable differentiation of objects or luminous objects by their color and brightness. For testing fluorescent materials the use of sensors with UV-light source is recommended. The use under adverse environmental conditions is possible through the use of additional fiber optics. The interaction between a precise detection and a high switching frequency distinguishes the devices. Thus, they are an ideal tool for process and quality control.



MECHANICAL DATA

| | |
|--------------------------------|------------------|
| Ambient temperature | -20 °C ... 55 °C |
| Degree of protection (IP) | IP64 |
| For damp environments | Yes |
| For glossy/reflecting surfaces | Yes |
| Housing coating | Anodised |
| Housing design | Cuboid |
| Housing material | Aluminium |
| Sensor height | 27 mm |
| Sensor length | 50 mm |
| Sensor width | 50 mm |
| Storage temperature | 85 °C |
| Storage temperature | -20 °C |
| With fiber optics connection | No |

ELECTRICAL DATA

| | |
|--|--------------------|
| Control of self-luminous objects | Yes |
| EMC test in acc. with | DIN EN 60947-5-2 |
| Equipment protection class | Protection class 3 |
| Max. number of measurements for averaging | 32768 |
| Max. output current | 100 mA |
| Measurement frequency in alternating light operation | 20000 Hz |
| Measurement frequency in constant light operation | 35000 Hz |
| No-load current | 160 mA |
| Number of digital inputs | 1 |
| Number of pins | 8 |
| Number of pins of the communication interface | 4 |
| Number of switching outputs | 5 |


ELECTRICAL DATA

| | |
|--|---|
| Operating voltage | 21.6 V ... 26.4 V |
| Overload protection | Yes |
| Polarizing filter | Yes |
| Pulse stretching | 100 ms |
| Rated control supply voltage U_s at DC | 21.6 V ... 26.4 V |
| Relative repeat accuracy | 0.02 % |
| Reverse polarity protection | Yes |
| Selectable amplifier stages | 8 |
| Sensing range | 5 mm ... 50 mm |
| Setting procedure | Parameterization |
| Short-circuit-proof | Yes |
| Standard for interfaces | RS-232 |
| Switching frequency | 35000 Hz |
| Temperature drift | $\Delta X/\Delta T$; $\Delta Y/\Delta T$ typ. 0.2 digits/°C (< 0.01% / °C) |
| Type of communication interface | Connector M5 |
| Type of electrical connection | Connector M12 |
| Type of plug-in contact, communication interface | Female (socket) |
| Type of switching function | Push-pull |
| Type of switching output | PNP/NPN |
| Voltage type | DC |
| With communication interface, RS-232 | Yes |
| With external teach | Yes |
| With external trigger | Yes |
| With time function | Yes |

OPTICAL DATA

| | |
|--------------------------------------|---------------------------|
| Alternating light operation | Yes |
| Color distance | $\Delta E \geq 0.5$ |
| Color spaces | X Y INT siM (Lab) |
| Constant light operation | Yes |
| Light source | White light |
| Max. ambient light | 5000 lx |
| Measuring method for color detection | Active tristimulus method |
| True color | Yes |

CONNECTION

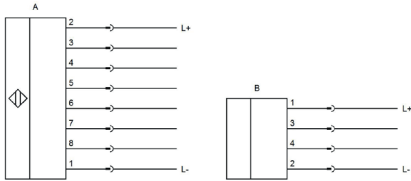


Colors: A: M12: 1 = WH (white), 2 = BN (brown), 3 = GN (green), 4 = YE (yellow), 5 = GY (gray), 6 = PK (pink), 7 = BU (blue), 8 = RD (red)

Functions: A: M12: 1 = L-, 2 = L+, 3 = in 0, 4 = out 0, 5 = out 1, 6 = out 2, 7 = out 3, 8 = out 4

B: M5: 1 = L+, 2 = L-, 3 = RxD, 4 = TxD

DIMENSIONAL DRAWING

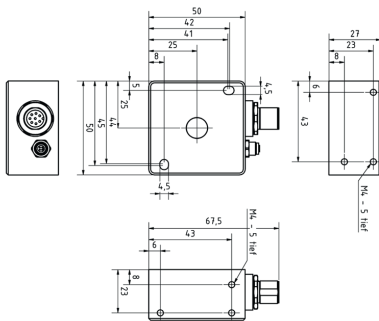

INSTALLATION



Mounting / Installation may only be carried out by a qualified electrician!

DISPOSAL



SAFETY WARNINGS

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!