

## ITEM 091467 23POL/10M/METALLAUSFUEHRUNG

Description	Technical data	Accessories	Downloads
-------------	----------------	-------------	-----------



### Features

- › Extension cable
- › Flange plug connector with socket contacts, 23-pin
- › Plug connector with male contacts, 23-pin
- › Bayonet plug lock
- › PUR cable
- › Cable length 10 m, straight

### Mechanical values and environment

Sheath material	PUR
Drag chain suitability	No
Ambient temperature	
Dynamic	-10 ... +70 °C
static	-40 ... +80 °C
Number of conductors	23
Type of cable	straight
Cable length	10 m


Cable diameter	8,5 mm
Conductor cross-section	6 x 0.34 mm <sup>2</sup> + 17 x 0.14 mm <sup>2</sup>
Bending radius	
static	≥ 10 x cable diameter
Dynamic	≥ 15 x cable diameter
Interlocking	
Flange plug connector/plug connector	Bayonet
	<b>Connection 1</b>
Degree of protection	IP 67 [1]
Designation of plug connector	UT00
Connection	Flange plug connector
Connection type	Socket contacts
Cable outlet	straight
Number of pins	23
Plug lock	Bayonet
	<b>Connection 2</b>
Degree of protection	IP 67 [2]
Designation of plug connector	UT06
Connection	Plug connector
Connection type	Male contact
Cable outlet	straight
Number of pins	23
Plug lock	Bayonet

### Electrical connection ratings

Cable shielding	Yes
-----------------	-----

[1, 2] In the inserted state

### Dimension drawing

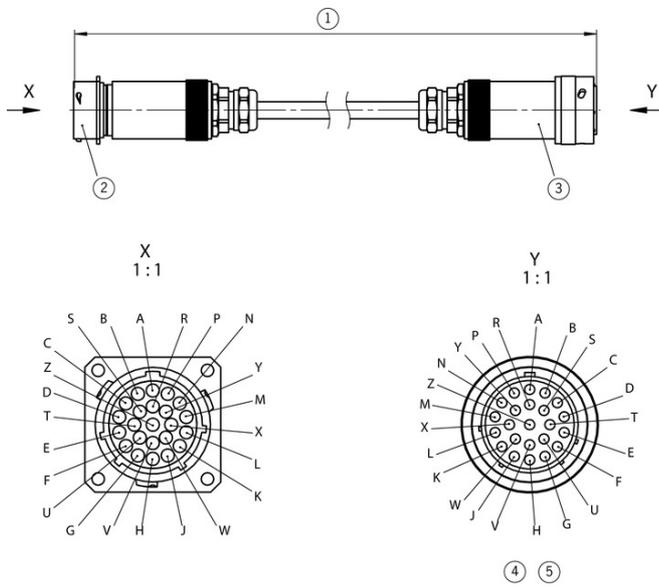

**Steckerbelegung:**

⑥

Kontakt Pin ⑦	Querschnitt mm <sup>2</sup> ⑧	Adernfarbe ⑨
A	0,34	WH
B	0,34	BN
C	0,14	GN
D	0,14	YE
E	0,14	GY
F	0,14	PK
G	0,34	BU
H	0,34	RD
J	0,34	BK
K	0,34	VT
L	0,14	GYPK
M	0,14	RDBU

**Steckerbelegung:**

⑥

Kontakt Pin ⑦	Querschnitt mm <sup>2</sup> ⑧	Adernfarbe ⑨
A	0,34	WH
B	0,34	BN
C	0,14	GN
D	0,14	YE
E	0,14	GY
F	0,14	PK
G	0,34	BU
H	0,34	RD
J	0,34	BK
K	0,34	VT
L	0,14	GYPK
M	0,14	RDBU

## Legende

- 1 Cable length
- 2 Flange plug connector with socket contacts
- 3 Plug connector with male contacts
- 4 Wires: 6x0.34mm<sup>2</sup>, 17x0.14 mm<sup>2</sup> outer screen connected to plug housing
- 5 Plug connector: Number of pins 23, metal housing
- 6 Connector assignment:
- 7 Contact pin
- 8 Cross-section mm<sup>2</sup>
- 9 Conductor coloring