

## ORQ80170

### OPTICAL SENSORS • RETRO-REFLECTIVE SENSORS

Optical sensors function contactlessly. They detect objects independent of their characteristics (e.g., shape, color, surface structure, material). The basic operating principle is based on the transmission and reception of light. There are three different versions: 1. The through-beam sensor consists of two separate devices, a transmitter and a receiver that are aligned with one another. If the light beam between the two devices is interrupted, the switching output integrated in the receiver changes its status. 2. With the retro-reflective sensor, the transmitter and receiver are located in one device. The emitted light beam is reflected back to the receiver by a reflector that is to be mounted opposite the device. As soon as the light beam is interrupted, the switching output integrated in the device changes its status. 3. With the diffuse reflection sensor, the transmitter and receiver are in one device. The emitted light beam is reflected by the object that is to be detected. As soon as the receiver detects the reflected light, the switching output integrated in the device changes its status.



#### MECHANICAL DATA

Ambient temperature	-25 °C ... 55 °C
Cable length	0.3 m
Degree of protection (IP)	IP67
Housing design	Cuboid
Housing material	Plastic ABS
Reflector included in the scope of delivery	Yes
Sensor height	22 mm
Sensor length	12.3 mm
Sensor width	8.2 mm
Shock resistance	50 g
Storage temperature	70 °C
Storage temperature	30 °C

#### ELECTRICAL DATA

Alarm output	Yes
Decay time	0.5 ms
IO-Link compatible	No
Max. output current	50 mA
Max. switching distance	200 mm
No-load current	20 mA
Operating voltage	12 V ... 24 V
Rated control supply voltage $U_s$ at DC	12 V ... 24 V
Rated switching distance	200 mm
Relative repeat accuracy	0.5 mm
Residual ripple	10 %
Response time	0.5 ms
Reverse polarity protection	Yes


## ELECTRICAL DATA

Scanning function	Dark switching
Setting procedure	Manual adjustment
Short-circuit-proof	Yes
Switching frequency	1000 Hz
Type of alarm output	PNP
Type of electrical connection	Cable connector M8
Type of input voltage	DC
Type of switching function	Normally open contact (NO)
Type of switching output	PNP
Voltage drop	1 V
Voltage type	DC
With communication interface, analog	No
With communication interface, AS-Interface	No
With communication interface, CANOpen	No
With communication interface, DeviceNet	No
With communication interface, Ethernet	No
With communication interface, INTERBUS	No
With communication interface, PROFIBUS	No
With communication interface, RS-232	No
With communication interface, RS-422	No
With communication interface, RS-485	No
With communication interface, SSD	No
With communication interface, SSI	No
With LED display	Yes
With polarizing filter	Yes
With time function	No

## OPTICAL DATA

Light beam form	Point
Light source	Polarity free red light
Min. object size	15 mm
Min. reflector distance	30 mm
Wavelength of the sensor	680 nm

## CONNECTION

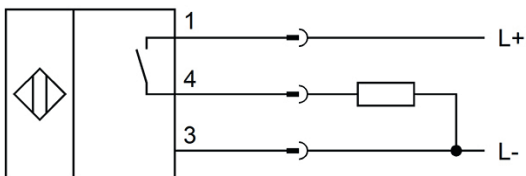

**Colors:** 1 = BN (brown), 3 = BU (blue), 4 = BK (black)

**Functions:** 1 = L+, 3 = L-, 4 = PNP NO

## DIMENSIONAL DRAWING

## INSTALLATION



Mounting / Installation may only be carried out by a qualified electrician!

## DISPOSAL



## SAFETY WARNINGS

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!