

OS080070

OPTICAL SENSORS • THROUGH-BEAM SENSORS TRANSMITTERS

Optical sensors function contactlessly. They detect objects independent of their characteristics (e.g., shape, color, surface structure, material). The basic operating principle is based on the transmission and reception of light. There are three different versions: 1. The through-beam sensor consists of two separate devices, a transmitter and a receiver that are aligned with one another. If the light beam between the two devices is interrupted, the switching output integrated in the receiver changes its status. 2. With the retro-reflective sensor, the transmitter and receiver are located in one device. The emitted light beam is reflected back to the receiver by a reflector that is to be mounted opposite the device. As soon as the light beam is interrupted, the switching output integrated in the device changes its status. 3. With the diffuse reflection sensor, the transmitter and receiver are in one device. The emitted light beam is reflected by the object that is to be detected. As soon as the receiver detects the reflected light, the switching output integrated in the device changes its status.



MECHANICAL DATA

| | |
|-----------------------------|------------------------|
| Ambient temperature | -25 °C ... 65 °C |
| Cable length | 2 m |
| Degree of protection (IP) | IP65 |
| Housing coating | Nickel-plated |
| Housing design | Cylinder, screw-thread |
| Housing material | Brass |
| Material of optical surface | Plastic PC |
| Number of wires | 3 |
| Sensor length | 75 mm |
| Thread length | 55 mm |
| Thread pitch | 0.75 mm |
| Thread size, metric | 8 |

ELECTRICAL DATA

| | |
|-------------------------------|---------------|
| IO-Link compatible | No |
| Measuring range | 2.5 m |
| No-load current | 48 mA |
| No-load current, transmitter | 48 mA |
| Operating voltage | 10 V ... 30 V |
| Rated switching distance | 2500 mm |
| Reverse polarity protection | Yes |
| Type of electrical connection | Connector M8 |
| Type of input voltage | DC |
| Voltage type | DC |
| With time function | No |

OPTICAL DATA

| | |
|-----------------|-------|
| Light beam form | Point |
|-----------------|-------|

OPTICAL DATA

Light source

Infrared light

Wavelength of the sensor


880 nm

OTHER DATA


Scope of delivery of the one-way system

Transmitter

CONNECTION

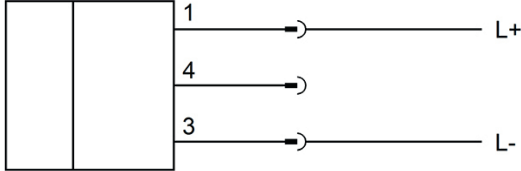

DIMENSIONAL DRAWING

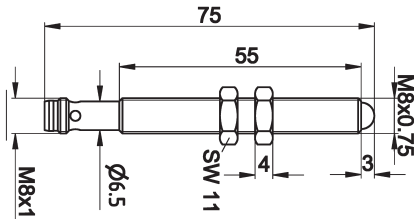

INSTALLATION



Mounting / Installation may only be carried out by a qualified electrician!

DISPOSAL



SAFETY WARNINGS

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!