

OT080100

OPTICAL SENSORS • DIFFUSE REFLECTION SENSORS WITH INTENSITY DIFFERENCIATION

Optical sensors function contactlessly. They detect objects independent of their characteristics (e.g., shape, color, surface structure, material). The basic operating principle is based on the transmission and reception of light. There are three different versions: 1. The through-beam sensor consists of two separate devices, a transmitter and a receiver that are aligned with one another. If the light beam between the two devices is interrupted, the switching output integrated in the receiver changes its status. 2. With the retro-reflective sensor, the transmitter and receiver are located in one device. The emitted light beam is reflected back to the receiver by a reflector that is to be mounted opposite the device. As soon as the light beam is interrupted, the switching output integrated in the device changes its status. 3. With the diffuse reflection sensor, the transmitter and receiver are in one device. The emitted light beam is reflected by the object that is to be detected. As soon as the receiver detects the reflected light, the switching output integrated in the device changes its status.



MECHANICAL DATA

| | |
|---|------------------------|
| Ambient temperature | -25 °C ... 65 °C |
| Cable length | 2 m |
| Degree of protection (IP) | IP65 |
| Housing coating | Nickel-plated |
| Housing design | Cylinder, screw-thread |
| Housing material | Brass |
| Material of cable sheath | PVC |
| Material of optical surface | PC |
| Number of wires | 3 |
| Reflector included in the scope of delivery | No |
| Sensor length | 56 mm |
| Thread length | 48 mm |
| Thread pitch | 0.75 mm |
| Thread size, metric | 8 |
| Wire cross section | 0.14 mm ² |
| With interchangeable lens | No |

ELECTRICAL DATA

| | |
|-----------------------------|--------------------|
| Alarm output | No |
| Decay time | 1 ms |
| Equipment protection class | Protection class 3 |
| High repeat accuracy | No |
| Interference suppression | Yes |
| Max. output current | 100 mA |
| Max. switching distance | 40 mm |
| No-load current | 42 mA |
| Number of switching outputs | 1 |

ELECTRICAL DATA

| | |
|--|----------------------------|
| Operating voltage | 10 V ... 30 V |
| Pre-failure message | No |
| Response time | 1 ms |
| Reverse polarity protection | Yes |
| Scanning function | Light switching |
| Sensing range | 5 mm ... 40 mm |
| Short-circuit-proof | Yes |
| Suitable for safety functions | No |
| Switching frequency | 500 Hz |
| Type of electrical connection | Cable |
| Type of switching function | Normally open contact (NO) |
| Type of switching output | PNP |
| Voltage drop | 2 V |
| Voltage type | DC |
| With communication interface, RS-232 | No |
| With LED display | Yes |
| With monitoring function of downstream devices | No |
| With other analog output | No |
| With restart lock | No |
| With time function | No |

OPTICAL DATA

| | |
|---------------------------|----------------|
| Light beam form | Point |
| Light exit | IV000197 |
| Light source | Infrared light |
| Line scanner | No |
| Small light beam diameter | No |
| Wavelength of the sensor | 880 nm |

OTHER DATA

| | |
|--------------------|-----|
| | No |
| | No |
| Feeding technology | Yes |


CONNECTION



Colors: BN (brown), BU (blue), BK (black)

Functions: BN = L+, BU = L-, BK = PNP NO

DIMENSIONAL DRAWING

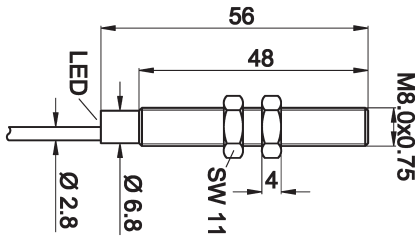

INSTALLATION



Mounting / Installation may only be carried out by a qualified electrician!

DISPOSAL



SAFETY WARNINGS

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!