

Features

- 1-channel signal conditioner
- 24 V DC supply (loop powered)
- Thermocouple input
- Output 4 mA ... 20 mA
- Internal cold junction compensation
- Sensor breakage detection
- DIP switch selectable ranges


Function

This isolated signal conditioner is a loop-powered isolator that converts thermocouple inputs to a 4 mA ... 20 mA signal and provides isolation for non-intrinsically safe applications.


The internal cold junction compensation can be bypassed by using terminals 1 and 3.

The output current is linear to input voltage, not proportional to temperature. Zero, span, and burnout detection are field-configurable.

Assembly

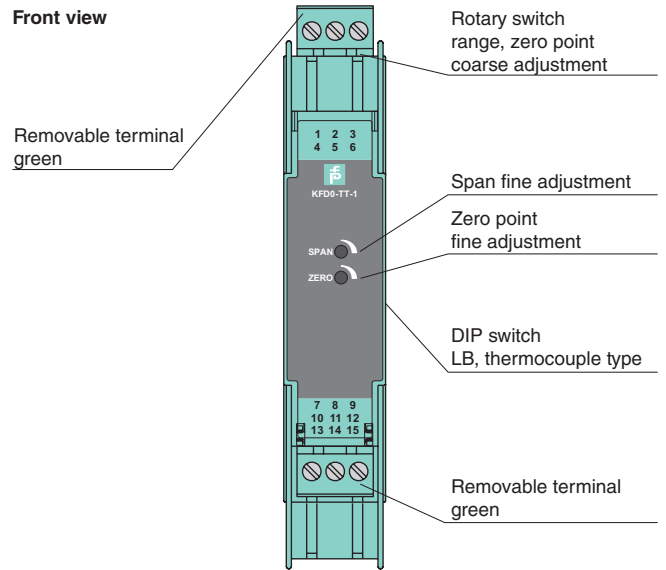

Connection

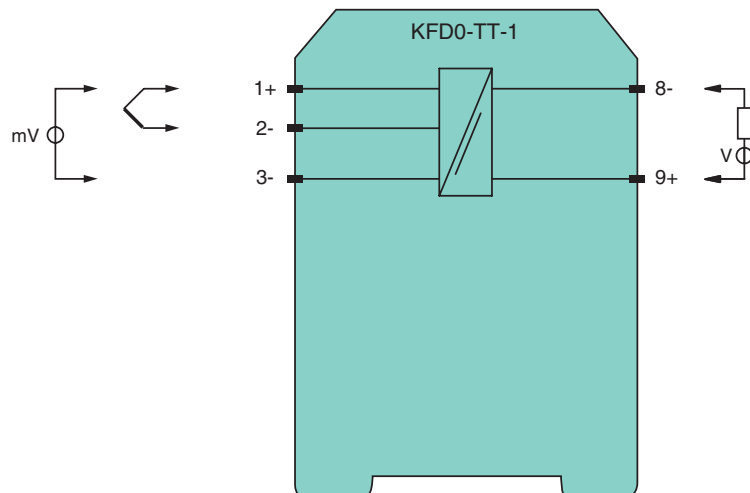

Release date 2019-01-14 10:15 Date of issue 2019-01-16 038308_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

General specifications		
Signal type		Analog input
Supply		
Rated voltage	U_r	12 ... 35 V DC loop powered
Power dissipation		0.4 W
Input		
Connection side		field side
Connection		terminals 1+, 2-, 3- thermocouples type E, J, K, N, R, S or T cold junction referenced to 0 °C (32 °F)
Lead resistance		≤ 100 Ω per line
Current		lead monitoring ON: ≤ 15 nA; OFF: ≤ 1 nA
Output		
Connection side		control side
Connection		terminals 9+, 8-
Load		(U -12 V) / 0.02 A
Current output		4 ... 20 mA , limited to ≤ 35 mA
Fault signal		downscaling ≤ 3 mA , upscaling ≥ 22 mA
Transfer characteristics		
Measurement range	f_n	span 4 ... 100 mV, zero point -12 ... 60 mV , both adjustable
Deviation		
After calibration		0.1 % of full-scale value ± 1 K for the cold junction
Temperature effect		temperature deviation 0.015 % of the span/K or 1.5 μV/K cold junction ± 2 K (calibrated at $T_{amb} = 20 °C (68 °F)$)
Influence of supply voltage		6.5 ppm/V
Characteristic curve		the output voltage is linearly proportionate to the input voltage (not to temperature)
Rise time		250 ms
Galvanic isolation		
Input/Output		safe isolation according to EN 50178, rated insulation voltage 253 V _{eff}
Indicators/settings		
Control elements		DIP-switch rotary switch
Configuration		via DIP switches via rotary switch
Labeling		space for labeling at the front
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Conformity		
Insulation coordination		EN 50178
Galvanic isolation		EN 50178
Degree of protection		IEC 60529
Ambient conditions		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
Mechanical specifications		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 150 g
Dimensions		20 x 119 x 115 mm (0.8 x 4.7 x 4.5 inch) , housing type B2
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
General information		
Supplementary information		Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .

Release date 2019-01-14 10:15 Date of issue 2019-01-16 038308_eng.xml

Configuration

DIP switches function

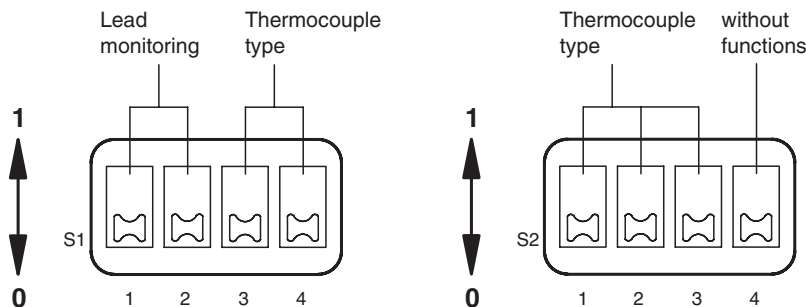


Switch	Position	Function
S1.1/S1.2	1/0	LB UP-upscaled
S1.1/S1.2	0/1	LB DOWN-downscaled
S1.3	1	Thermocouple type E
S1.4	1	Thermocouple type J
S2.1	1	Thermocouple type K, T
S2.2	1	Thermocouple type N
S2.3	1	Thermocouple type R, S

} *

* other combinations not allowed/defined

Note: A new adjustment is necessary in the case of modified configuration (e. g. LB from upscaled to downscaled).

Rotary switches function



Please consider that the values of the Zero-table are only valid for the span range Pos. 0 and that both tables contain typical values, which can be used as an adjustment help.

Switch SPAN coarse adjustment	Span (mV)	Switch ZERO coarse adjustment	Zero point (mV) for max. span (potentiometer right-hand stop)	Zero point (mV) for min. span (potentiometer left-hand stop)
0	100.0 ... 53.0	0	-12.0 ... -8.0	-13.6 ... -8.5
1	55.0 ... 30.0	1	-8.3 ... -3.7	-9.0 ... -4.0
2	32.0 ... 20.0	2	-4.0 ... 1.0	-4.3 ... 1.1
3	22.0 ... 5.0	3	0.5 ... 5.6	0.5 ... 6.1
4	17.0 ... 12.0	4	4.6 ... 10.2	5.2 ... 11.2
5	14.0 ... 11.0	5	9.3 ... 14.9	10.2 ... 16.2
6	13.0 ... 9.0	6	13.9 ... 19.5	15.2 ... 21.1
7	11.0 ... 8.0	7	18.3 ... 23.9	20.1 ... 25.6
8	10.0 ... 7.0	8	23.0 ... 28.6	24.7 ... 31.0
9	9.0 ... 6.0	9	27.6 ... 33.1	30.0 ... 36.0
A	8.0 ... 5.5	A	32.1 ... 37.6	35.0 ... 40.5
B	7.5 ... 5.0	B	36.6 ... 42.1	39.4 ... 46.0
C	7.0 ... 4.5	C	41.1 ... 46.6	45.1 ... 51.0
D	6.5 ... 4.2	D	45.5 ... 51.0	50.1 ... 56.0
E	6.2 ... 4.1	E	50.0 ... 55.5	55.0 ... 61.0
F	6.1 ... 4.0	F	54.4 ... 60.0	60.0 ... 62.0

Recommendation for adjustment:

1. Span determination (in mV).
2. "Span coarse adjustment" in accordance with the table.
3. Minimum value adjustment (in mV or °C) at the input.
4. "Zero point coarse adjustment", to approach to 4 mA.
5. "Zero point fine adjustment" to exactly 4 mA.
6. Maximum value adjustment (in mV or °C) at the input.
7. "Span fine adjustment" to exactly 20 mA.
8. If necessary repeat fine adjustment for 4 mA and 20 mA.

Release date 2019-01-14 10:15 Date of issue 2019-01-16 038308_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".