

**Features**

- 1-channel
- DC version, positive polarity
- Working voltage 26.5 V at 10  $\mu$ A
- Series resistance max. 250  $\Omega$
- Fuse rating 80 mA
- DIN rail mounting
- High power version


**Function**

The Zener Barrier prevents the transfer of unacceptably high energy from the safe area into the hazardous area.



The zener diodes in the Zener Barrier are connected in the reverse direction. The breakdown voltage of the diodes is not exceeded in normal operation. If this voltage is exceeded, due to a fault in the safe area, the diodes start to conduct, causing the fuse to blow. The Zener Barrier has a positive polarity, i. e. the anodes of the zener diodes are grounded.

This high power version has a smaller serial resistance and therefore provides higher voltage to the field device.

**Assembly**

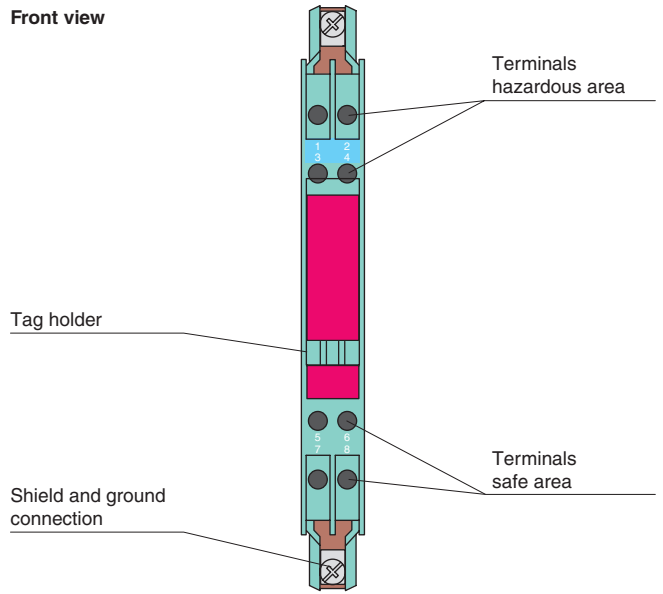

**Connection**

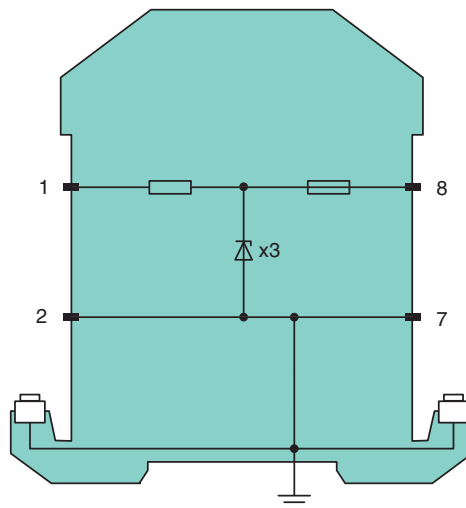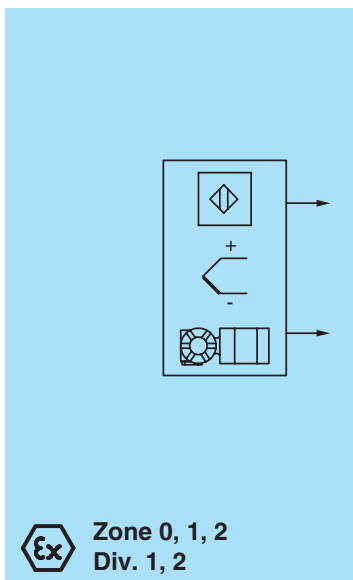

Zone 2  
Div. 2

Release date 2018-04-09 08:45 Date of issue 2018-04-09 07:1938\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

<b>General specifications</b>		
Type	DC version, positive polarity	
<b>Electrical specifications</b>		
Nominal resistance	240 Ω	
Series resistance	≤ 250 Ω	
Fuse rating	80 mA	
<b>Hazardous area connection</b>		
Connection	terminals 1, 2	
<b>Safe area connection</b>		
Connection	terminals 7, 8	
<b>Working voltage</b>		
Supply loop	≤ 26.9 V	
Measurement loop	≤ 26.5 V at 10 μA	
<b>Conformity</b>		
Degree of protection	IEC 60529	
<b>Ambient conditions</b>		
Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)	
Storage temperature	-25 ... 70 °C (-13 ... 158 °F)	
Relative humidity	max. 75 % , without condensation	
<b>Mechanical specifications</b>		
Degree of protection	IP20	
Connection	screw terminals	
Core cross-section	max. 2 x 2.5 ... mm <sup>2</sup>	
Mass	approx. 150 g	
Dimensions	12.5 x 115 x 110 mm (0.5 x 4.5 x 4.3 inch)	
Construction type	modular terminal housing , see system description	
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001	
<b>Data for application in connection with hazardous areas</b>		
EU-Type Examination Certificate	BAS 01 ATEX 7005	
Marking	⊕ II (1)GD, I (M1) [Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I (-20 °C ≤ T <sub>amb</sub> ≤ 60 °C) [circuit(s) in zone 0/1/2]	
Voltage U <sub>o</sub>	28 V	
Current I <sub>o</sub>	120 mA	
Power P <sub>o</sub>	830 mW	
<b>Supply</b>		
Maximum safe voltage U <sub>m</sub>	250 V	
Series resistance	min. 235 Ω	
<b>Permissible connection values [EEx ia]</b>		
Certificate	TÜV 99 ATEX 1484 X	
Marking	⊕ II 3G Ex nA IIC T4 Gc [device in zone 2]	
<b>Directive conformity</b>		
Directive 2014/34/EU	EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-15:2010	
<b>International approvals</b>		
<b>FM approval</b>		
Control drawing	116-0118	
<b>UL approval</b>		
Control drawing	116-0139	
<b>CSA approval</b>		
Control drawing	116-0119	
<b>IECEX approval</b>		
	IECEX BAS 09.0142 IECEX BAS 17.0091X	
Approved for	[Ex ia Ga] IIC , [Ex ia Da] IIIC , [Ex ia Ma] I Ex ec IIC T4 Gc	
<b>General information</b>		
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .	

Release date 2018-04-09 08:45 Date of issue 2018-04-09 07:1938\_eng.xml