



Model Number


IQH1-F61-V1

HF read/write head, ISO 15693, for IDENTControl


Features

- Operating frequency 13.56 MHz
- Conforms to ISO 15693
- Suitable for FRAM transponder
- Particularly flat construction
- Connection cable with V1 plug (M12 x 1)
- Degree of protection IP67
- Can be mounted on metal
- For connection to IDENTControl control interface

Dimensions

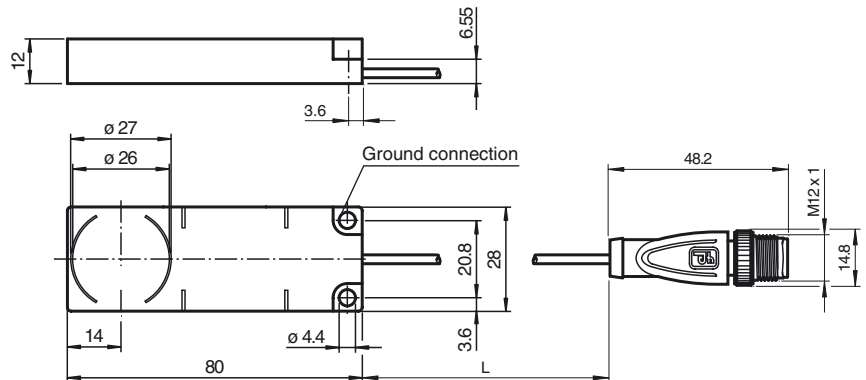

Electrical connection

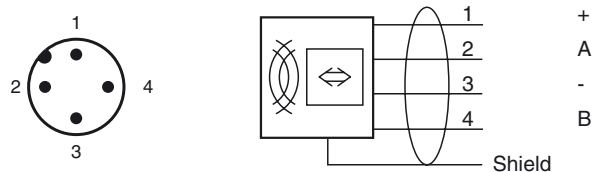

Technical data

General specifications

| | |
|---------------------|-------------|
| Operating frequency | 13.56 MHz |
| Transfer rate | 26 kBit/s |
| Sensing range | |
| Read distance | 0 ... 55 mm |
| Write distance | 0 ... 55 mm |
| Width | max. 45 mm |
| UL File Number | E87056 |

Electrical specifications

| | | |
|-------------------|-----------------------|--------------|
| Power consumption | P_0 | ≤ 1.3 W |
| Supply | from the IDENTControl | |

Ambient conditions

| | |
|---------------------|--------------------------------|
| Ambient temperature | -25 ... 70 °C (-13 ... 158 °F) |
| Storage temperature | -40 ... 85 °C (-40 ... 185 °F) |

Mechanical specifications

| | |
|----------------------------|---|
| Degree of protection | IP67 |
| Connection | M12 x 1 connector |
| Material | |
| Housing | ABS |
| Encapsulation compound | WEVO 403FL/300 |
| Installation | |
| Distance between two heads | Multiplex on: ≥ 100 mm Multiplex off: ≥ 150 mm |
| Mass | approx. 60 g |
| Cable length | 20 cm |

Compliance with standards and directives

| | |
|-------------------------------|---|
| Directive conformity | |
| R&TTE Directive 1995/5/EC | EN 301489-1 V1.8.1 (2008-04), EN 301489-3 V1.4.1 (2002-08), EN 300330-2 V1.3.1 (2006-04), EN 60950-1:2006 |
| Standard conformity | |
| Electromagnetic compatibility | EN 61000-6-2, EN 61000-6-4 |
| Degree of protection | EN 60529 |
| RFID | ISO/IEC 15693-2:2006, ISO/IEC 15693-3:2009, ISO/IEC 18000-3 |

Approvals and certificates

FCC approval

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Caution:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Radio approval

USA: FCC IREIQH1-F61-V1

Notes

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Accessories**IQC21-50P**

Data carrier

IQC21-58

Data carrier

IQC22-C5

Data carrier

IQC33-20

Data carrier

IQC33-30

Data carrier

IQC33-50

Data carrier

V1-G-5M-PUR-ABG-V1-W

Connecting cable, M12 to M12, PUR cable 4-pin, shielded

V1-G-10M-PUR-ABG-V1-W

Connecting cable, M12 to M12, PUR cable 4-pin, shielded

IQC24-27-T12

Data carrier

IQC31-22-T9

Data carrier

IQC22-22CT-T9

Data carrier

IQC22-C1 UNPRINTED

Data carrier

IQC21-50PVC

Data carrier

IQC21-F125

Data carrier

IQC33-20CT

Data carrier