

# CE

### **Model Number**

### SBL-8-H-600-IR-SL-3549

Background suppression sensor with fixed cable

#### **Features**

- Background suppression sensor for • roller conveyors
- For installation between the rollers on ٠ a roller conveyor
- Very small black-white difference .
- Adjustable detection range •
- Can be connected in series .
- Integrated Control logic •
- External valve can be connected


## **Product information**


Sensors of the SBL series are used to easily control material flow on roller conveyors in material handling and other branches.

The SBL series is a precise background suppression sensor according to the 3 element method. The sensor features superior background suppression and a very good ambient light immunity. Material and transport container of all colors and opacities are reliably detected.


The special design allows the sensor to be mounted between the rollers of a roller conveyor or any other conveying unit. Mounting between the rollers is easy and protects the sensor.

# Dimensions

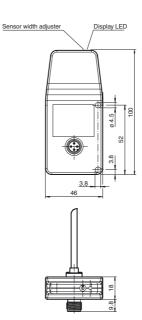



## **Electrical connection**

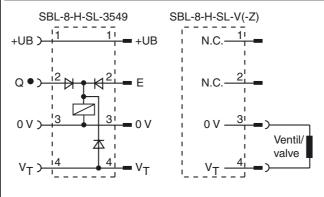




### Pinout



# Indicators/operating means



	1	Signal display	yellow
	2	Sensing range adjuster	

Pepperl+Fuchs Group www.pepperl-fuchs.com

Refer to "General Notes Relating to Pepperl+Fuchs Product Information" USA: +1 330 486 0001 fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411 fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com



Technical data			Accessories	
General specifications		OMH-SBL-01		
Detection range		15 600 mm		
Detection range min.		15 250 mm	Mounting bracket for sensors of SBL se- ries	
Detection range max.		15 600 mm		
Adjustment range		250 600 mm	V1-G-2M-PVC	
Reference target		standard white 200 mm x 200 mm		
Light source		IRED	Female cordset, M12, 4-pin, PVC cable	
Light type		modulated infrared light , 880 nm	V1-G-5M-PVC	
Black/White difference (6 %/90 %	24.)	< 15 %		
,	/0)		Female cordset, M12, 4-pin, PVC cable	
Diameter of the light spot Cascadability		approx. 40 mm at detection range 600 mm Valve coil / max. possible sensors per injection at 20 °C: 2 W / 38	V1-W-2M-PUR Female cordset, M12, 4-pin, PUR cable	
		1.6 W / 46 1 W / 64	V1-W-5M-PUR	
Ambient light limit		continuous light 30000 Lux, Fluorescent lamp 5000 Lux	Female cordset, M12, 4-pin, PUR cable	
Functional safety related paran	neters			
MTTF <sub>d</sub>		1100 a	V1S-TEE-V1/V1S	
Mission Time (T <sub>M</sub> )		20 a	T-Distributor, M12 connector to M12 so-	
Diagnostic Coverage (DC)		0 %	cket/connector	
Indicators/operating means				
Function indicator		LED yellow: lights when object is detected	Schraubendreher 0,5 x 3,0 mm	
Control elements		Detection range adjuster	Screwdriver	
		Detection range aujuster		
Electrical specifications			Additional accessories can be found in th	
Operating voltage	UB	24 VDC -20% +10%	Internet.	
Ripple		max. 10 %		
No-load supply current	Ι <sub>Ο</sub>	max. 20 mA		
Output				
Switching type		dark on		
Signal output		1 PNP, short-circuit protected, reverse polarity protected		
Switching voltage		max. 30 V DC		
Switching current		max. 200 mA		
Switching frequency	f	100 Hz		
Response time		5 ms		
Ambient conditions				
Ambient temperature		-20 50 °C (-4 122 °F)		
Storage temperature		-30 60 °C (-22 140 °F)		
<b>v</b> .		-30 00 0 (-22 140 1)		
Mechanical specifications		IBor		
Protection degree		IP65		
Connection		Connecting cable 1 m with Socket, straight M12 x 1 Connecting cable 0.15 m with Connector, straight M12 x 1		
Material				
Housing		plastic		
Optical face		plastic lens		
Mass		approx. 160 g		
Compliance with standards and ves	d directi			
Directive conformity		EMC Directive 2004/108/EC		
Standard conformity				
Product standard		EN 60947-5-2:2007 IEC 60947-5-2:2007		
Shock and impact resistance		IEC / EN 60068. half-sine, 40 g in each X, Y and Z directions		
Vibration resistance		IEC / EN 60068-2-6. Sinus. 10 -1000 Hz, 10 g in each X, Y and Z directions		
Approvals and certificates				
UL approval		cULus Listed, Class 2 Power Source, Type 1 enclosure		
CCC approval		CCC approval / marking not required for products rated ≤36 V		

Refer to "General Notes Relating to Pepperl+Fuchs Product Information"

Pepperl+Fuchs Group www.pepperl-fuchs.com


Germany: +49 621 776 4411 fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com



2

## **Curves/Diagrams**

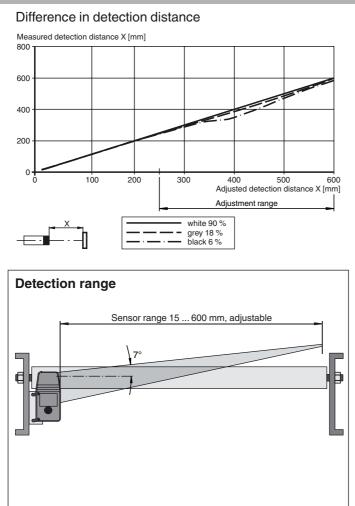

#### **Options:**

Sensors with the **version -V** are equipped with a solenoid valve and can directly control a 3/2 way pneumatic actuator, without any-interaction of an external system controlling unit (PLC). As soon as conveyed goods are detected, the diffuse mode sensor gives an electrical-signal to the pneumatic solenoid valve, which is then activated.

Sensors with the control logic **option -SL-(V)** allows up to 50 diffuse mode sensors to be connected-to each other (data and power), depending on the current consumption of sensor and solenoid valve. An additional supply power and data bus cable is used to interconnect the sensors with control logic option -SL. All necessary functions for controlling the material flow of conveyed goods are supported, such as: single feed, single release, slug release, external motor and solenoid valve control. It is also possible to energize the valves of all sensors included in the cascade by slug release (VT). To do this, apply the positive supply voltage (+UB) on the input VT of the first sensor.

Sensors with timing **function -Z** features the adjustment of the ON- and OFF delay of the output independently. This optimizes control of the solenoid valve. A zero pressure accumulation of the conveyed goods can be realized with application of time ON- and OFF delay of the output. The ON- and OFF delay to control the switching of the solenoid valve may be adjusted between 0 and 2 seconds.

Additional power supply between every 20 to 25 sensors can be realized by the use of the power in feed junction V1S-TEE-V1/ V1S in combination with a cable V1-G-...-PVC. This features to practically connect any number of SBL sensors in series. Attention should be paid to the maximum rated current of the cable and the connectors which usually is max. I = 4 A. For more details on the maximum rated current of single components, please refer to our datasheet values. For the electrical supply of the sensors the country specific standards have to be considered.

### Note:

Pepperl+Fuchs Group www.pepperl-fuchs.com

Use a screwdriver to adjust the sensing range. We strongly recommend to use the screwdriver given in the accessories section.

 Refer to "General Notes Relating to Pepperl+Fuchs Product Information"

 Pepperl+Fuchs Group
 USA: +1 330 486 0001
 O

USA: +1 330 486 0001 Germa fa-info@us.pepperl-fuchs.com fa-info@

Germany: +49 621 776 4411 fa-info@de.pepperl-fuchs.com Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com

