
Thru-beam sensor



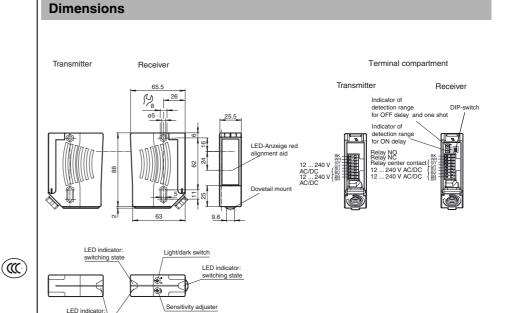

Model Number

LA29/LK29-Z-F1/31/116-SET

Thru-beam sensor With OMH-RLK29-HW mounting bracket


Features

CE

- Robust, compact photoelectric sen-• sor for single-beam gate protection
- Very high detection range
- No measurable emitted interference • on all frequencies
- Not sensitive to ambient light, even • with energy saving lamps
- Adjustable timer functions
- Version with accessories in scope of • delivery

Product information

Series 29 is a range of low-cost and, most importantly, reliable photoelectric sensors for monitoring industrial doors, elevators, and automatic gates. Their high degree of protection makes them the ideal solution for tasks outdoors and at thresholds, and in harsh environments. These "universal-voltage sensors" can be operated with any supply voltage from 24 V to 240 V, and with direct current or alternating current.



Electrical connection

operatio

GY


GY

ΒU

ΒU


ΒN

ΒN



The relay-functions "NC" and "NO" bear on the switching mode "Dark-ON". This complies to the default setting of the light/dark switch (factory setting).

Indicators/operating means

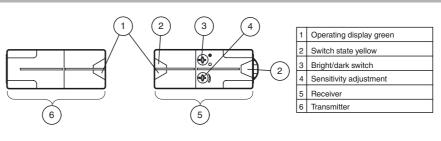

Refer to "General Notes Relating to Pepperl+Fuchs Product Information" Pepperl+Fuchs Group www.pepperl-fuchs.com

USA: +1 330 486 0001 fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411 fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com



Technical data

System components

General specifications

Transmitter frequency

Angle of divergence

Ambient light limit

Operation indicator Function indicator

Control elements

Operating voltage

Switching type

Signal output

Switching voltage

Switching current

Switching power Switching frequency

Response time

Timer function

Ambient conditions

Storage temperature

Degree of protection

Connection

Optical face Mass

Directive conformity

Standard conformity Product standard

Material Housing

ves

Output

Power consumption

MTTF_d Mission Time (T_M)

Diameter of the light spot

Diagnostic Coverage (DC)

Indicators/operating means

Functional safety related parameters

Effective detection range

Threshold detection range

Emitter

Receiver

Light source Light type

Alignment aid

Typical applications

- Monitoring closing edges of automatic industrial doors and elevators
- Monitoring the swing range of automatic gates
- Detecting and tracking objects in material handling

Detection area



Accessories
OMH-05 Mounting aid for round steel ø 12 mm or sheet 1.5 mm 3 mm
OMH-07 Mounting aid for round steel ø 12 mm or sheet 1.5 mm 3 mm
OMH-21 Mounting bracket
OMH-22 Mounting bracket
OMH-RLK29 Mounting bracket
OMH-MLV11-K dove tail mounting clamp
OMH-RLK29-HW Mounting bracket for rear wall mounting
OMH-RL28-C Weld slag cover model
Other suitable accessories can be found at www.pepperl-fuchs.com
Date of issue: 2017-02-07
Other suitable accessories can be found at www.pepperl-fuchs.com

sensitivity adjustment (Adjustment to < 25% of the effective operation rating range), Light-on/dark-on changeover switch **Electrical specifications** 12 ... 240 V AC/DC U_B P_0 \leq 3.5 VA light/dark on, switchable . (selectable, light/dark switching is only activated if the receiver has 'dark on' selected.) Relay, 1 alternator max. 250 V AC/DC max. 2 A DC: max. 50 W AC: max. 500 VA f 25 Hz 20 ms ON delay (GAN), OFF delay (GAB), one shot (IAB), ON delay-OFF delay (GAN-GAB), programmable adjustment range 0.1 ... 10 s Ambient temperature -40 ... 60 °C (-40 ... 140 °F) -40 ... 75 °C (-40 ... 167 °F) Mechanical specifications IP67 terminal compartment with 8 spring-loaded terminals for wire cross section 0.5 ... 1.5 mm² , Insulation stripping 7.5 ... 8.5 mm , M16 x 1.5 cable gland

LA29-F1/116

0 65 m

F1 = 25 kHz

Emitter 1.2°, Receiver 5° 50000 Lux

490 a

20 a

0%

LED green

LED yellow:

reserve)

90 m

LED

LK29-Z-F1/31/116

modulated visible red light , 660 nm

ching point 3. LED off: signal < switching point

illuminated constantly: beam is interrupted, flashes: reaching switching point, off: sufficient stability control

1. LED lit constantly: signal > 2 x switching point (function

2. LED flashes: signal between 1 x switching point and 2 x swit-

LED red (in receiver lens)

approx. 1.3 m at 65 m

Plastic ABS Plastic pane 200 g (emitter and receiver) Compliance with standards and directi-

> Low Voltage Directive 2006/95/EC EMC Directive 2004/108/EC

EN 60947-5-2:2007 IEC 60947-5-2:2007

Approvals and certificates

EAC conformity	TR CU 020/2011 TR CU 004/2011
Protection class	 II, rated voltage ≤ 250 V AC with pollution degree 1-2 according to IEC 60664-1 Output circuit basis insulation of input circuit according to EN 50178, rated insulation voltage 230 V AC Caution! The protection class 2 is only valid when the terminal compartment is closed.
CCC approval	Certified by China Compulsory Certification (CCC)

Refer to "General Notes Relating to Pepperl+Fuchs Product Information" Pepperl+Fuchs Group


www.pepperl-fuchs.com


Germany: +49 621 776 4411 fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com

2

Curves/Diagrams

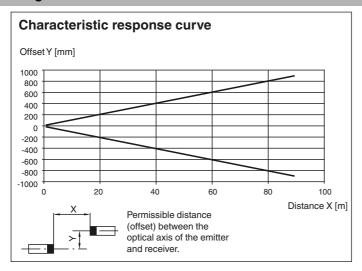

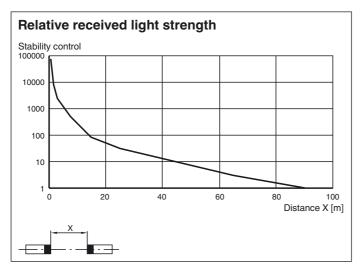

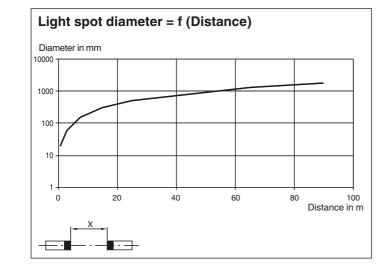

Timer functions

Pepperl+Fuchs Group www.pepperl-fuchs.com

Germany: +49 621 776 4411 fa-info@de.pepperl-fuchs.com



LA29/LK29-Z-F1/31/116-SET

Timer function	Switching type		Receiver exposed Receiver dark
ON ON Without	Light Dark		ON OFF
1 2 3 4	Light		ON OFF
ON B ON delay	Dark	ton ton ton	ON OFF
<u>01 2 3 4</u>	Light		ON OFF
ON OFF delay	Dark	tOFF	ON OFF
1 2 3 4	Light	tos tos	ON OFF
ON ON One shot	Dark	tos tos tos	ON OFF

Time $t_{ON},\,t_{OFF}$ and t_{OS} are adjustable from 0.1 to 10 seconds. The Light-/Dark-Switch (Left, outer switch) is shown in the "Dark ON" position.

Туре	Description	Notes
-Z	OFF delay timer	Adjustable time interval
	one shot timer	(0.1 s - 10 s)
	ON delay timer	
	ON delay timer / OFF delay timer	
	ON delay timer / one shot timer	



4