

Features

- 1-channel
- Input Ex ia
- Mounting in Zone 2, Class I/Div.2 or in the safe area
- Converter for 2-, 3- and 4-wire Pt100, slide wire sensors
- Simulation mode for service operations (forcing)
- Line fault detection (LFD)
- Permanently self-monitoring
- Module can be exchanged under voltage

Function


The RTD converter accepts 2-, 3-, 4-wire RTD signals (Pt100) from the hazardous area.

Open and short-circuit line faults are detected.



The intrinsically safe input is galvanically isolated from the bus and the power supply.

Assembly

Front view

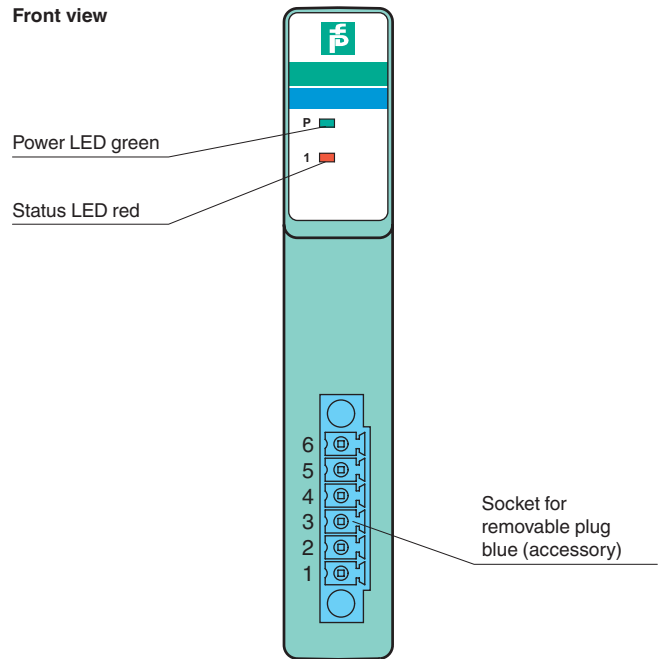

Connection

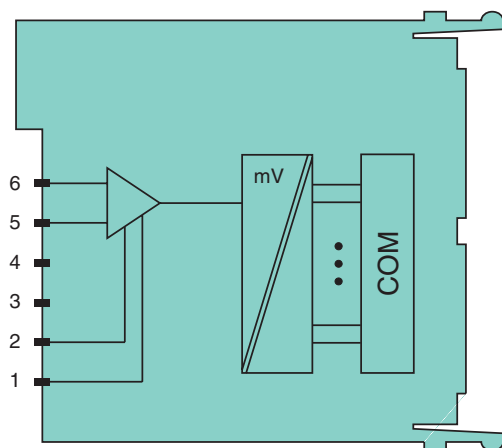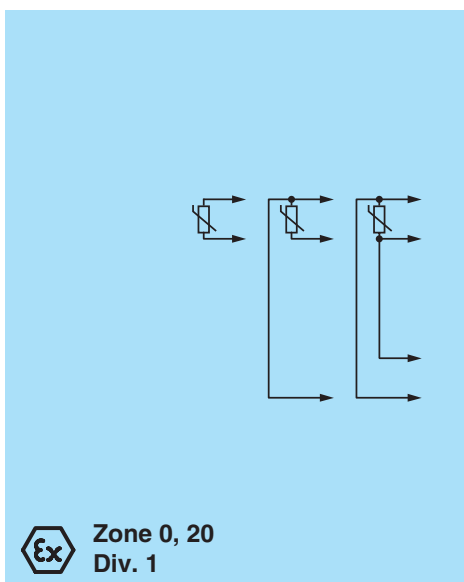

Release date 2018-09-13 16:18 Date of issue 2018-09-13 254805_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

Slots		
Occupied slots		1
Supply		
Connection		backplane bus
Rated voltage	U_r	12 V DC , only in connection with the power supplies LB9***
Power dissipation		0.4 W
Power consumption		0.4 W
Internal bus		
Connection		backplane bus
Interface		manufacturer-specific bus to standard com unit
temperature input		
Number of channels		1
Suitable field devices		
Field device		resistance thermometer
Field device [3]		slide-wire sensors
Field device interface		
Connection		2-wire sensor
Connection [2]		3-wire sensor
Connection [3]		4-wire sensor
Connection		2-wire connection: 5, 6 3-wire connection: 1, 5, 6 4-wire connection: 1, 2, 5, 6
Measurement range		10 ... 400 Ω (500 Ω incl. line resistance)
Slide-wire sensor		10 ... 400 Ω
Measuring current		200 μ A
Smallest span		20 Ω for 0.1 % accuracy
Linearity error		0.1 %
Conversion time		\leq 20 ms without LFD \leq 150 ms with LFD
Lead resistance		\leq 50 Ω per strand
Line fault detection		can be switched on/off for each channel via configuration tool
Short-circuit		$<$ 10 Ω
Open-circuit		$>$ 1 k Ω
Transfer characteristics		
Deviation		
Influence of ambient temperature		max. 0,1 %/10 K
Indicators/settings		
LED indication		Power LED (P) green: supply Status LED (1) red: line fault
Coding		optional mechanical coding via front socket
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1
Conformity		
Electromagnetic compatibility		
Degree of protection		NE 21
Environmental test		IEC 60529
Shock resistance		EN 60068-2-14
Vibration resistance		EN 60068-2-27
Damaging gas		EN 60068-2-6
Relative humidity		EN 60068-2-42
Ambient conditions		
Ambient temperature		-20 ... 60 $^{\circ}$ C (-4 ... 140 $^{\circ}$ F)
Storage temperature		-25 ... 85 $^{\circ}$ C (-13 ... 185 $^{\circ}$ F)
Relative humidity		95 % non-condensing
Shock resistance		shock type I, shock duration 11 ms, shock amplitude 15 g, number of shocks 18
Vibration resistance		frequency range 10 ... 150 Hz; transition frequency: 57.56 Hz, amplitude/acceleration \pm 0.075 mm/1 g; 10 cycles frequency range 5 ... 100 Hz; transition frequency: 13.2 Hz amplitude/acceleration \pm 1 mm/0.7 g; 90 minutes at each resonance
Damaging gas		designed for operation in environmental conditions acc. to ISA-S71.04-1985, severity level G3
Mechanical specifications		
Degree of protection		
Connection		IP20 when mounted on backplane
Connection		removable front connector with screw flange (accessory) wiring connection via spring terminals (0.14 ... 1.5 mm ²) or screw terminals (0.08 ... 1.5 mm ²)
Mass		approx. 90 g
Dimensions		16 x 100 x 102 mm (0.63 x 3.9 x 4 inch)

Release date 2018-09-13 16:18 Date of issue 2018-09-13 254805_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

Data for application in connection with hazardous areas		
EU-Type Examination Certificate		
PTB 03 ATEX 2042		
Marking		
Ex II (1) G [Ex ia] IIC Ex II (1) D [Ex ia] IIIC		
Input		
Voltage	U_o	2.7 V
Current	I_o	43 mA
Power	P_o	93 mW (trapezoid characteristic curve)
Certificate		
PF 08 CERT 1234 X		
Marking		
Ex II 3 G Ex nA IIC T4 Gc		
Galvanic isolation		
Input/power supply, internal bus		
safe electrical isolation acc. to EN 60079-11, voltage peak value 375 V		
Directive conformity		
Directive 2014/34/EU		
EN 60079-0:2009 EN 60079-11:2007 EN 60079-15:2010 EN 61241-11:2006		
International approvals		
ATEX approval		
PTB 03 ATEX 2042		
UL approval		
E106378		
Control drawing		
116-0322		
IECEx approval		
BVS 09.0037X		
Approved for		
Ex nA [ja Ga] IIC T4 Gc [Ex ia Da] IIIC		
Marine approval		
Lloyd Register		
15/20021		
DNV GL Marine		
TAA0000034		
Bureau Veritas Marine		
22449/B0 BV		
General information		
System information		
<p>The module has to be mounted in appropriate backplanes (LB9***) in Zone 2 or outside hazardous areas. Here, observe the corresponding declaration of conformity.</p> <p>For use in hazardous areas (e. g. Zone 2, Zone 22 or Div. 2) the module must be installed in an appropriate enclosure.</p>		
Supplementary information		
EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .		

Release date 2018-09-13 16:18 Date of issue 2018-09-13 254805_eng.xml