

Model Number

AHM58-H

Features

- Industrial standard housing Ø58 mm
- 30 Bit multiturn
- Hardware encoder
- Data transfer up to 2 MBaud
- **Optically isolated RS 422 interface**
- Hollow shaft

Description

This multiturn absolute encoder with modern fast technology transmits a position value corresponding to the shaft setting via the SSI interface (Synchronous Serial Interface). The maximum resolution of the AHM58-H is maximum 65536 steps per revolution at 16384 revolutions. In contrast to the AHM58 series the encoder does not have a microcontroller. Thus, it is a pure hardware encoder The control module sends a clock bundle to the ab-

solute encoder to obtain position data. The rotary encoder then sends the position data synchronous to the cycles of the control module. It is possible to select the counting direction with the function input. The absolute encoder is mounted directly onto the application shaft, without any coupling. Rotation of the absolute encoder is prevented by a torque rest The electrical connection is made by a 12-pin

round plug connector. A version with a 1 m cable connector is also available.

Technical data General specifications Detection type Device type Electrical specifications Operating voltage U_B No-load supply current In Time delay before availability tv Linearity Output code Code course (counting direction) Interface Interface type Monoflop time Resolution Single turn Multiturn Overall resolution Transfer rate Voltage drop Standard conformity Input 1 Input type Signal voltage High Low Input current Switch-on delay Connection Connector Cable Standard conformity Degree of protection Climatic testing Emitted interference Noise immunity Shock resistance Vibration resistance Ambient conditions Operating temperature Storage temperature Mechanical specifications Material Combination 1 Mass

4.5 ... 30 V DC max. 180 mA

photoelectric sampling

Multiturn absolute encoder

< 250 ms ± 2 LSB at 16 Bit, ± 1 LSB at 13 Bit, ± 0,5 LSB at 12 Bit Gray code, binary code cw descending (clockwise rotation, code course descending)

SSI $20~\pm10~\mu s$

up to 16 Bit 14 Bit up to 30 Bit 0.1 ... 2 MBit/s U_B - 2.5 V RS 422

Selection of counting direction (cw/ccw)

4.5 ... 30 V 0 ... 2 V < 6 mA < 10 ms

type 9416 (M23), 12-pin, type 9416L (M23), 12-pin Ø7 mm, 6 x 2 x 0.14 mm², 1 m

DIN EN 60529, IP65 DIN EN 60068-2-3, no moisture condensation EN 61000-6-4:2007 EN 61000-6-2:2005 DIN EN 60068-2-27, 100 g, 6 ms DIN EN 60068-2-6, 20 g, 10 ... 2000 Hz

-40 ... 85 °C (-40 ... 185 °F) -40 ... 85 °C (-40 ... 185 °F)

Housing: aluminum Flange: aluminum Shaft: stainless steel approx. 300 g (combination 1) max. 3000 min 30 gcm² < 3 Ncm

± 0.9 ° static: ± 0.3 mm, dynamic: ± 0.1 mm static: ± 0.5 mm, dynamic: ± 0.2 mm

Approvals and certificates

UL approval

Rotational speed

Moment of inertia

Starting torque

Angle offset

Axial offset

Radial offset

Shaft load

cULus Listed, General Purpose, Class 2 Power Source

Refer to "General Notes Relating to Pepperl+Fuchs Product Information"


Pepperl+Fuchs Group www.pepperl-fuchs.com


USA: +1 330 486 0001 fa-info@us.pepperl-fuchs.com Germany: +49 621 776 4411 fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com



Dimensions

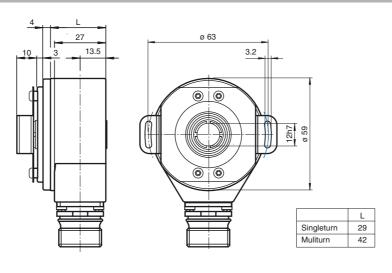

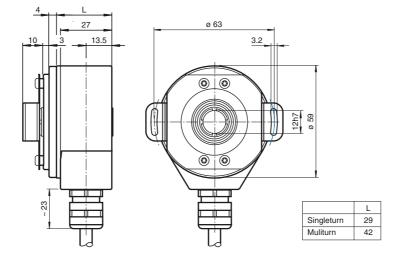

Germany: +49 621 776 4411 fa-info@de.pepperl-fuchs.com Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com



Electrical connection

Signal	Cable Ø7 mm, 12-core	Connector 9416, 12-pin	Connector 9416L, 12-pin	Explanation
GND (encoder)	White	1	1	Power supply
U _b (encoder)	Brown	2	8	Power supply
Clock (+)	Green	3	3	Positive cycle line
Clock (-)	Yellow	4	11	Negative cycle line
Data (+)	Grey	5	2	Positive transmission data
Data (-)	Pink	6	10	Negative transmission data
Reserved	Blue	7	12	Not wired, reserved
V/R	Red	8	5	Input for selection of counting direction
Reserved	Black	9	9	Not wired, reserved
Reserved	Violet	10	4	Not wired, reserved
Reserved	Grey/Pink	11	6	Not wired, reserved
Reserved	Red/Blue	12	7	Not wired, reserved
		9 8 10 7 12 6	8 7 11 6 5 4	

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group www.pepperl-fuchs.com




Description

The Synchronous Serial Interface was specially developed for transferring the output data of an absolute encoder to a control device. The control module sends a clock bundle and the absolute encoder responds with the position value.

Thus only 4 lines are required for the clock and data, no matter what the resolution of the rotary encoder is. The RS 422 interface is optically isolated from the power supply.

SSI signal course Standard

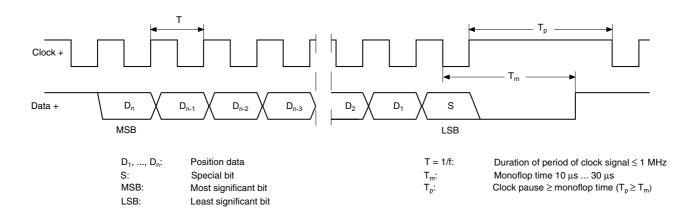

SSI output format Standard

- At idle status signal lines "Data +" and "Clock +" are at high level (5 V).
- The first time the clock signal switches from high to low, the data transfer in which the current information (position data (D_n) and special bit (S)) is stored in the encoder is introduced.
- The highest order bit (MSB) is applied to the serial data output of the encoder with the first rising pulse edge.
- The next successive lower order bit is transferred with each following rising pulse edge.
- After the lowest order bit (LSB) has been transferred the data line switches to low until the monoflop time T_m has expired.
- No subsequent data transfer can be started until the data line switches to high again or the time for the clock pause T_p has expired.
- After the clock sequence is complete, the monoflop time T_m is triggered with the last falling pulse edge.
- The monoflop time T_m determines the lowest transmission frequency.

SSI output format ring slide operation (multiple transmission)


- In ring slide operation, multiple transmission of the same data word over the SSI interface makes it possible to offer the possibility of detecting transmission errors.
- In multiple transmission, 25 bits are transferred per data word in standard format.
- If the clock change is not interrupted after the last falling pulse edge, ring slide operation automatically becomes active. This means that the information that was stored at the time of the first clock change is generated again.
- After the first transmission, the 26^{th} pulse controls data repetition. If the 26^{th} pulse follows after an amount of time greater than the monoflop time T_m , a new current data word will be transmitted with the following pulses.



Input

If the pulse line is exchanged, the data word is generated offset. Ring slide operation is possible up to max. 13 bits.

Block diagram

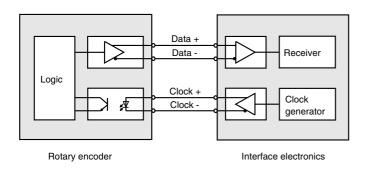

The selection of the counting direction input (V/R) is activated with 0-level.

Line length


Line length in m	Baudrate in kHz
< 50	< 400
< 100	< 300
< 200	< 200
< 400	< 100

Pepperl+Fuchs Group www.pepperl-fuchs.com Germany: +49 621 776 4411 fa-info@de.pepperl-fuchs.com Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com



4





Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group www.pepperl-fuchs.com

USA: +1 330 486 0001 fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411 fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com



Accessories

	Accessories	essories Name/defining feature	
	Connectoro	Cable socket	9416
0	Connectors	Cable socket	9416L

For additional information on the accessories, please see the "Accessories" section.

