



## Model Number

ENA58IL-S\*\*\*-Profibus

## Features

- Solid shaft
- 30 Bit multiturn
- Free of wear magnetic sampling
- High resolution and accuracy
- Mechanical compatibility with all major encoders with fieldbus interface
- Status LEDs

## Description

The ENA58IL series with Profibus interface are high-precision rotary encoders with internal magnetic sampling. The most common mechanical interfaces are available in the ENA58IL series. For the electrical connection, models with connection cover and radial connector outlet or cable outlet or models with axial connector outlet are available. This versatility allows the use of the rotary encoder for all common applications.

## Technical data

### General specifications

Detection type	magnetic sampling
Device type	Absolute encoders
Linearity error	$\leq \pm 0.1^\circ$
UL File Number	E223176 "For use in NFPA 79 Applications only" , if UL marking is marked on the product.

### Functional safety related parameters

MTTF <sub>d</sub>	280 a at 40 °C
Mission Time (T <sub>M</sub> )	12 a
L <sub>10</sub>	55 E+8 revolutions at 40/110 N axial/radial shaft load
Diagnostic Coverage (DC)	0 %

### Electrical specifications

Operating voltage U <sub>B</sub>	10 ... 30 V DC
Power consumption P <sub>0</sub>	approx. 2.5 W
Time delay before availability t <sub>v</sub>	< 1000 ms
Output code	binary code
Code course (counting direction)	adjustable

### Interface

Interface type	PROFIBUS DP DPV0, DPV1, DPV2
----------------	---------------------------------

Resolution	
Single turn	up to 16 Bit
Multiturn	up to 14 Bit
Overall resolution	up to 30 Bit
Transfer rate	$\leq 12$ MBit/s

### Connection

Connector	For model with axial connector outlet or connection cover with radial connector outlet: Profibus: 1 plug M12 x 1, 5-pin, B-coded; 1 socket M12 x 1, 5-pin, B-coded Supply: 1 plug M12 x 1, 4-pin, A-coded
Terminal compartment	For model with connection cover with radial cable outlet

### Standard conformity

Degree of protection	DIN EN 60529 , axial connector outlet: IP54 connection cover and shaft seal: IP66/IP67 connection cover, no shaft seal: IP65
Climatic testing	DIN EN 60068-2-3, no moisture condensation
Emitted interference	EN 61000-6-4:2007
Noise immunity	EN 61000-6-2:2005
Shock resistance	DIN EN 60068-2-27, 100 g, 6 ms
Vibration resistance	DIN EN 60068-2-6, 10 g, 10 ... 1000 Hz

### Ambient conditions

Operating temperature	-40 ... 85 °C (-40 ... 185 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Relative humidity	98 % , no moisture condensation

### Mechanical specifications

Material	
Housing	Zinc plated steel, painted
Flange	Aluminum
Shaft	Stainless steel
Mass	approx. 300 g for model without connection cover approx. 480 g for model with connection cover
Rotational speed	max. 12000 min <sup>-1</sup> for IP54, IP65 max. 3000 min <sup>-1</sup> for IP66/IP67
Moment of inertia	30 gcm <sup>2</sup>
Starting torque	< 3 Ncm
Shaft load	
Axial	40 N
Radial	110 N


### Accessories

Designation	for model without connection cover : Terminator ICZ-TR-V15B, item number 127860 (optional)
-------------	---


### Approvals and certificates

UL approval	cULus Listed, General Purpose, Class 2 Power Source , if UL marking is marked on the product.
-------------	---


Dimensions

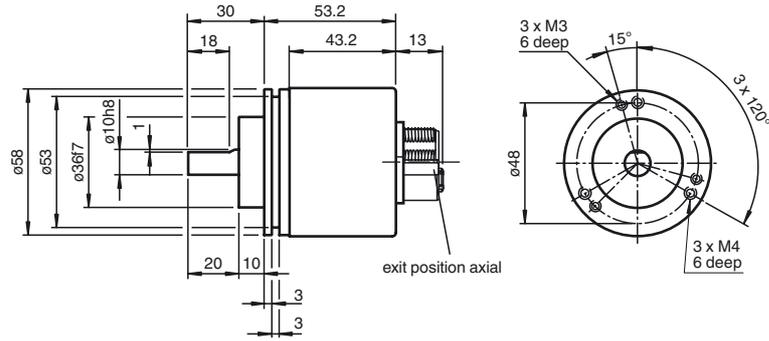

Clamping flange

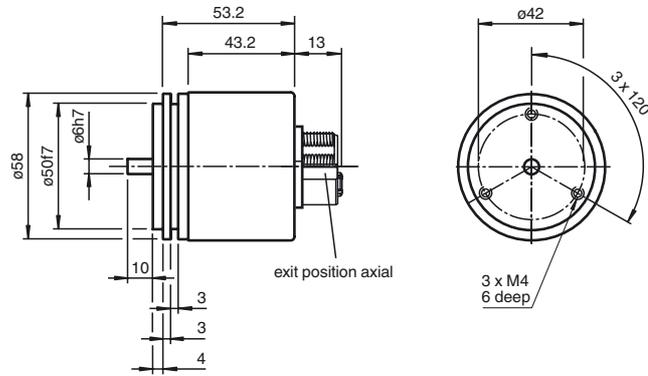


Servo flange

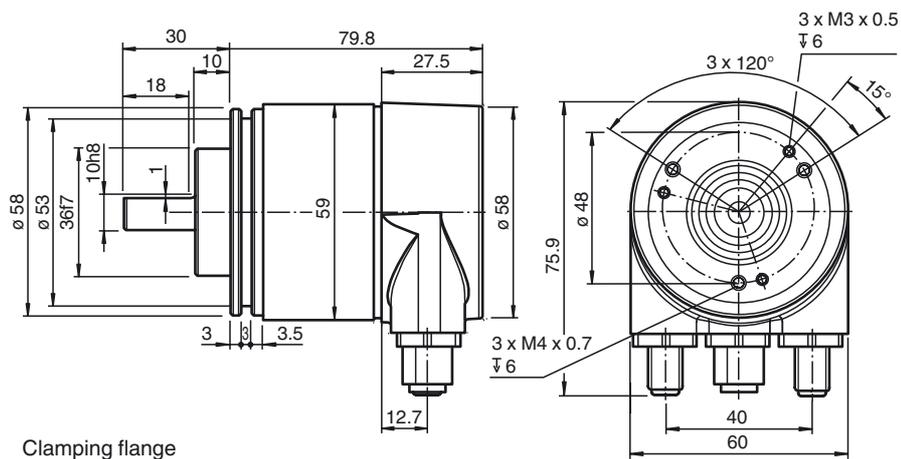


Clamping flange


Release date: 2019-01-30 13:22 Date of issue: 2019-01-30 1183753\_eng.xml

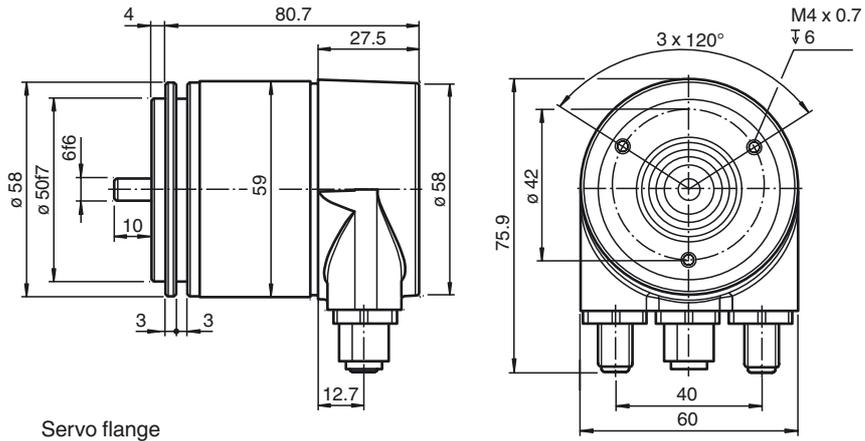

Servo flange

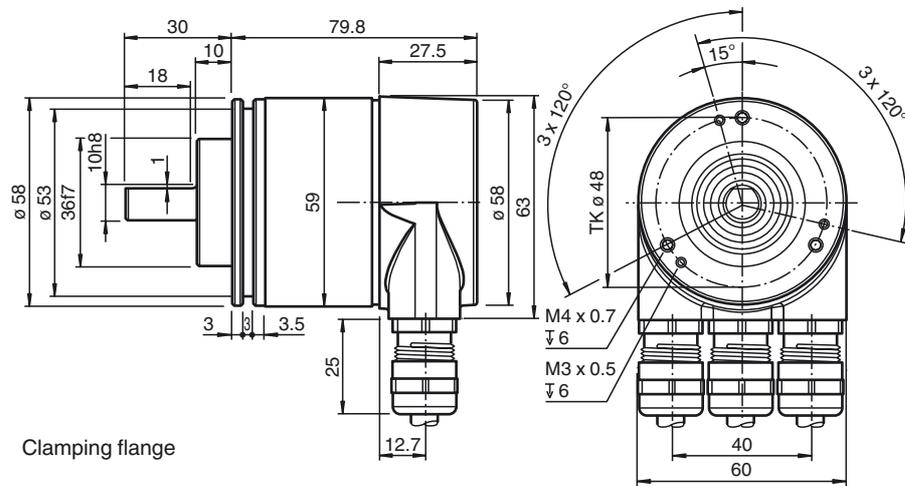

Clamping flange

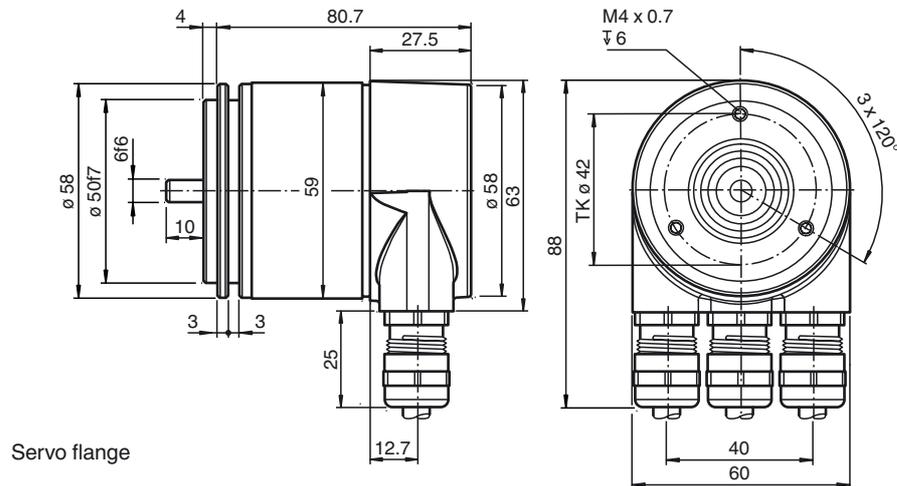

Servo flange

Release date: 2019-01-30 13:22 Date of issue: 2019-01-30 1183753\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".




Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**Electrical connection**

Pin	Male connector M12 x 1, 4-pin, A-coded	Male connector M12 x 1, 5-pin, B-coded	Female connector M12 x 1, 5-pin, B-coded	Terminal	Explanation
1	Supply voltage +U <sub>B</sub>	Not connected	+ 5 V for terminator (2P5)	⊥	Ground connection for power supply
2	Not connected	Data wire A, Bus IN	Data wire A, Bus Out	<b>B (left)</b>	Data line B (pair 1), Bus In
3	0 V	Not connected	GND for terminator (2M)	<b>A (left)</b>	Data line A (pair 1), Bus In
4	Not connected	Data wire B, Bus IN	Data wire B, Bus Out	(-)	0 V
5	-	Not connected	Not connected	(+)	10 V ... 30 V
				<b>B (right)</b>	Data line B (pair 2), Bus Out
				<b>A (right)</b>	Data line A (pair 2), Bus Out
				(-)	0 V
				(+)	10 V ... 30 V
					The supply lines only have to be connected once (regardless to which terminal). The outgoing bus is being uncoupled while the terminal resistor is on.

Release date: 2019-01-30 13:22 Date of issue: 2019-01-30 t183753\_eng.xml

## Indicating and operating elements on model with axial connector outlet

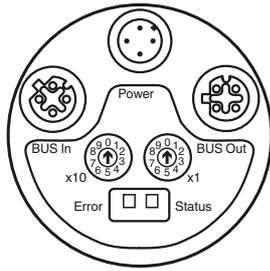



### Adjusting the participant address

The participant address can be adjusted with the rotary switches. The address can be defined between 1 and 99, and may only be assigned once.

### LED-indicators


LED red	LED green	Meaning
off	off	No voltage supply
on	on	Encoder ready, no configuration data received. possible reasons: - wrong address adjusted - wrong bus wiring
on	flashing	Parameterising or configuration error. Encoder receives data of incorrect length or inconsistent data. possible reason: - adjusted encoder resolution exceeds
flashing	on	Encoder ready, no communication with master (i.e. wrong address setting)
on	off	Data timeout (> 40 s). (i.e. data lines interrupted)
off	on	Normal operation, Data Exchange Mode
off	flashing	Installation Mode in Data Exchange Mode.

Indicating and operating elements on model with connection cover

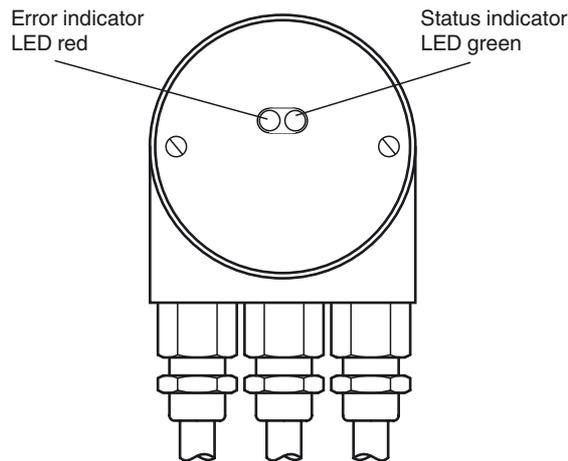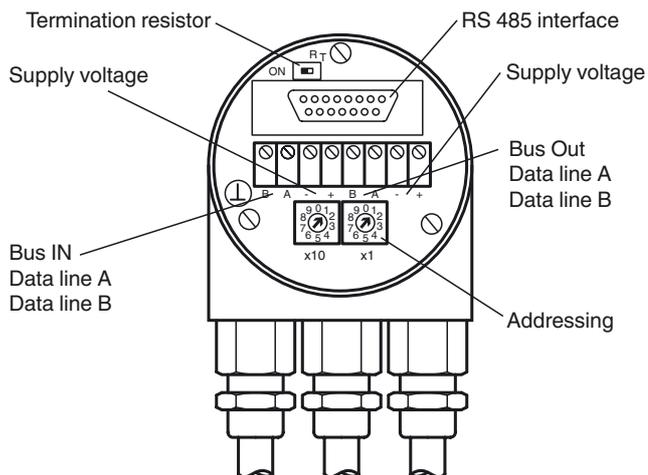


Adjusting the participant address

The participant address can be adjusted with the rotary switches. The address can be defined between 1 and 99, and may only be assigned once.



Adjusting the termination resistor

The terminating resistor  $R_T$  (220  $\Omega$ ) can be connected to the circuit by means of the switch:

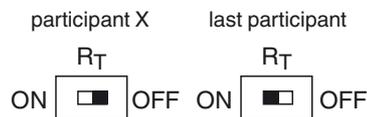

LED-indicators

LED red	LED green	Meaning
off	off	No voltage supply
on	on	Encoder ready, no configuration data received. possible reasons: - wrong address adjusted - wrong bus wiring
on	flashing	Parameterising or configuration error. Encoder receives data of incorrect length or inconsistent data. possible reason: - adjusted encoder resolution exceeds
flashing	on	Encoder ready, no communication with master (i.e. wrong address setting)
on	off	Data timeout (> 40 s). (i.e. data lines interrupted)
off	on	Normal operation, Data Exchange Mode
off	flashing	Installation Mode in Data Exchange Mode.

Release date: 2019-01-30 13:22 Date of issue: 2019-01-30 1183753\_eng.xml

