

## Datasheet - SRB 301LCI-24VAC/DC



Guard door monitors and Safety control modules for Emergency Stop applications / General Purpose safety controllers (Series PROTECT SRB) / SRB301LC



- Suitable for signal processing of potential-free outputs, e.g. emergency stop command devices, position switches and solenoid interlocks
- 3 safety contacts, STOP 0
- 1 Signalling output

(Minor differences between the printed image and the original product may exist!)

### Ordering details

|                          |                     |
|--------------------------|---------------------|
| Product type description | SRB 301LCI-24VAC/DC |
| Article number           | 101176968           |
| EAN Code                 | 4250116202027       |
| eCl@ss                   | 27-37-19-01         |

### Approval

Approval



### Classification

|                  |  |
|------------------|--|
| Standards        | EN ISO 13849-1, IEC 61508, EN 60947-5-1  |
| PL               | up e (STOP 0)  |
| Control category | up 4 (STOP 0)  |
| DC               | 99% (STOP 0)   |
| CCF              | > 65 points  |
| PFH value        | $\leq 2, 0 \times 10^{-8}/h$ (STOP 0)  |
| SIL              | up 3 (STOP 0)  |
| Mission time     | 20 Years   |
| - notice         | The PFH value is applicable for the combinations listed in the table for contact load (K) (current through enabling paths) and switching cycle |

number (n-op/y).


In case of 365 operating days per year and a 24-hour operation, this results in the specified switching cycle times (t-cycle) for the relay contacts.

Diverging applications on request.

| K     | n-op/y  | t-cycle  |
|-------|---------|----------|
| 20 %  | 525.800 | 1,0 min  |
| 40 %  | 210.240 | 2,5 min  |
| 60 %  | 75.067  | 7,0 min  |
| 80 %  | 30.918  | 17,0 min |
| 100 % | 12.223  | 43,0 min |

## Global Properties

---

|  |   |
|--|---|
| Permanent light  | SRB301LC  |
| Standards  | IEC/EN 60204-1, EN 60947-5-1, EN ISO 13849-1, IEC 61508   |
| Compliance with the Directives (Y/N)  | Yes   |
| Climatic stress  | EN 60068-2-78   |
| Mounting   | snaps onto standard DIN rail to EN 60715                  |
| Terminal designations  | IEC/EN 60947-1  |
| Materials  |   |
| - Material of the housings   | Plastic, glass-fibre reinforced thermoplastic, ventilated |
| - Material of the contacts   | AgSn0, self-cleaning, positive action                     |
| Weight   | 230   |
| Start conditions   | Automatic or Start button                                 |
| Start input (Y/N)  | Yes   |
| Feedback circuit (Y/N)   | Yes   |
| Start-up test (Y/N)  | No  |
| Automatic reset function (Y/N)   | Yes   |
| Reset with edge detection (Y/N)  | No  |
| Pull-in delay  |   |
| - ON delay with automatic start  | typ. 30 ms  |
| Drop-out delay   |   |
| - Drop-out delay in case of emergency stop   | ≤ 50 ms   |

## Mechanical data

---

|   |                                       |
|---|---------------------------------------|
| Connection type                         | Screw connection                      |
| Cable section                           |                                       |
| - Min. Cable section                    | 0,25                                  |
| - Max. Cable section                    | 2.5                                   |
| Pre-wired cable                         | rigid or flexible                     |
| Tightening torque for the terminals     | 0,6                                   |
| Detachable terminals (Y/N)              | Yes                                   |
| Mechanical life                         | 10.000.000 operations                 |
| Electrical lifetime                     | Derating curve available on request   |
| resistance to shock                     | 30 g / 11 ms                          |
| Resistance to vibration To EN 60068-2-6 | 10...55 HZ, Amplitude 0,35 mm, ± 15 % |

## Ambient conditions

---

|  |        |
|--|--------|
| Ambient temperature                      |        |
| - Min. environmental temperature         | -25 °C |
| - Max. environmental temperature         | +45 °C |
| Storage and transport temperature        |        |
| - Min. Storage and transport temperature | -40 °C |
| - Max. Storage and transport temperature | +85 °C |

|   |                 |
|---|-----------------|
| Protection class  |                 |
| - Protection class-Enclosure                            | IP40            |
| - Protection class-Terminals                            | IP20            |
| - Protection class-Clearance                            | IP54            |
| Air clearances and creepage distances To IEC/EN 60664-1 |                 |
| - Rated impulse withstand voltage $U_{imp}$             | 4 kV            |
| Overvoltage category                                    | III To VDE 0110 |
| - Degree of pollution                                   | 2 To VDE 0110   |

## Electromagnetic compatibility (EMC)

---

|            |                             |
|------------|-----------------------------|
| EMC rating | conforming to EMC Directive |
|------------|-----------------------------|

## Electrical data

---

|   |  |
|---|--|
| Rated DC voltage for controls               |  |
| - Max. rated DC voltage for controls        | 20.4   |
| - Max. rated DC voltage for controls        | 28.8   |
| Rated AC voltage for controls, 50 Hz        |  |
| - Min. rated AC voltage for controls, 50 Hz | 20.4   |
| - Max. rated AC voltage for controls, 50 Hz | 26.4   |
| Rated AC voltage for controls, 60 Hz        |  |
| - Min. rated AC voltage for controls, 60 Hz | 20.4   |
| - Max. rated AC voltage for controls, 60 Hz | 26.4   |
| Contact resistance                          | max. 100 mΩ  |
| Power consumption                           | max. 1.7 W; 1.9 VA   |
| Type of actuation                           | AC/DC  |
| Switch frequency                            | max. 5 HZ  |
| Rated operating voltage $U_e$               | 24 VDC -15% / +20%, residual ripple max. 10%<br>24 VAC -15% / +10% |
| Operating current $I_e$                     | 0,08 A   |
| Frequency range                             | 50 / 60 HZ   |
| Electronic protection (Y/N)                 | Yes  |
| Fuse rating for the operating voltage       | Internal electronic trip, tripping current > 0,25 A                |

## Inputs

---

|                                    |  |
|------------------------------------|--|
| <b>Monitored inputs</b>            |  |
| - Short-circuit recognition (Y/N)  | Yes  |
| - Wire breakage detection (Y/N)    | Yes  |
| - Earth connection detection (Y/N) | Yes  |
| Number of shutters                 | 0 piece  |
| Number of openers                  | 2 piece  |
| Cable length                       | 1500 m with 1.5 mm <sup>2</sup> ;<br>2500 m with 2.5 mm <sup>2</sup> |
| Conduction resistance              | max. 40 Ω  |

## Outputs

---

|                              |         |
|------------------------------|---------|
| Stop category                | 0       |
| Number of safety contacts    | 3 piece |
| Number of auxiliary contacts | 1 piece |
| Number of signalling outputs | 0 piece |
| Switching capacity           |         |

|  |  |
|--|--|
| - Switching capacity of the safety contacts                                | max. 250 VAC, 6 A ohmic (inductive in case of appropriate protective wiring)<br>min. 10 V, 10 mA |
| - Switching capacity of the auxiliary contacts                             | 24 VDC, 2 A  |
| Fuse rating  |  |
| - Protection of the safety contacts  | 6 A slow blow  |
| - Fuse rating for the auxiliary contacts                                   | 2 A slow blow  |
| Utilisation category To EN 60947-5-1                                       | AC-15: 230 V / 6 A<br>DC-13: 24 V / 6 A  |
| Number of undelayed semi-conductor outputs with signaling function         | 0 piece  |
| Number of undelayed outputs with signaling function (with contact)         | 1 piece  |
| Number of delayed semi-conductor outputs with signaling function.          | 0 piece  |
| Number of delayed outputs with signalling function (with contact).         | 0 piece  |
| Number of secure undelayed semi-conductor outputs with signaling function  | 0 piece  |
| Number of secure, undelayed outputs with signaling function, with contact. | 3 piece  |
| Number of secure, delayed semi-conductor outputs with signaling function   | 0 piece  |
| Number of secure, delayed outputs with signaling function (with contact).  | 0 piece  |

## LED switching conditions display

---

|  |     |
|--|-----|
| LED switching conditions display (Y/N)                         | Yes |
| Number of LED's  | 4   |
| LED switching conditions display                               |     |
| - The integrated LEDs indicate the following operating states. |     |
| - Position relay K1  |     |
| - Position relay K2  |     |
| - Supply voltage   |     |
| - Internal operating voltage Ui                                |     |

## Miscellaneous data

---

Applications



Emergency-Stop button



Guard system



Pull-wire emergency stop switches

## Dimensions

---

Dimensions

|          |         |
|----------|---------|
| - Width  | 22.5 mm |
| - Height | 100 mm  |
| - Depth  | 121 mm  |

## notice

---

Inductive loads (e.g. contactors, relays, etc.) are to be suppressed by means of a suitable circuit.

## notice - Wiring example

---

Input level: The example shows a 2-channel control of a guard door monitoring with two position switches, whereof one with positive break, external reset button (R); cross-wire monitoring and feedback circuit (H2)

The control recognises cross-short, cable break and earth leakages in the monitoring circuit.

Relay outputs: Suitable for 2 channel control, for increase in capacity or number of contacts by means of contactors or relays with positive-guided contacts.

In case of a 1-channel control, connect the NC contact to the operating voltage and bridge S11/S12 and S21/S22.

Automatic start: The automatic start is programmed by connecting the feedback circuit to the terminals X1/X2. If the feedback circuit is not required, establish a bridge

The wiring diagram is shown with guard doors closed and in de-energised condition.

## Documents

---

**Operating instructions and Declaration of conformity (it)** 312 kB, 10.10.2018

Code: mrl\_srb\_301lc\_it

**Operating instructions and Declaration of conformity (es)** 310 kB, 10.10.2018

Code: mrl\_srb\_301lc\_es

**Operating instructions and Declaration of conformity (jp)** 397 kB, 10.10.2018

Code: mrl\_srb\_301lc\_jp

**Operating instructions and Declaration of conformity (nl)** 321 kB, 10.10.2018

Code: mrl\_srb\_301lc\_nl

**Operating instructions and Declaration of conformity (en)** 303 kB, 10.10.2018

Code: mrl\_srb\_301lc\_en

**Operating instructions and Declaration of conformity (fr)** 314 kB, 10.10.2018

Code: mrl\_srb\_301lc\_fr

**Operating instructions and Declaration of conformity (pl)** 324 kB, 10.10.2018

Code: mrl\_srb\_301lc\_pl

**Operating instructions and Declaration of conformity (da)** 311 kB, 10.10.2018

Code: mrl\_srb\_301lc\_da

**Operating instructions and Declaration of conformity (pt)** 315 kB, 10.10.2018

Code: mrl\_srb\_301lc\_pt

**Operating instructions and Declaration of conformity (de)** 289 kB, 10.10.2018

Code: mrl\_srb\_301lc\_de

**Wiring example (99)** 19 kB, 04.08.2008

Code: Ksrb3I04

**Wiring example (99)** 20 kB, 22.08.2008

Code: ksr3I11

**Wiring example (99)** 18 kB, 22.08.2008

Code: ksr3I19

**Wiring example (99)** 18 kB, 22.08.2008

Code: ksr3I19

**TÜV certification (de, en)** 763 kB, 07.04.2017

Code: z\_l30p01

**CCC certification (cn)** 296 kB, 16.01.2017

Code: q\_srbp02


**CCC certification** (en) 314 kB, 16.01.2017

Code: q\_srbp01


**EAC certification** (ru) 1 MB, 15.03.2018

Code: q\_aesp01


## Images

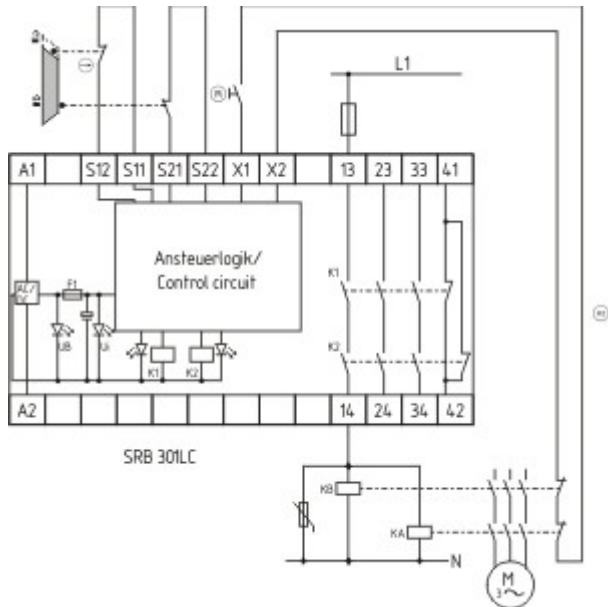

Wiring example

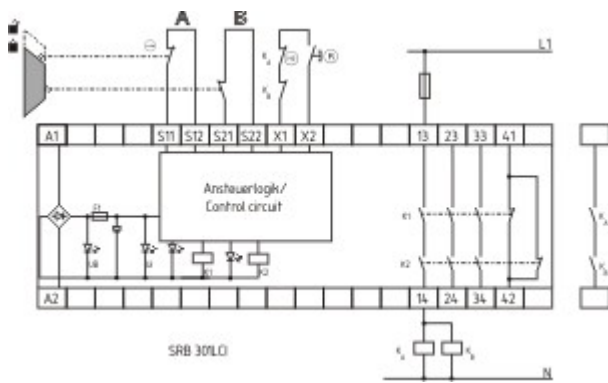

Wiring example

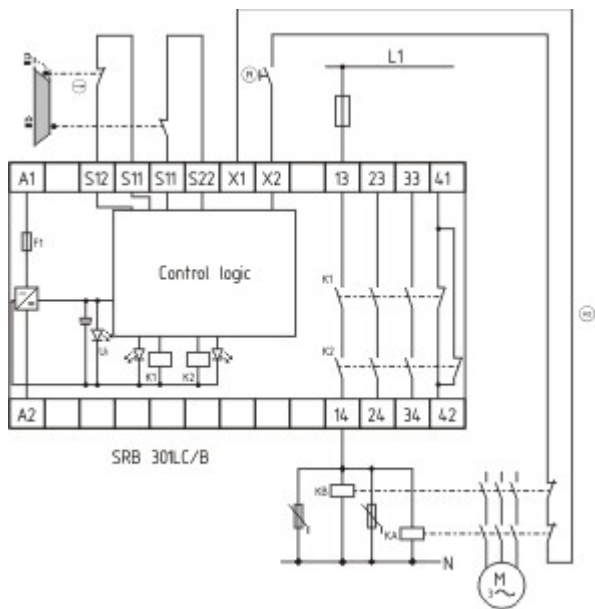

Wiring example

K.A. Schmersal GmbH & Co. KG, Möddinghofe 30, D-42279 Wuppertal  
 The data and values have been checked thoroughly. Technical modifications and errors excepted.  
 Generiert am 13.02.2019 - 13:03:29h Kasbase 3.3.0.F.64I