Inductive Sensor

Welding Field Resistant with Correction Factor 1

118A002

Part Number



- Extended temperature range
- Greatest possible switching distances with correction factor 1
- Very good magnetic and electromagnetic immunity
- Very high switching frequency

Welding field resistant inductive sensors with correction factor 1 offer a unique combination of technical performance features: increased switching distances for reliable object detection, high switching frequencies for applications with high process speeds and an extended temperature range for use under various ambient conditions. A switching status LED for diagnosis functions reduces system downtime. In order to simplify integration, all housing designs are available in flush or non-flush mounting variants.


Technical Data


Inductive Data				
Switching Distance	15 mm			
Correction Factors Stainless Steel V2A/CuZn/Al	-			
	, , , ,			
Mounting	non-flush			
Mounting A/B/C/D in mm	20/40/45/20			
Switching Hysteresis	< 15 %			
Electrical Data	40. 00.14.00			
Supply Voltage	1030 V DC			
Current Consumption (Ub = 24 V)	< 15 mA			
Switching Frequency	3500 Hz			
Temperature Drift (-25 °C < Tu < 60 °C)	10 %			
Temperature Drift (Tu < -25 °C, Tu > 60 °C)	20 %			
Temperature Range	-4080 °C			
Switching Output Voltage Drop	< 2,5 V			
Switching Output/Switching Current	ning Current 200 mA			
Resistant to Magnetic Fields	200 mT			
Short Circuit Protection	yes			
Reverse Polarity and Overload Protection	yes			
Protection Class	II			
Protective Insulation, Rated Voltage	100 V			
Mechanical Data				
Housing Material	CuZn; Teflon			
Welding Field Resistant	yes			
Full Encapsulation	yes			
Degree of Protection	IP67			
Connection	M12 × 1; 4-pin			
Safety-relevant Data				
MTTFd (EN ISO 13849-1)	2165,44 a			
Function				
Error Indicator	yes			
PNP NO/NC antivalent	•			
Connection Diagram No.	101			
Suitable Connection Technology No.	2			
Suitable Mounting Technology No.	150 153			

Complementary Products

PNP-NPN Converter BG2V1P-N-2M



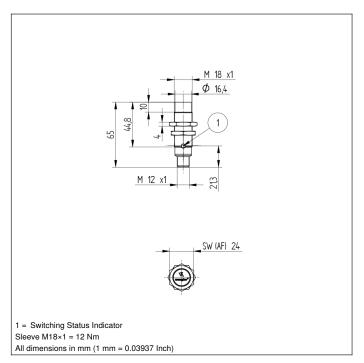



Legend		PT	Platinum measuring resistor	ENA	Encoder A
+	Supply Voltage +	nc	not connected	ENB	Encoder B
-	Supply Voltage 0 V	U	Test Input	Amin	Digital output MIN
~	Supply Voltage (AC Voltage)	Ū	Test Input inverted	Амах	Digital output MAX
Α	Switching Output (NO)	W	Trigger Input	Аок	Digital output OK
Ā	Switching Output (NC)	0	Analog Output	SY In	Synchronization In
V	Contamination/Error Output (NO)	0-	Ground for the Analog Output	SY OUT	
V	Contamination/Error Output (NC)	BZ	Block Discharge	OLT	Brightness output
E	Input (analog or digital)	Awv	Valve Output	М	Maintenance
Т	Teach Input	а	Valve Control Output +		
Z	Time Delay (activation)	b	Valve Control Output 0 V		
S	Shielding	SY	Synchronization	Wire Colors according to	
RxD	Interface Receive Path	E+	Receiver-Line	DIN IEC 757	
TxD	Interface Send Path	S+	Emitter-Line	BK	Black
RDY	Ready	÷	Grounding	BN	Brown
GND	Ground	SnR	Switching Distance Reduction	RD	Red
CL	Clock	Rx+/-	Ethernet Receive Path	OG	Orange
E/A	Output/Input programmable	Tx+/-	Ethernet Send Path	YE	Yellow
•	IO-Link	Bus	Interfaces-Bus A(+)/B(-)	GN	Green
PoE	Power over Ethernet	La	Emitted Light disengageable	BU	Blue
IN	Safety Input	Mag	Magnet activation	VT	Violet
OSSD	Safety Output	RES	Input confirmation	GY	Grey
Signal	Signal Output	EDM	Contactor Monitoring	WH	White
BI_D+/-	Ethernet Gigabit bidirect. data line (A-D	ENARS422	Encoder A/Ā (TTL)	PK	Pink
ENors42	Encoder 0-pulse 0-0 (TTL)	ENBR5422	Encoder B/B (TTL)	GNYE	Green/Yellow

Mounting

