

Datasheet - SRB220XV2 / V.2



Guard door monitors and Safety control modules for Emergency Stop applications / General Purpose safety controllers (Series PROTECT SRB) / SRB220XV2 / V.2

Preferred typ



- Suitable for signal processing of potential-free outputs, e.g. emergency stop command devices, position switches and solenoid interlocks
- Suitable for signal processing of outputs connected to potentials (AOPDs), e.g. safety light grids/curtains
- 2 safety contacts, STOP 0; 2 safety contacts, STOP 1

(Minor differences between the printed image and the original product may exist!)

Ordering details

| | |
|-----------------------------------|-----------------|
| Product type description | SRB220XV2 / V.2 |
| Article number | 101195578 |
| EAN Code | 4250116202188 |
| Replaced article number 101188429 | |
| eCl@ss | 27-37-19-01 |

Approval

Approval




Classification

| | |
|------------------|---|
| Standards | EN ISO 13849-1, IEC 61508, EN 60947-5-1 |
| PL | up e (STOP 0) bis d (STOP 1) |
| Control category | up 4 (STOP 0) up 3 (STOP 1) |
| DC | 99% (STOP 0) > 60% (STOP 1) |
| CCF | > 65 points |

| PFH value | ≤ 2,0 x 10 ⁻⁸ /h (STOP 0) ≤ 2,0 x 10 ⁻⁷ /h (STOP 1) | | | | | | | | | | | | | | | | | | |
|--------------|---|----------|--------|---------|------|---------|---------|------|---------|---------|------|--------|---------|------|--------|----------|-------|--------|----------|
| SIL | up 3 (STOP 0) up 2 (STOP 1) | | | | | | | | | | | | | | | | | | |
| Mission time | 20 Years | | | | | | | | | | | | | | | | | | |
| - notice | The PFH value is applicable for the combinations listed in the table for contact load (K) (current through enabling paths) and switching cycle number (n-op/y). In case of 365 operating days per year and a 24-hour operation, this results in the specified switching cycle times (t-cycle) for the relay contacts. Diverging applications on request. | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>K</th> <th>n-op/y</th> <th>t-cycle</th> </tr> </thead> <tbody> <tr> <td>20 %</td> <td>525.800</td> <td>1,0 min</td> </tr> <tr> <td>40 %</td> <td>210.240</td> <td>2,5 min</td> </tr> <tr> <td>60 %</td> <td>75.087</td> <td>7,0 min</td> </tr> <tr> <td>80 %</td> <td>30.918</td> <td>17,0 min</td> </tr> <tr> <td>100 %</td> <td>12.223</td> <td>43,0 min</td> </tr> </tbody> </table> | K | n-op/y | t-cycle | 20 % | 525.800 | 1,0 min | 40 % | 210.240 | 2,5 min | 60 % | 75.087 | 7,0 min | 80 % | 30.918 | 17,0 min | 100 % | 12.223 | 43,0 min |
| K | n-op/y | t-cycle | | | | | | | | | | | | | | | | | |
| 20 % | 525.800 | 1,0 min | | | | | | | | | | | | | | | | | |
| 40 % | 210.240 | 2,5 min | | | | | | | | | | | | | | | | | |
| 60 % | 75.087 | 7,0 min | | | | | | | | | | | | | | | | | |
| 80 % | 30.918 | 17,0 min | | | | | | | | | | | | | | | | | |
| 100 % | 12.223 | 43,0 min | | | | | | | | | | | | | | | | | |

Global Properties

| | |
|--|---|
| Permanent light | SRB220XV2 / V.2 |
| Standards | IEC/EN 60204-1, EN 60947-5-1, EN ISO 13849-1, IEC 61508 |
| Compliance with the Directives (Y/N)  | Yes |
| Climatic stress | EN 60068-2-78 |
| Mounting | snaps onto standard DIN rail to EN 60715 |
| Terminal designations | IEC/EN 60947-1 |
| Materials | |
| - Material of the housings | Plastic, glass-fibre reinforced thermoplastic, ventilated |
| - Material of the contacts | AgSn0, Ag-Ni, self-cleaning, positive action |
| Weight | 475 |
| Start conditions | Automatic or Start button (Optional monitored) |
| Start input (Y/N) | Yes |
| Feedback circuit (Y/N) | Yes |
| Start-up test (Y/N) | No |
| Reset after disconnection of supply voltage (Y/N) | No |
| Automatic reset function (Y/N) | Yes |
| Reset with edge detection (Y/N) | Yes |
| Pull-in delay | |
| - ON delay with reset button | typ. 20 ms |
| Drop-out delay | |
| - Drop-out delay in case of power failure | typ. 50 ms |
| - Drop-out delay in case of emergency stop | ≤ 25 ms |

Mechanical data

| | |
|---|---------------------------------------|
| Connection type | Screw connection |
| Cable section | |
| - Min. Cable section | 0,25 |
| - Max. Cable section | 2.5 |
| Pre-wired cable | rigid or flexible |
| Tightening torque for the terminals | 0,6 |
| Detachable terminals (Y/N) | No |
| Mechanical life | 10.000.000 operations |
| Electrical lifetime | Derating curve available on request |
| restistance to shock | 30 g / 11 ms |
| Resistance to vibration To EN 60068-2-6 | 10...55 HZ, Amplitude 0,35 mm, ± 15 % |

Ambient conditions

Ambient temperature

- Min. environmental temperature -25 °C
- Max. environmental temperature +60 °C

Storage and transport temperature

- Min. Storage and transport temperature -40 °C
- Max. Storage and transport temperature +85 °C

Protection class

- Protection class-Enclosure IP40
- Protection class-Terminals IP20
- Protection class-Clearance IP54

Air clearances and creepage distances To IEC/EN 60664-1

- Rated impulse withstand voltage U_{imp} 4 kV
- Overvoltage category II To VDE 0110
- Degree of pollution 2 To VDE 0110

Electromagnetic compatibility (EMC)

EMC rating conforming to EMC Directive

Electrical data

Rated DC voltage for controls

- Max. rated DC voltage for controls 20.4
- Max. rated DC voltage for controls 28.8

Rated AC voltage for controls, 50 Hz

- Min. rated AC voltage for controls, 50 Hz 20.4
- Max. rated AC voltage for controls, 50 Hz 26.4

Rated AC voltage for controls, 60 Hz

- Min. rated AC voltage for controls, 60 Hz 20.4
- Max. rated AC voltage for controls, 60 Hz 26.4

Contact resistance

max. 100 mΩ

Power consumption

max. 2.6 W; 5.4 VA

Type of actuation

AC/DC

Rated operating voltage U_e

24 VDC -15% / +20%, residual ripple max. 10 %
24 VAC -15% / +10%

Frequency range

50 / 60 HZ

Electronic protection (Y/N)

Yes

Fuse rating for the operating voltage

Internal electronic trip, tripping current > 1.0 A, Reset after disconnection of supply voltage

Inputs

Monitored inputs

- Short-circuit recognition (Y/N) optional
- Wire breakage detection (Y/N) Yes
- Earth connection detection (Y/N) Yes

Number of shutters

0 piece

Number of openers

2 piece

Cable length

1500 m with 1.5 mm²;
2500 m with 2.5 mm²

Conduction resistance

max. 40 Ω

Outputs

| | |
|--|--|
| Stop category | 0 / 1 |
| Number of safety contacts | 4 piece |
| Number of auxiliary contacts | 0 piece |
| Number of signalling outputs | 0 piece |
| Switching capacity | |
| - Switching capacity of the safety contacts | max. 250 V, 8 A ohmic (inductive in case of appropriate protective wiring) |
| Fuse rating | |
| - Protection of the safety contacts | 8 A slow blow |
| Utilisation category To EN 60947-5-1 | |
| - Stop category 0 | 13-14, 23-24: AC-15: 230 V / 6 A DC-13: 24 V / 6 A |
| - Stop category 1 | 37/38, 47 - 48: AC-15: 230 V / 3 A DC-13: 24 V / 2 A |
| Number of undelayed semi-conductor outputs with signaling function | 0 piece |
| Number of undelayed outputs with signaling function (with contact) | 0 piece |
| Number of delayed semi-conductor outputs with signaling function. | 0 piece |
| Number of delayed outputs with signalling function (with contact). | 0 piece |
| Number of secure undelayed semi-conductor outputs with signaling function | 0 piece |
| Number of secure, undelayed outputs with signaling function, with contact. | 2 piece |
| Number of secure, delayed semi-conductor outputs with signaling function | 0 piece |
| Number of secure, delayed outputs with signaling function (with contact). | 2 piece |

LED switching conditions display

| | |
|--|-----|
| LED switching conditions display (Y/N) | Yes |
| Number of LED's | 5 |
| LED switching conditions display | |
| - The integrated LEDs indicate the following operating states. | |
| - Position relay K1 | |
| - Position relay K4 | |
| - Position relay K3 | |
| - Position relay K2 | |
| - Supply voltage | |
| - Internal operating voltage Ui | |

Miscellaneous data

| | |
|--------------|--|
| Applications |  Emergency-Stop button  Pull-wire emergency stop switches  Guard system  Safety light curtain |
|--------------|--|

Dimensions

| | |
|------------|-------|
| Dimensions | |
| - Width | 45 mm |

| | |
|----------|--------|
| - Height | 100 mm |
| - Depth | 121 mm |

notice

Inductive loads (e.g. contactors, relays, etc.) are to be suppressed by means of a suitable circuit.

notice - Wiring example

2 channel control shown for a guard-door monitor with two contacts, of which at least one contact has positive break, with external reset button (R).
Relay outputs: Suitable for 2 channel control, for increase in capacity or number of contacts by means of contactors or relays with positive-guided contacts.

(H2) = Feedback circuit

The control recognises cross-short, cable break and earth leakages in the monitoring circuit.

The time-delayed safety outputs 37-38 and 47-48 meet the requirements of STOP category 1 to EN 60204-1. The non-delayed safety outputs meet the requirements of STOP category 0 to EN 60204-1.

Setting of the drop-out delay time is carried out by means of a DIP switch from the front of the enclosure.

The wiring diagram is shown with guard doors closed and in de-energised condition.

Documents

Operating instructions and Declaration of conformity (nl) 611 kB, 12.07.2018

Code: mrl_srb_220xv2_v2_nl

Operating instructions and Declaration of conformity (pt) 632 kB, 05.01.2018

Code: mrl_srb_220xv2_v2_pt

Operating instructions and Declaration of conformity (pl) 697 kB, 23.05.2018

Code: mrl_srb_220xv2_v2_pl

Operating instructions and Declaration of conformity (es) 618 kB, 05.01.2018

Code: mrl_srb_220xv2_v2_es

Operating instructions and Declaration of conformity (de) 593 kB, 24.11.2017

Code: mrl_srb_220xv2_v2_de

Operating instructions and Declaration of conformity (fr) 614 kB, 07.03.2018

Code: mrl_srb_220xv2_v2_fr

Operating instructions and Declaration of conformity (jp) 694 kB, 17.10.2014

Code: mrl_srb_220xv2_v2_jp

Operating instructions and Declaration of conformity (it) 612 kB, 05.01.2018

Code: mrl_srb_220xv2_v2_it

Operating instructions and Declaration of conformity (en) 592 kB, 24.11.2017

Code: mrl_srb_220xv2_v2_en

Operating instructions and Declaration of conformity (da) 677 kB, 27.08.2013


Code: mrl_srb_220xv2_v2_da

Wiring example (99) 19 kB, 04.08.2008

Code: ksr2112

EAC certification (ru) 1 MB, 15.03.2018

Images

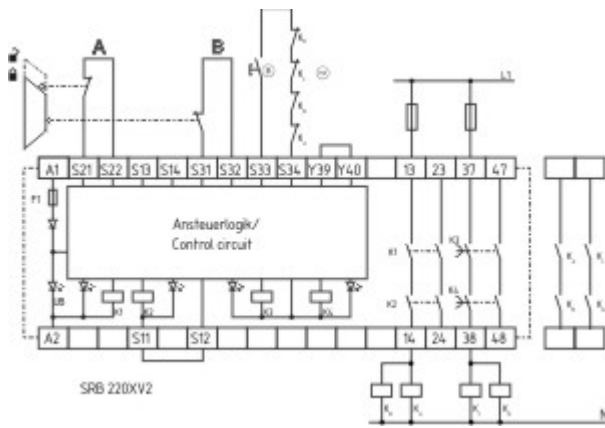

Wiring example

K.A. Schmersal GmbH & Co. KG, Möddinghofe 30, D-42279 Wuppertal

The data and values have been checked thoroughly. Technical modifications and errors excepted.

Generiert am 13.02.2019 - 13:03:20h Kasbase 3.3.0.F.64I