


Datasheet - IFL 50-385-10/01D

Inductive proximity switch / Housing construction form: Block / IFL 385



- Design 385
- 3 Cable entry M 20 x 1.5
- Thermoplastic enclosure
- DC 2-wire
- Double-insulated 

(Minor differences between the printed image and the original product may exist!)

Ordering details


Product type description	IFL 50-385-10/01D
Article number	101126029
EAN Code	4030661277691
eCl@ss	27-27-01-01

Approval

Approval



Global Properties

Permanent light	IFL - 385
Standards	IEC/EN 60947-5-2; DIN VDE 0660-208
Compliance with the Directives (Y/N) 	Yes
Operating resource protection class	Protection class 2
Materials	
- Material of the housings	Plastic
Housing coating	None
Housing construction form	Block
Weight	378

Mechanical data

Design of electrical connection	Screw connection
Conductor with strain relief	No
Cable section	
- Min. Cable section	
- Max. Cable section	2 x 1.5
mechanical installation conditions	not flush
Switch distance S_n	50 mm
Reduction factor 1 met (Y/N)	No
Protection circuit	inductive interference protection, short-circuit and overload proof, Protection against polarity reversal
Pressure resistant (Y/N)	No
• Wiring compartment	

Ambient conditions

Ambient temperature	
- Min. environmental temperature	-25
- Max. environmental temperature	+70
Protection class	IP67 to IEC/EN 60529

Electrical data

Design of control element	Normally open contact (NO) or Opener (NC)
Number of wire	2
Voltage type	DC, direct current
Supply voltage U_B	
- Min. supply voltage	10
- Max. supply voltage	40
Switch frequency	approx. 50 HZ
Voltage drop U_d	$\leq 6 \text{ V (200 mA)}$, $\leq 5.5 \text{ V (100 mA)}$
Residual current I_r	approx. 0,5 mA
Minimum operating current I_m	5 mA
Operating current I_e	200 mA

Outputs

Design of control output	Two-wire
--------------------------	----------

LED switching conditions display

LED switching conditions display (Y/N)	Yes
- yellow LED	

ATEX

Explosion protection categories for gases	None
Explosion protected category for dusts	None


Dimensions

Dimensions of the sensor	
- Width of sensor	80
- Height of sensor	40
- Length of sensor	135






notice

Mounting angle HW 385-1 to simplify mounting available
Programmable by repositioning the plug-in jumper at the terminal screws

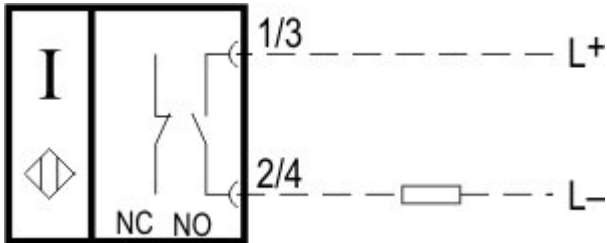Diagram



Note Diagram

-  positive break NC contact
-  active
-  no active
-  Normally-open contact
-  Normally-closed contact

Ordering code

IFL (1)-(2)-(3)(4)(5)(6)(7)

(1)	50	Switch distance 50 mm
(2)	385	Block Design, 135 x 80 x 40 mm
(3)	01	Opener (NC)
	10	Normally open contact (NO)
	10/01	Normally open contact (NO) / Opener (NC) with Wiring compartment
	11	Normally open contact (NO) / Opener (NC) antivalent
(4)	without	Cable
	D	DC 2-wire
(5)	Z	Protection class IP67
(6)	N	n-type
	P	p-type
(7)	2130	Max. +130°C, without LED switching conditions display

Documents

Operating instructions (nl) 134 kB, 01.08.2018

Code: mrl_ifl-allgemein_nl

Operating instructions (en) 128 kB, 31.08.2016

Code: mrl_ifl-allgemein_en

Operating instructions (pl) 137 kB, 21.10.2016

Code: mrl_ifl-allgemein_pl

Operating instructions (pt) 109 kB, 06.04.2017

Code: mrl_ifl-allgemein_pt

Operating instructions (it) 108 kB, 21.10.2016

Code: mrl_ifl-allgemein_it

Operating instructions (es) 110 kB, 21.10.2016

Code: mrl_ifl-allgemein_es

Operating instructions (cn) 177 kB, 05.05.2017

Code: mrl_ifl-allgemein_cn

Operating instructions (de) 131 kB, 31.08.2016

Code: mrl_ifl-allgemein_de

Operating instructions (fr) 110 kB, 21.10.2016

Code: mrl_ifl-allgemein_fr

Declaration of conformity (en) 91 kB, 13.04.2017

Code: konfi_ifl_en

Declaration of conformity (de) 96 kB, 01.07.2016

Code: konfi_ifl_de


CCC certification (en) 4 MB, 11.07.2018

Code: q_iflp01


CCC certification (cn) 4 MB, 11.07.2018

Code: q_iflp04

Images

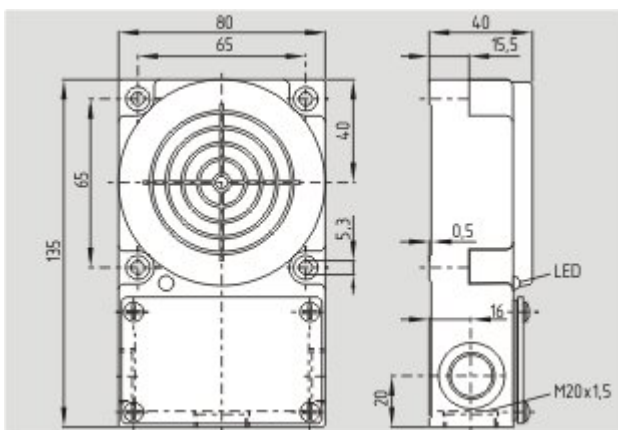

Dimensional drawing (basic component)

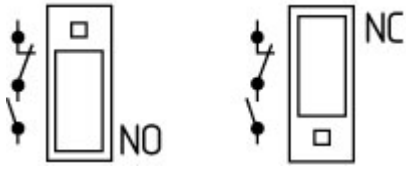

Operating principle

K.A. Schmersal GmbH & Co. KG, Mödinghofe 30, D-42279 Wuppertal

The data and values have been checked thoroughly. Technical modifications and errors excepted.

Generiert am 13.02.2019 - 13:06:19h Kasbase 3.3.0.F.64I