

Datasheet - SRB400CS 24VDC



Guard door monitors and Safety control modules for Emergency Stop applications / General Purpose safety controllers (Series PROTECT SRB) / SRB400C.

Preferred typ



- Two-functions safety monitoring module (double evaluation)
- 2 x 2 enabling paths with different shut-down behaviour, e.g. emergency exit opens both enabling paths (level 1); guard door monitoring only opens the second enabling path (level 2)
- Suitable for signal processing of potential-free contacts, e.g. Emergency Stop command devices (level 1), position switches with safety function, solenoid interlocks and safety sensors (level 2)
- Level 1: Reset without edge detection, Optional Automatic reset function, Level 2: / Opener (NC) Opener (NC)

(Minor differences between the printed image and the original product may exist!)

Ordering details

Product type description	SRB400CS 24VDC
Article number	101176209
EAN Code	4250116201938
Replaced article number	101177160
eCl@ss	27-37-19-01

Approval

Approval



Classification

Standards	EN ISO 13849-1, IEC 61508, EN 60947-5-1
PL	up e (STOP 0)
Control category	up 4 (STOP 0)
DC	99% (STOP 0)
CCF	> 65 points
PFH value	$\leq 2,0 \times 10^{-8}/h$ (STOP 0)
SIL	up 3 (STOP 0)

Mission time

- notice

20 Years

The PFH value is applicable for the combinations listed in the table for contact load (K) (current through enabling paths) and switching cycle number (n-op/y).

In case of 365 operating days per year and a 24-hour operation, this results in the specified switching cycle times (t-cycle) for the relay contacts.

Diverging applications on request.

K	n-op/y	t-cycle
20 %	525.800	1,0 min
40 %	210.240	2,5 min
60 %	75.067	7,0 min
80 %	30.918	17,0 min
100 %	12.223	43,0 min

Global Properties

Permanent light

SRB400CS 24VDC

Standards

IEC/EN 60204-1, EN 60947-5-1, EN ISO 13849-1, IEC 61508

Compliance with the Directives (Y/N) 

Yes

Climatic stress

EN 60068-2-78

Mounting

snaps onto standard DIN rail to EN 60715

Terminal designations

IEC/EN 60947-1

Materials

- Material of the housings

Plastic, glass-fibre reinforced thermoplastic, ventilated

- Material of the contacts

Ag-Ni, self-cleaning, positive action

Weight

346

Start conditions

Automatic or Start button

Start input (Y/N)

Yes

Feedback circuit (Y/N)

Yes

Automatic reset function

Yes (Level 1)

Reset with edge detection (Y/N)

No

Pull-in delay

- ON delay with reset button

typ. 40 ms (Level 1)
typ. 500 ms (Level 2)

Drop-out delay

- Drop-out delay in case of emergency stop

typ. 50 ms

Mechanical data

Connection type

Screw connection

Cable section

- Min. Cable section

0,25

- Max. Cable section

2.5

Pre-wired cable

rigid or flexible

Tightening torque for the terminals

0,6

Detachable terminals (Y/N)

Yes

Mechanical life

10.000.000 operations

Electrical lifetime

Derating curve available on request

resistance to shock

10 g / 11 ms

Resistance to vibration To EN 60068-2-6

10...55 HZ, Amplitude 0,35 mm

Ambient conditions

Ambient temperature

- Min. environmental temperature

-25 °C

- Max. environmental temperature

+45 °C

Storage and transport temperature

- Min. Storage and transport temperature	-40 °C
- Max. Storage and transport temperature	+85 °C
Protection class	
- Protection class-Enclosure	IP40
- Protection class-Terminals	IP20
- Protection class-Clearance	IP54
Air clearances and creepage distances To IEC/EN 60664-1	
- Rated impulse withstand voltage U_{imp}	4 kV
- Overvoltage category	III To VDE 0110
- Degree of pollution	2 To VDE 0110

Electromagnetic compatibility (EMC)

EMC rating	conforming to EMC Directive
------------	-----------------------------

Electrical data

Rated DC voltage for controls	
- Max. rated DC voltage for controls	20.4 VDC
- Max. rated DC voltage for controls	28.8 VDC
Rated AC voltage for controls, 50 Hz	
- Min. rated AC voltage for controls, 50 Hz	-
- Max. rated AC voltage for controls, 50 Hz	-
Rated AC voltage for controls, 60 Hz	
- Min. rated AC voltage for controls, 60 Hz	-
- Max. rated AC voltage for controls, 60 Hz	-
Contact resistance	max. 100 mΩ
Power consumption	4.4
Type of actuation	DC
Rated operating voltage U_e	24 VDC -15% / +20%, residual ripple max. 10%
Operating current I_e	0,18 A
Electronic protection (Y/N)	Yes
Fuse rating for the operating voltage	Internal electronic trip, tripping current > 1.0 A, Reset after approximately 1 second/s
Current and tension on control circuits	
- S31, S32, S41, S42	26 VDC, Test current: 100 mA

Inputs

Monitored inputs

- Short-circuit recognition (Y/N)	No (Level 1)
- Wire breakage detection (Y/N)	Yes
- Earth connection detection (Y/N)	Yes
Number of shutters	2
Number of openers	2
Cable length	1-channel without cross-wire detection: 1500 m with 1.5 mm ² ; 2500 m with 2.5 mm ² ; 2-channel with/ without cross-wire detection
Conduction resistance	max. 40 Ω

Outputs

- Stop category 0	Residual current at ambient temperature up to: - 45°C = 18 A; - 55°C = 15 A; - 60°C = 12 A
-------------------	--

- Stop category 1	Residual current at ambient temperature up to: - 45°C = 12 A; - 55°C = 10 A; - 60°C = 8 A
Stop category	0
Number of safety contacts	4 piece
Number of auxiliary contacts	0 piece
Number of signalling outputs	0 piece
Switching capacity	
- Switching capacity of the safety contacts	max. 230 VAC, 4 A ohmic (inductive in case of appropriate protective wiring)
Fuse rating	
- Protection of the safety contacts	4 A slow blow
Utilisation category To EN 60947-5-1	AC-15: 230 V / 1,5 A DC-13: 24 V / 1,2 A
Note on the utilisation category	
Number of undelayed semi-conductor outputs with signaling function	0 piece
Number of undelayed outputs with signaling function (with contact)	0 piece
Number of delayed semi-conductor outputs with signaling function.	0 piece
Number of delayed outputs with signalling function (with contact).	0 piece
Number of secure undelayed semi-conductor outputs with signaling function	0 piece
Number of secure, undelayed outputs with signaling function, with contact.	4 piece
Number of secure, delayed semi-conductor outputs with signaling function	0 piece
Number of secure, delayed outputs with signaling function (with contact).	0 piece

LED switching conditions display

LED switching conditions display (Y/N)	Yes
Number of LED's	6
LED switching conditions display	
- The integrated LEDs indicate the following operating states.	
- Position relay K1	
- Position relay K4	
- Position relay K2	
- Position relay K3	
- Supply voltage	
- Internal operating voltage Ui	

Miscellaneous data

Applications	 Guard system  Emergency-Stop button  Pull-wire emergency stop switches  Safety sensor
--------------	---

Dimensions

Dimensions	
- Width	22.5 mm
- Height	100 mm
- Depth	121 mm

notice

Inductive loads (e.g. contactors, relays, etc.) are to be suppressed by means of a suitable circuit.

notice - Wiring example

Input level: the example shows a 2-channel control of an Emergency Stop command device (level 1) with external reset button (R), and guard door monitoring (level 2) with feedback circuit (H2).

The control recognises cross-short, cable break and earth leakages in the monitoring circuit.

Relay outputs: Suitable for 2 channel control, for increase in capacity or number of contacts by means of contactors or relays with positive-guided contacts.

Automatic start:

Level 1: the automatic start is programmed by connecting the feedback circuit to the terminals X1/+24VDC.

Level 2: the automatic start is programmed by connecting the feedback circuit to the terminals X2/+24VDC.

If the feedback circuit is not required, establish a bridge

The wiring diagram is shown with guard doors closed and in de-energised condition.

Documents

Operating instructions and Declaration of conformity (pt) 918 kB, 29.11.2017

Code: mrl_srb400c_pt

Operating instructions and Declaration of conformity (nl) 912 kB, 29.11.2017

Code: mrl_srb400c_nl

Operating instructions and Declaration of conformity (jp) 1 MB, 15.04.2014

Code: mrl_srb400c_jp

Operating instructions and Declaration of conformity (es) 912 kB, 23.11.2017

Code: mrl_srb400c_es

Operating instructions and Declaration of conformity (pl) 934 kB, 29.11.2017

Code: mrl_srb400c_pl

Operating instructions and Declaration of conformity (de) 897 kB, 15.11.2017

Code: mrl_srb400c_de

Operating instructions and Declaration of conformity (fr) 914 kB, 24.11.2017

Code: mrl_srb400c_fr

Operating instructions and Declaration of conformity (da) 913 kB, 21.11.2017

Code: mrl_srb400c_da

Operating instructions and Declaration of conformity (it) 913 kB, 29.11.2017

Code: mrl_srb400c_it

Operating instructions and Declaration of conformity (en) 892 kB, 15.11.2017

Code: mrl_srb400c_en


Wiring example (99) 21 kB, 04.08.2008

Code: ksr401


EAC certification (ru) 1 MB, 15.03.2018

Code: q_aesp01

Images

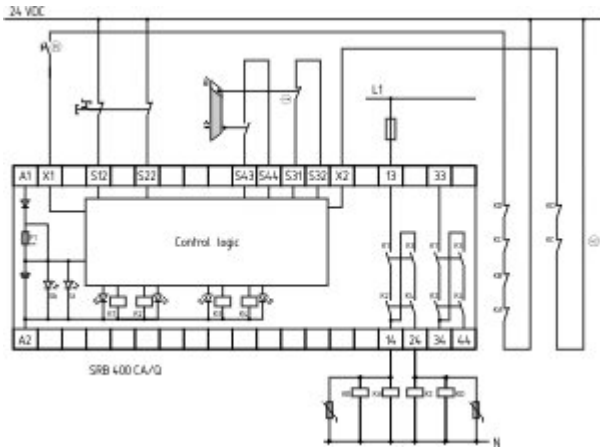

Wiring example

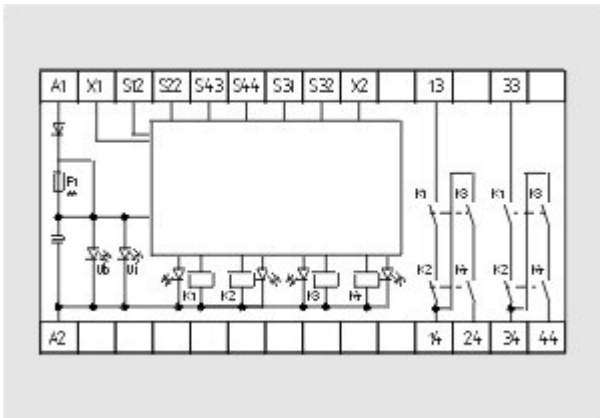

Internal wiring diagram

K.A. Schmersal GmbH & Co. KG, Mödinghofe 30, D-42279 Wuppertal

The data and values have been checked thoroughly. Technical modifications and errors excepted.

Generiert am 13.02.2019 - 13:03:51h Kasbase 3.3.0.F.64I