

# Digital Camera

## BKS0C0A40

Part Number




- Rugged aluminium housing
- Simple installation and alignment
- Standard thread - various lenses can be attached

### Technical Data

Optical Data	
Resolution	1280 × 1024 Pixel
Pixel Size	5,3 × 5,3 μm
Image Chip	color
Image chip size	1/1,8"
Frame Rate	> 50 fps
Electrical Data	
Supply Voltage	12...26 V DC
Current Consumption (U <sub>b</sub> = 24 V)	< 200 mA
Electrical Isolation	yes
Temperature Range	-5...50 °C
Flash Outputs	1
Flash Output	Optoisolator
Number of trigger inputs	1
Trigger Input	Optoisolator
Protection Class	III
Mechanical Data	
Lens thread	C-Mount
Housing Material	Aluminum
Weight	108 g
Degree of Protection	IP30
Connection	HR10; 6-pin
Function	
Bayer Pattern	yes
Global Shutter	yes
Subsampling	yes
Connection Table No.	<b>56</b>
Suitable Connection Technology No.	<b>84</b>
Suitable Mounting Technology No.	<b>560</b>

With its compact aluminium housing, the CMOS camera is highly versatile, even in extremely tight spaces. The camera can be quickly and easily secured and adjusted with the wenglor mounting system.

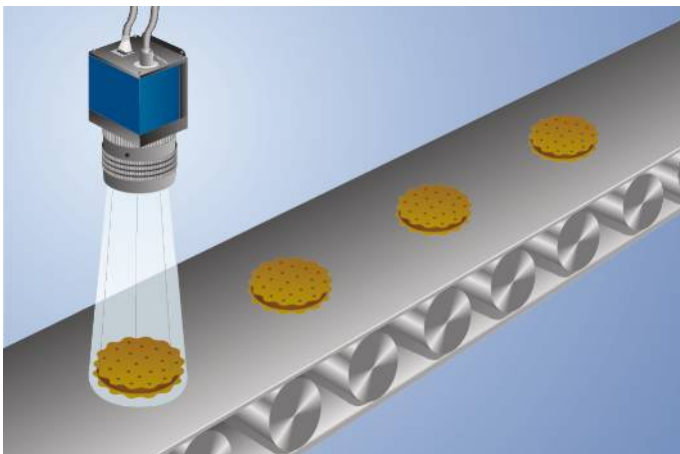

### Complementary Products

Control Unit BVC0A0A31
Illumination Technology
Lens LAC25-14-K02
Protective Housing ZSV-02-02

