

EC2076

RS 232
 Programmieradapter

mit
 Gender Changer
 zur Stift-Buchse
 Umsetzung

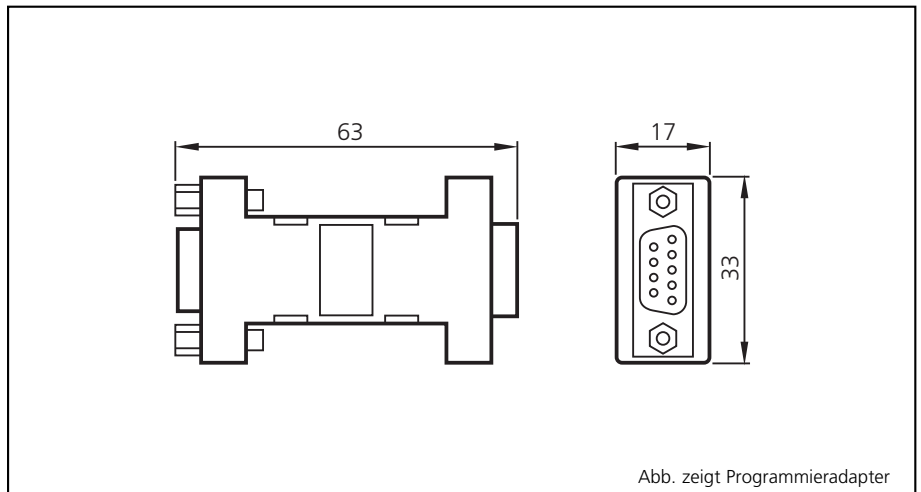


Abb. zeigt Programmieradapter

Technische Daten

Programmieradapter


Anschlüsse

Hinweis

Anschlussbelegung

2 x 9-pol. D-SUB-Stecker (Stift/Stift)

Im „RUN“-Betriebsmodus muss der Adapter entfernt werden.

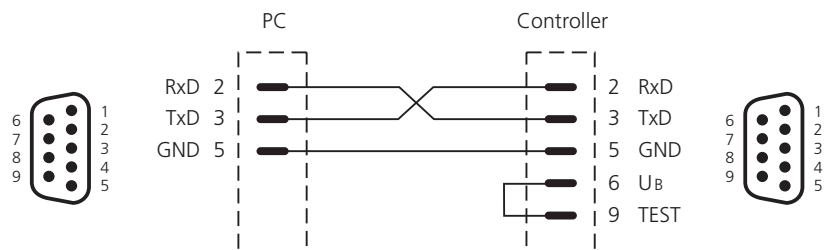

Gender Changer

Anschlüsse

Anschlussbelegung

2 x 9-pol. D-SUB-Stecker (Buchse/Buchse)

Kontakte sind 1:1 durchverbunden

Einsatzmöglichkeiten
 in Verbindung mit
 Schnittstellenkabel EC2063

für Art.-Nr.	EC2063 Schnittstellenkabel	EC2076 Programmieradapter	EC2076 Gender Changer
CR105x	•	•	•
CR030x	•	•	–
CR3103/4	•	–	–

• = wird zur Programmierung, Konfiguration, etc. benötigt



EC2076

RS 232
Programming adapter

with
gender changer
for pin-socket
conversion

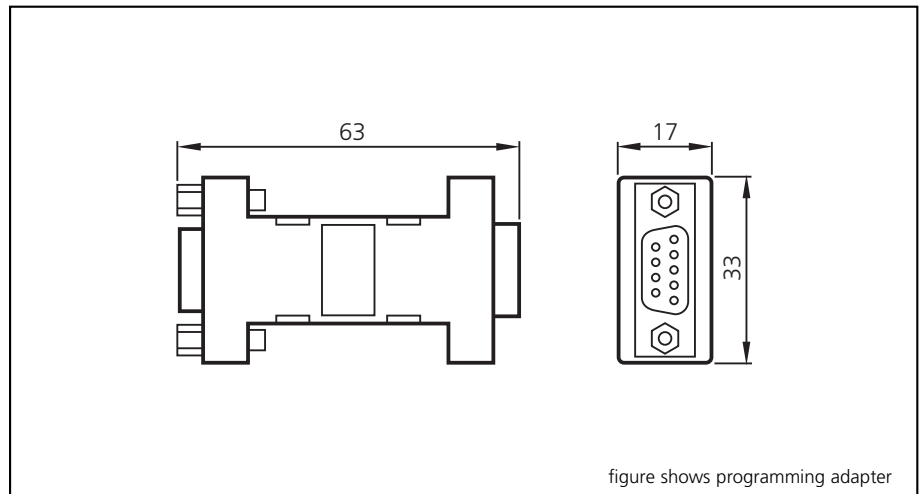


figure shows programming adapter

Technical data

Programming adapter


Connections

Note

Pin connection

2 x 9-pole D-SUB connector (pin/pin)

In the operating mode "run" the adapter must be removed.

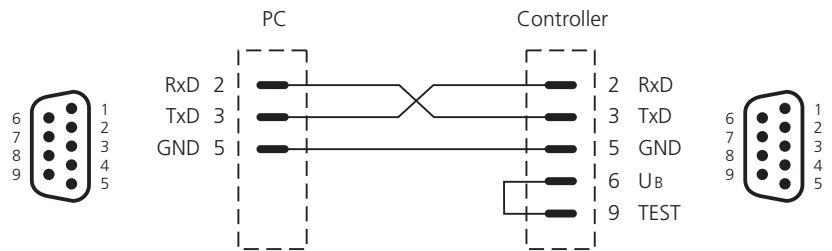

Gender Changer

Connections

Pin connection

2 x 9-pole D-SUB connector (socket/socket)

contacts have straight through connection 1:1

Applications in connection
with interface cable EC2063

for art. no.	EC2063 interface cable	EC2076 programming adapter	EC2076 gender changer
CR105x	•	•	•
CR030x	•	•	–
CR3103/4	•	–	–

• = required for programming, configuration, etc.