

M12-DISTRIBUTOR BOX 8-WAY, 5-POLE WITHOUT LED

MVC8-UE10.0-XA 10m PVC-CNOMO-cable 16x0,34/3x1

8-way, 5-pole
PVC (CNOMO)
10.0 m
without LED, up to 125 V AC/DC


Further cable lengths on request.

[Link to Product](#)

Illustration



M12 Females 5-pole

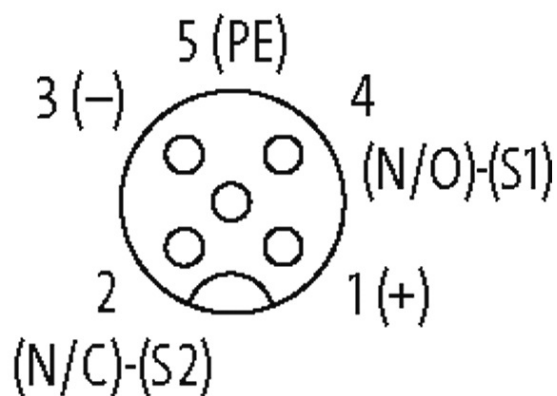

Product may differ from Image

Contact Layout

PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/19

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

PIN 5	(Earth)
Cables	
No./diameter of wires	16×0.34 + 3×1.0 mm ²
Material (jacket)	PVC
Outer Ø	11.0 mm ±5%
Bend radius (moving)	15 × outer Ø
Technical Data	
Operating voltage	24 V DC
Signal per port	2
Operating current per contact	max. 4 A
Total current	max. 10 A
Locking of ports	Screw thread M12 × 1 mm
General data	
Protection	IP67 inserted and tightened (EN 60529)
Dimensions H × W × D	127×54×29 mm
Temperature range	-20...+80 °C
Commercial data	
country of origin	CZ
customs tariff number	85444290
EAN	4048879062299
eClass	27279219
Packaging unit	1