

## M12-DISTRIBUTOR BOX 8-WAY, 5-POLE WITHOUT LED

MVC8-UQQ5.0-XA 5m PUR-CNOMO-cable 16x0,34/3x1

8-way, 5-pole  
PUR/PVC (CNOMO)  
5.0 m  
without LED


Further cable lengths on request.

### [Link to Product](#)

#### Illustration



M12 Females 5-pole

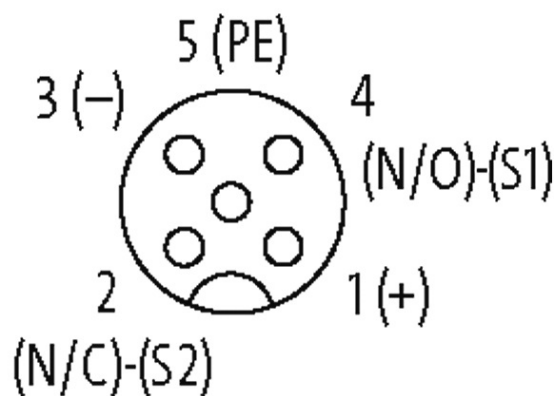

Product may differ from Image

#### Contact Layout

PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)

PIN 5	(Earth)
<b>Cables</b>	
No./diameter of wires	16×0.34 + 3×1.0 mm <sup>2</sup>
Material (jacket)	PUR/PVC
Outer Ø	11.0 mm ±5%
Bend radius (moving)	15 × outer Ø
<b>Technical Data</b>	
Operating voltage	24 V DC
Operating current per contact	max. 4 A
Total current	max. 10 A
Signal per port	2
Locking of ports	Screw thread M12 × 1 mm
<b>General data</b>	
Protection	IP67 inserted and tightened (EN 60529)
Dimensions H × W × D	127×54×29 mm
Temperature range	-20...+80 °C
<b>Commercial data</b>	
country of origin	CZ
customs tariff number	85444290
EAN	4048879000208
eClass	27279219
Packaging unit	1