
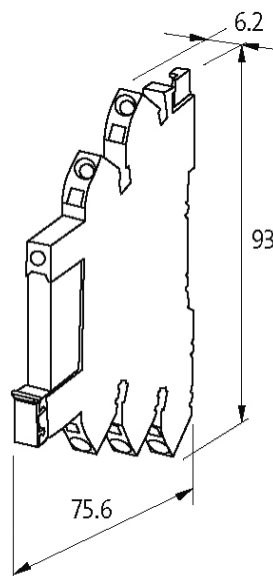


MIRO 6.2 PLUGGABLE COMPL.MODULE INPUT RELAY

IN: 24 VAC/DC - OUT: 250 VAC/DC / 6 A


1 NO/NC contact
24 V AC/DC
Spring clamp terminals

[Link to Product](#)**Illustration**

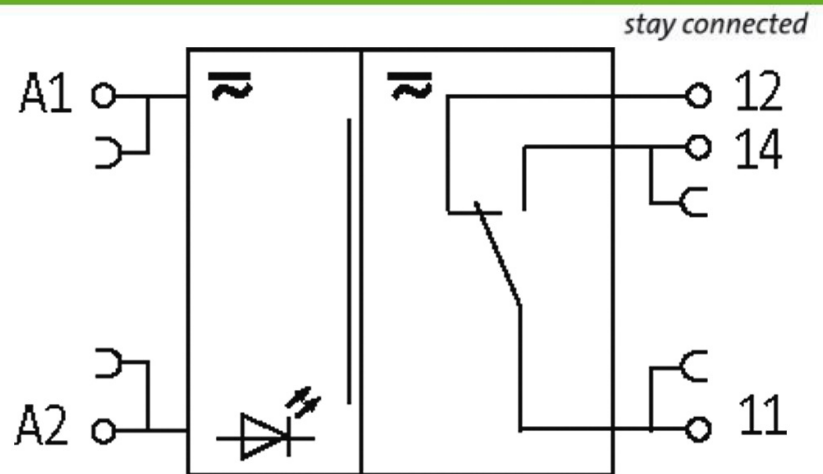

Product may differ from Image

Approvals

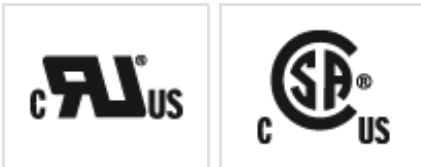

Input

Connection voltage - current	24 V AC/DC (19.2...26.8 V AC/DC) - 14 mA
LED display	LED (green)

Utilization category

AC-12	6 A (24/110/230 V AC)
AC-15	3 A (24/110 V AC); 1.5 A (230 V AC)
DC-13	1 A (24 V DC); 0.2 A (110 V DC); 0.1 A (230 V DC)

General data

Test isolation voltage	250 V
Mech./ elect. life	10 000 000 switching cycles (NO) 30 000; (NC) 10 000, load dependent
Protection	IP20
Mounting method	DIN-rail mountable (EN 60715)
Dimensions H x W x D	93x6.2x75.6 mm
Temperature range	-25...+60 °C

Output

Switching voltage	max. 250 V AC/30 V DC
Switching current per output	max. 6 A
Min. load current	10 mA
Power rating (voltage dependent)	max. 1 500 VA/180 W
Switching frequency	max. 10 Hz
Contact material	Ag Sn O ₂ , gold plated
Energize/release/contact bounce time	8/4/- ms

Commercial data

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/19

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

country of origin	CN
customs tariff number	85364900
EAN	4048879021401
eClass	27371601
Packaging unit	1