
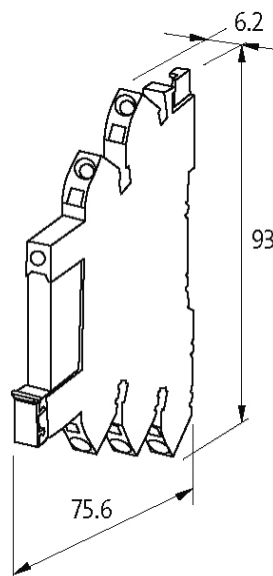


**MIRO 6.2 PLUGGABLE COMPL.MODULE OUTPUT RELAY**

IN: 12 VAC/DC - OUT: 250 VAC/DC / 6 A


1 NO/NC contact  
12 V AC/DC  
Spring clamp terminals

[Link to Product](#)**Illustration**

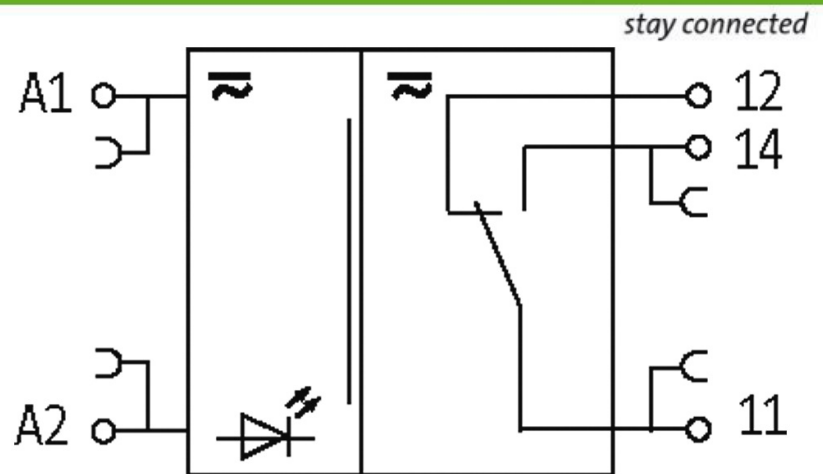

Product may differ from Image

### Approvals

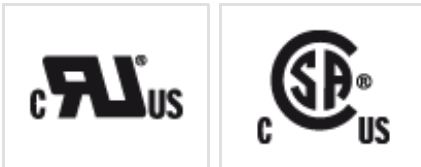

### Input

Connection voltage - current 9.8...14 V AC/DC - approx. 14.2 mA

LED display LED (green)

### Utilization category

AC-12 6 A (24/110/230 V AC)

AC-15 3 A (24/110 V AC); 1.5 A (230 V AC)

DC-13 1 A (24 V DC); 0.2 A (110 V DC); 0.1 A (230 V DC)

### General data

Test isolation voltage 250 V

Mech./ elect. life 10 000 000 switching cycles (NO) 30 000; (NC) 10 000, load dependent

Protection IP20

Mounting method DIN-rail mountable (EN 60715)

Dimensions H x W x D 93x6.2x75.6 mm

Temperature range -25...+60 °C

### Output

Switching voltage max. 250 V AC/30 V DC

Switching current per output max. 6 A

Min. load current 100 mA

Power rating (voltage dependent) max. 1 500 VA/180 W

Switching frequency max. 10 Hz

Contact material Ag Sn O<sub>2</sub>

Energize/release/contact bounce time 8/4/- ms

### Commercial data

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/19

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

country of origin	CN
customs tariff number	85364900
EAN	4048879021340
eClass	27371601
Packaging unit	1