


MIRO 6.2 TIMER


Impulsverlängerung 24 VDC / 25 mA / 45 ms

Transistor output

Impulse expansion: 40...45 ms

Spring clamp terminals

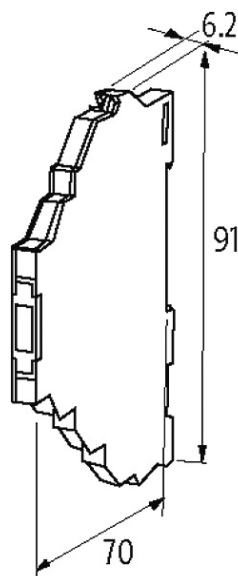[Link to Product](#)**Illustration**

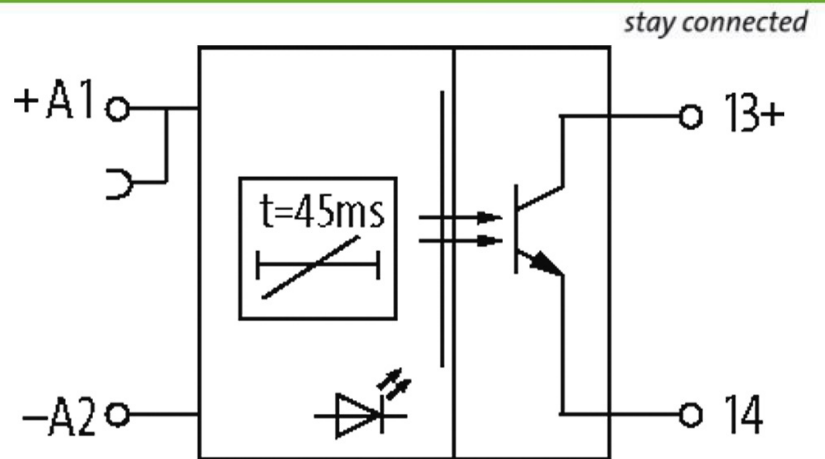

Product may differ from Image

General data

Test isolation voltage	no galvanic separation
Dimensions H x W x D	91x6.2x70 mm
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C (storage temperature -40...+80 °C)

Output

Switching voltage	2...30 V DC
Switching current per output	max. 25 mA
Min. load current	0.1 mA
Switching frequency	max. 20 Hz

Commercial data

country of origin	CZ
customs tariff number	85364110
EAN	4048879411608
eClass	27210990
Packaging unit	1