
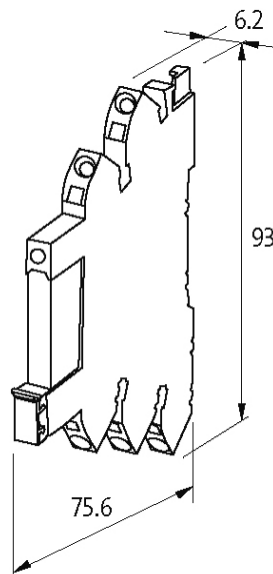


**MIRO 6.2 pluggable compl. Module Optocoupler**

IN: 24 VDC - OUT: 24 VDC / 6 A

Transistor 6 A  
24 V DC  
Spring clamp terminals  
Complete module

[Link to Product](#)**Illustration**

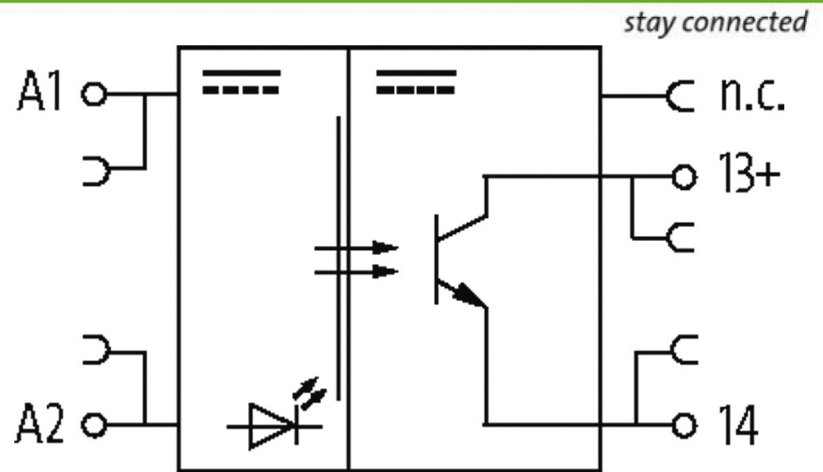

Product may differ from Image

### Input

Connection voltage - current	24 V DC (18...30 V DC) - 9 mA
LED display	LED (yellow)

### General data

Test isolation voltage	50 V
Surge voltage resistance	2.5 kV
Protection	IP20
Mounting method	pluggable
Dimensions H x W x D	93x6.2x75.6 mm
Temperature range	-25...+50 °C

### Output

Switching time ON/OFF	15/31 µs
Switching voltage	3...30 V DC
Switching current per output	10 mA...6 A
Saturation voltage (across output)	max. 240 mV
Switching frequency	max. 500/50 Hz (resist./ind.)

### Commercial data

country of origin	CZ
customs tariff number	85365005
EAN	4048879532747
eClass	27371604
Packaging unit	1